

VIDVIE PRODUCT CATALOG

VIDVIE

<https://vidvietech.com/>

Foshan
Office: D1-03, Building D, Nanhai New Economic Industry Center,
No. 1 Xianan Road, Guicheng Street, Nanhai District, Foshan City, Guangdong

Shop NO.1 : No. 127, the 1st floor, Guangzhou the thirteen-hongs Culture and Technology Center, Exhibition
Building on the right side of New Asia, No. 37 Xidi Erma Road, Liwan District, Guangzhou

Shenzhen
RmY2-5F-03, No.5 Creative Zone, Yayuan Road, Bantian Street, Longgang District, Shenzhen, China

Shop NO.2 : A46-47, 1/F, Yale Smart Wearable International Market, Block D, Electronic & Technology Building,
Huaqiang North, Shenzhen

Contact Us:

✉ business@vidvietech.com

☎ +86 18565066884

🌐 Rain-VIDVIE

Super Design. Top Life >>>

BRAND INTRODUCTION

VIDVIE

ESTABLISH

VIDVIE was founded in 2015, by the Hong kong Yifeng Trade Co., Ltd. and Shenzhen Eslite Ai Fengcheng products trading companyCo founded a set of R & D, production and sales as one of the new electronic products brand. Professional engaged in mobile phone charger,Mobile power, headset, Bluetooth and other electronic products development, production and sales. VIDVIE to provide better quality of mobile phone Accessories products, strict quality, novel design, product sales at home and abroad, especially in Europe, America and other places.

Economic globalization unceasingly fuses in every field all over the world, in the process of the rapid development of the electronic age VIDVE urgent need to build a strong center, VIDVIE will assume a higher level of service in the service area.2015, Hong Kong Yifeng Trade Co Ltd and Shenzhen Eslite Ai Feng Commodities Trading Company on Foreign investment in electronic products provide the basic conditions for the establishment and development VIDVIE and focus on brand innovation by starting on this basis, to create broader areas, richer type, more professional electronic products of foreign trade projects, initially established regional image, enhance brand value.

PURPOSE

VIDVIE brand to "create value, achievement professional" for the purpose, "let customers experience the fashion trend of electronic product development", for the global many countries to develop, design a reasonable product style and effective marketing plan, and establish a highly efficient internal management system and the life of enterprise culture atmosphere, in the international market to establish a good reputation, highlighting the company's brand value, this is to further improve the global sales network has laid a solid foundation.

TEAM

Our designer is a group of common ideal and passionate team. As an important member of VIDVIE brand, we focus on design, and insist on our design concept. We advocate more art pursuit of the perfect combination of art and design. VIDVIE brand design team have brand visual designers, product designer, graphic designer... , etc., assembled in the field of multiple design strength, the design has a unique design ideas and consciousness; Aspires to be a mobile phone peripheral electronic products, driving and leading the charge.



2024

Product Catalog >>>



Brand Category

VIDVIE

	British Plug Charger	02
CHARGER-SERIES	European Plug Charger	11
	US Plug Charger	21
	USB Socket	35
TWS TRUE WIRELESS HEADSET		37
WIRELESS EARPHONE		47
WIRELESS SPEAKERS		53
WIRED HEADSET		63
POWER BANK		71
DATA CABLE		95
HDMI CABLE		125
CAR CHARGER		131
CAR BRACKET		141
WIRELESS CHARGER		151
GLASS FILMS AND PROTECTIVE CASES		161
STORAGE AND LIFE		171
GIFT BOX & SET		191
AUTOMOBILE PRODUCTS		195
PROJECTION PRODUCTS		199
DISPLAY RACK MATERIALS		201

VIDVIE-X

	British Plug Charger	206
	European Plug Charger	207
CHARGER-SERIES	US Plug Charger	208
	Wireless Speakers	209

CHARGER



BRITISH PLUG CHARGER




PLB118
 Input: AC 100V-240V~50/60Hz 0.3A
 Output: 5V / 2.4A
 Size: 60 X 48 X 54mm
 Ports: 2 X USB
 Working Temperature: -10°C - 50°C
12W 



PLB119
 Input: AC 100V-240V~50/60Hz 0.3A
 Output: 5V / 2.4A
 Size: 47 X 26 X 78mm
 Ports: 2 X USB
 Working Temperature: -10°C - 50°C
12W 



PLB133
 Input: AC 100V-240V~50/60Hz 0.3A
 Output: 5V / 2.4A
 Size: 79 X 50 X 48mm
 Ports: 2 X USB
 Working Temperature: -10°C - 50°C
12W 



PLB131
 Input: AC 100V-240V~50/60Hz 0.5A
 Output: 5V / 4.8A
 Size: 81 X 48 X 30.5mm
 Ports: 3 X USB
 Working Temperature: -10°C - 50°C
4.8A 





UK PLB140

Input: AC 100~240V, 50/60Hz 0.3A
Output: DC 5V / 2.4A (MAX)
Size: 45 X 73.5 X 40mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C

12W



UK PLB142

Input: AC 100V~240V~50/60Hz, 1.5A(Max)
Output: USB-C1/C2: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡3.35A, 67W(Max)
USB-A: 4.5V≡5A, 5V≡4.5A, 9V≡2A, 12V≡1.5A 22.5W(MAX)
USB-C1+USB-C2: 45W+20W 65W(Max)
USB-C1+USB-A: 45W+18W 63W(Max)
USB-C2+USB-A: 5V≡3.6A 18W(Max)
USB-C1+USB-C2+USB-A: 45W+18W 63W(Max)
PPS: 3.3~20.3V/3.3A Size: 31.8 X 84 X 37mm Ports: 3 X USB
Working Temperature: 0°C - 40°C



UK PLB141C

Input: 100V~240V~50/60Hz 0.8A Max
Output: USB-C 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
PPS: 3.3V~11V/3A 33W Max
Size: 48.9 X 68.5 X 43.4mm
Port: 1 X USB
Working Temperature: -10°C - 50°C

33W



UK PLB146

Input: AC 100V~240V~50/60Hz, 1.2A(Max)
Output: USB-C1: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡2.5A, 20V≡2A 40W(Max) PPS: 3.3V~11V 3A
USB-C2: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡2.5A, 20V≡2A 40W(Max) PPS: 3.3V~11V≡3A
USB-C1+USB-C2 total output: PD 25W+PD 15W or PD 35W+5W or PD 20W+PD 20W
Size: 48.7 X 44 X 69.7 mm Ports: 2 X USB
Working Temperature: 0°C - 40°C

40W



UK PLB137C-Q

Input: AC 100~240V, 0.8A Max
USB-A output: DC 5V/4A, 9V/3A, 12V/2.5A
Type-C output: DC 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20/1.5A
PPS: DC 11V/3A 33W Max
USB-A+Type-C output: 5V/3A
Size: 82.2*44.6*48mm
Ports: 2 X USB
Working Temperature: 0°C - 40°C

PD 33W QC 4.0



UK PLB143

Input: AC 110~230V 50/60Hz 0.5A
USB-A output: DC 5V/3A, 9V/2A, 12V/1.5A (18W)
Type-C output: DC 5V/3A, 9V/2.22A, 12V/1.67A (20W)
USB-A+Type-C output: DC 5V/3A (15W)
Ports: 2-USB Product size: 43.8*28.4*73mm
Product weight: 45.3g
Working temperature: -10°C - 50°C

PD 20W





UK PLB147

Input: 100-240V~50/60Hz, 2.5A Max.
 Output: USB-C1: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡5A, 100W(Max) USB-C2: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡5A, 100W(Max) PPS:3.3-11V≡3A
 USB-A1: 4.5V≡5A, 5V≡4.5A, 5V≡3A, 9V≡2A, 12V≡1.5A, 22.5W(Max) USB-A2: 4.5V≡5A, 5V≡4.5A, 5V≡3A, 9V≡2A, 12V≡1.5A, 22.5W(Max) USB-C1+USB-C2: 65W+30W 95W(Max) USB-C1+USB-A1: 65W+18W 83W(Max) USB-C1+USB-A2: 65W+18W 83W(Max) USB-C2+USB-A1: 65W+18W 83W(Max) USB-C2+USB-A2: 65W+18W 83W(Max) USB-A1+USB-A2: 22.5W(Max) USB-C1+USB-C2+USB-A1: 45W+30W+18W 93W(Max) USB-C1+USB-C2+USB-A2: 45W+30W+18W 93W(Max) USB-C1+(USB-A1+USB-A2): 65W+22.5W 87.5W(Max) USB-C2+(USB-A1+USB-A2): 65W+22.5W 87.5W(Max) USB-C1+USB-C2+(USB-A1+USB-A2): 45W+30W+22.5W 97.5W (Max) Ports: 4-USB
 Product size: 85*85*26.3mm Product weight: 277g
 Working temperature:-10 °C-50 °C

PLB147



UK PLB144

Input: AC 110-230V 50/60Hz 0.3A
 Output: DC 5V/2.4A (MAX)
 Port: 1-USB Product size: 43.8*28.4*73mm
 Product weight: 37.6g
 Working temperature: -10 °C-50 °C

12W



UK PLB145

Input: AC 110-230V 50/60Hz 0.3A
 Output: DC 5V/2.4A (MAX)
 Ports: 2-USB Product size: 43.8*28.4*73mm
 Product weight: 38.7g
 Working temperature: -10 °C-50 °C

12W



20W



UK PLB148

Input: AC 100-240V, AC 50/60Hz
 USB-A output: DC 5V≡3A, 9V≡2.22A, 12V≡1.67A
 Type-C output: DC 5V≡3A, 9V≡2.22A, 12V≡1.67A
 USB-A+Type-C output: DC 5V≡3A
 Ports: 2-USB
 Product size: 49*74*38.7mm
 Product weight: 45.3g
 Working temperature: -10°C - 70°C

20W



QC 3.0



UK PLB149

Input: AC 100-240V, AC 50/60Hz
 Output: QC 3.0 5V≡3A, 9V≡2A, 12V≡1.5A
 Port: 1-USB
 Product size: 49*74*38.7mm
 Product weight: 41.16g
 Working temperature: -10°C - 70°C

QC 3.0



UK PLB150

Input: AC 100-240V, AC 50/60Hz
 Output: DC 5V 2.4A
 Ports: 2-USB
 Product size: 49*74*38.7mm
 Product weight: 37.5g
 Working temperature: -10°C - 70°C

12W





PLB153



UK PLB151

Input: AC 100V-240V~50/60Hz, 1.5A(Max)
Output: USB-C1: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.35A (67W Max)
USB-C2: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.35A (67W Max)
PPS: 3.3V~11V/4.5A USB-C1+USB-C2: PD45W+PD20W
USB-C1+USB-C2: 67W Max. Ports: 2-USB
Product size: 44*73*39mm Product weight: 115.3g
Color: White Working temperature: 0°C~40°C



UK PLB153

Input: AC 100-240V~50/60Hz 0.8A(Max)
Output: DC 5V=3A, 9V=2.22A, 12V=1.67A 20W
Port: 1X Type-C
Product size: 48*43*64mm
Product weight: 48.3g
Working temperature: 0°C~40°C



UK PLB154

Input: AC 100-240V~50/60Hz 0.8A(Max)
Output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A
Port: 1X Type-C PPS: 3.3V~11V 3A 33W Max
Product size: 48*43*64mm
Product weight: 53.8g
Working temperature: 0°C~40°C



UK PLB155

Input: AC 100-240V~50/60Hz 0.8A(Max)
Output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A
USB Output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A
Port: Type-C+USB PPS: 3.3V~11V 3A 33W Max
Product size: 48*43*64mm
Product weight: 51.1g
Working temperature: 0°C~40°C



UK PLB156

Input: AC 100-240V~50/60Hz 0.8A Max
Output: 5V=3A, 9V=2.22A, 12V=1.67A, 20V
Total power: 20W Max Interface: Type-C
Product size: 48*43*64mm
Product weight: 53.8g
Working temperature: 0°C~40°C



UK PLB157

Input: AC 100-240V~50/60Hz 0.8A Max
Output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A
PPS: 3.3V~11V=3A 33W Max Total power: 33W Max
Interface: Type-C Product size: 48*43*64mm
Product weight: 53.8g
Working temperature: 0°C~40°C



UK PLB158

Input: 100-240V~50/60Hz 0.8A Max
Type-C Output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A PPS: 3.3V~11V 3A 33W Max
USB Output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A Total power: 33W Max
Interface: Type-C Product size: 48*43*64mm
Product weight: 53.8g
Working temperature: 0°C~40°C





UK PLB159

Input: 100-240V~50/60Hz 1.5A Max.
 USB-C1 output: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡3.5A (70W)
 USB-C2 output: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡3.5A (70W)
 USB-A1 output: 5V≡3A, 9V≡3A, 12V≡2.5A, 15V≡2A, 20V≡1.5A (30W)
 USB-A2 output: 5V≡3A, 9V≡3A, 12V≡2.5A, 15V≡2A, 20V≡1.5A (30W)
 Total output: 47W+5V≡3.1A
 Size: 85*85*27mm
 Product weight: 134.5g
 Operating temperature: -10°C-50°C

PLB159



PLB161

New

PD 33W



UK PLB160

Input: AC 100-240V 50/60Hz 0.5A
 Type-C1 output: DC 5V≡3A, 9V≡3A, 12V≡2.5A(30W)
 PPS: 3.3-11V≡3A 33W
 Type-C2 output: DC 5V≡3A, 9V≡3A, 12V≡2.5A(30W)
 PPS: 3.3-11V≡3A 33W
 Type-C1+Type-C2 output: DC 5V≡3A (15W)
 Product size: 49.4*43.2*72mm Product weight: 59.3g
 Working temperature: 0°C - 40°C

33W



New

PD 45W



UK PLB161

Input: AC 100-240V 50/60Hz 0.5A
 Type-C1 output: DC 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡2.25A (45W) PPS: 3.3-11V≡3A 33W
 Type-C2 output: DC 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡2.25A (45W) PPS: 3.3-11V≡3A 33W
 Type-C1+Type-C2 output: 25W+20W
 Product size: 49.4*47.5*77mm Product weight: 81.7g
 Working temperature: 0°C - 40°C

45W



New

MAX 65W

USB 22.5W



UK PLB162

Input: 110-240V~50/60Hz 1.5A Max
 Type-C1/Type-C2 output: DC 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡3.25A(65W Max)
 USB output: DC 5V≡3A, 9V≡2.5A, 12V≡1.87A(22.5W Max)
 Type-C1+Type-C2 output: 45W+20W(65W Max)
 Type-C1+USB output: 45W+18W(63W Max)
 Type-C2+USB output: DC 5V≡2.4A+DC 5V≡2.4A(24W Max)
 Type-C1+Type-C2+USB output: 45W+10W+10W(65W Max)
 Product size: 56.3*49*89mm Product weight: 130g
 Working temperature: 0°C - 40°C

65W



EUROPEAN PLUG CHARGER



PLE216

Input: AC 100V~240V~50/60Hz 0.3A
Output: 5V / 2.4A
Size: 83 X 40 X 26mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C

12W



PLE218

Input: AC 100V~240V~50/60Hz 0.3A
Output: 5V / 2.4A
Size: 60 X 48 X 66mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C

12W



PLE219

Input: AC 100V~240V~50/60Hz 0.3A
Output: 5V / 2.4A
Size: 47 X 25 X 88mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C

12W



PLE223Q

Input: AC 100V~240V~50/60Hz 0.5A
Output: 5V / 3A, 9V / 2A, 12V / 1.5A (18W MAX)
Size: 45.5 X 89.5 X 27mm
Ports: 1 X USB
Working Temperature: -10°C - 50°C



PLE230C

Input: AC 100V~240V~50/60Hz 0.7A
Output: USB-A: 5V / 3A, 9V / 2A, 12V / 1.5A
TYPE-C: 5V / 3A, 9V / 2.25A, 12V / 1.6A (20W MAX)
Size: 87 X 48 X 30.5mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C



PLE231

Input: AC 100V~240V~50/60Hz 0.7A
Output: USB-A: 5V / 4.8A
Size: 87 X 48 X 30.5mm
Ports: 3 X USB
Working Temperature: -10°C - 50°C



PLE236C

Input: AC 100V~240V~50/60Hz 0.5A
Output: 5V / 3A, 9V / 2.2A, 12V / 1.67A (20W MAX)
Size: 35 X 68.5 X 33mm
Ports: 1 X USB
Weight: 40.5g
Working Temperature: -10°C - 50°C



PLE237C-Q

Input: AC100~240V, 0.8A Max
USB-A output: DC 5V/4A, 9V/3A, 12V/2.5A
Type-C output: DC 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20/1.5A
PPS: DC 11V/3A 33W Max
USB-A+Type-C output: 5V/3A
Size: 82.2 X 43.5 X 25.7mm
Ports: 2 X USB
Working Temperature: 0°C - 40°C





PLE240

Input: AC 100~240V, 50/60Hz 0.3A
Output: DC 5V / 2.4A (MAX)
Size: 44.7 X 26.8 X 80.8mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C

12W



33W GaN



PLE241C

Input: 100V~240V~50/60Hz 0.8A Max
Output: USB-C 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
PPS: 3.3V-11V/3A 33W Max
Size: 31 X 68 X 32mm
Port: 1 X USB
Working Temperature: -10°C - 50°C

33W



PLE242

Input: AC 100V~240V~50/60Hz, 1.5A(Max)
Output: USB-C1/C2: 5V==3A, 9V==3A, 12V==3A, 15V==3A, 20V==3.35A, 67W(Max)
USB-A: 4.5V==5A, 5V==4.5A, 9V==2A, 12V==1.5A 22.5W(MAX)
USB-C1+USB-C2: 45W+20W 65W(Max)
USB-C1+USB-A: 45W+18W 63W(Max)
USB-C2+USB-A: 5V==3.6A 18W(Max)
USB-C1+USB-C2+USB-A1: 45W+18W 63W(Max)
PPS: 3.3-20.3V/3.3A Size: 31.8 X 95.3 X 37mm
Ports: 3 X USB
Working Temperature: 0°C - 40°C



PLE243

Input: AC 110V~240V
Output: USB-A: DC 5V/2.4A, 9V/2A, 12V/1.5A (18W)
Type-C: DC 5V/2.4A, 9V/2.22A, 12V/1.5A (20W)
USB-A+Type-C output: 20W
Size: 80 X 40 X 27mm
Ports: 2 X USB
Working Temperature: 50°C ±3°C

PD 20W





PLE244



PLE244

Input: AC 110-240V
Output: DC 5V/2.4A (MAX)
Size: 44 X 26 X 63mm
Ports: 1 X USB
Working Temperature: -10°C - 50°C

12W



PLE245

Input: AC 110-240V
Output: DC 5V / 2.4A (MAX)
Size: 44 X 26 X 63mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C

12W



40W
GaN



PLE246

Input: AC 100V-240V~50/60Hz, 1.2A(Max)
Output: USB-C1: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡2.5A, 20V≡2A 40W(Max) PPS: 3.3V~11V≡3A
USB-C2: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡2.5A, 20V≡2A 40W(Max) PPS: 3.3V~11V≡3A
USB-C1+USB-C2 total output:
PD 25W+PD 15W or PD 35W+5W or PD 20W+PD 20W
Size: 40.9 X 80.9 X 30.9mm Ports: 2 X USB
Working Temperature: 0°C - 40°C

40W



20W



PLE248

Input: AC 100-240V, AC 50/60Hz
USB-A output: DC 5V≡3A, 9V≡2.22A, 12V≡1.67A
Type-C output: DC 5V≡3A, 9V≡2.22A, 12V≡1.67A
USB-A+Type-C output: DC 5V≡3A
Ports: 2-USB
Product size: 49*80*38.7mm
Product weight: 42.35g
Working temperature: -10°C - 70°C

20W



QC 3.0



PLE249

Input: AC 100-240V, AC 50/60Hz
Output: QC 3.0 5V≡3A, 9V≡2A, 12V≡1.5A
Port: 1-USB
Product size: 49*80*38.7mm
Product weight: 39.9g
Working temperature: -10°C - 70°C

QC 3.0



PLE250

Input: AC 100-240V, AC 50/60Hz
Output: DC 5V≡2.4A
Ports: 2-USB
Product size: 49*80*38.7mm
Product weight: 36.2g
Working temperature: -10°C - 70°C

12W



67W
GaN



PLE251

Input: AC 100V-240V~50/60Hz, 1.5A(Max)
Output: USB-C1: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡3.35A (67W Max)
USB-C2: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡3.35A (67W Max)
PPS: 3.3V~11V/4.5A USB-C1+USB-C2: PD45W+PD20W
USB-C1+USB-C2: 67W Max. Ports: 2-USB
Product size: 44*84*39mm Product weight: 107g
Color: White Working temperature: 0°C - 40°C

67W





PLE247



EU PLE247

Input: 100-240V~50/60Hz, 2.5A Max.
Output: USB-C1: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡5A, 100W(Max) USB-C2: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡5A, 100W(Max) PPS: 3.3~11V≡3A
USB-A1: 4.5V≡5A, 5V≡4.5A, 5V≡3A, 9V≡2A, 12V≡1.5A, 22.5W(Max) USB-A2: 4.5V≡5A, 5V≡4.5A, 5V≡3A, 9V≡2A, 12V≡1.5A, 22.5W(Max) USB-C1+USB-C2: 65W+30W 95W(Max) USB-C1+USB-A1: 65W+18W 83W(Max) USB-C1+USB-A2: 65W+18W 83W(Max) USB-C2+USB-A1: 65W+18W 83W(Max) USB-C2+USB-A2: 65W+18W 83W(Max) USB-A1+USB-A2: 22.5W(Max) USB-C1+USB-C2+USB-A1: 45W+30W+18W 93W(Max) USB-C1+USB-C2+USB-A2: 45W+30W+18W 93W(Max) USB-C1+(USB-A1+USB-A2): 65W+22.5W 87.5W(Max) USB-C2+(USB-A1+USB-A2): 65W+22.5W 87.5W(Max) USB-C1+USB-C2+(USB-A1+USB-A2): 45W+30W+22.5W 97.5W (Max) Ports: 4-USB
Product size: 85*85*26.3mm Product weight: 277g
Working temperature: -10 °C-50 °C

New
PD
20W



UK PLE253

Input: 100-240V~50/60Hz 0.8A(Max)
Output: 5V≡3A, 9V≡2.22A, 12V≡1.67A 20W
Port: 1 X Type-C
Product size: 72*32.5*32.5mm
Product weight: 42.9g
Working temperature: 0 °C-40 °C

20W



New
PD
33W



UK PLE254

Input: 100-240V~50/60Hz 0.8A(Max)
Output: 5V≡3A, 9V≡3A, 12V≡2.5A, 15V≡2A, 20W≡1.5A
Port: 1 X Type-C PPS: 3.3V~11V 3A 33W Max
Product size: 72*32.6*32.5mm
Product weight: 48.8g
Working temperature: 0 °C-40 °C

33W



New
PD
33W
USB
30W



UK PLE255

Input: 100-240V~50/60Hz 0.8A(Max)
Type-C Output: 5V≡3A, 9V≡3A, 12V≡2.5A, 15V≡2A, 20W≡1.5A
USB Output: 5V≡3A, 9V≡3A, 12V≡2.5A, 15V≡2A, 20W≡1.5A
Port: Type-C+USB PPS: 3.3V~11V 3A 33W Max
Product size: 72*32.5*32.5mm
Product weight: 46.6g
Working temperature: 0 °C-40 °C

33W



New
PD
20W



UK PLE256

Input: AC 100-240V~50/60Hz 0.8A Max
Output: 5V≡3A, 9V≡2.22A, 12V≡1.67A, 20W
Total power: 20W Max Interface: Type-C
Product size: 48*43*64mm
Product weight: 53.8g
Working temperature: 0 °C - 40 °C

20W



New
PD
33W



UK PLE257

Input: AC 100-240V~50/60Hz 0.8A Max
Output: 5V≡3A, 9V≡3A, 12V≡2.5A, 15V≡2A, 20V≡1.5A
PPS: 3.3V~11V≡3A 33W Max Total power: 33W Max
Interface: Type-C Product size: 48*43*64mm
Product weight: 53.8g
Working temperature: 0 °C - 40 °C

33W



New
PD
33W
USB
30W



UK PLE258

Input: 100-240V~50/60Hz 0.8A Max
Type-C Output: 5V≡3A, 9V≡3A, 12V≡2.5A, 15V≡2A, 20V≡1.5A PPS: 3.3V~11V 3A 33W Max
USB Output: 5V≡3A, 9V≡3A, 12V≡2.5A, 15V≡2A, 20V≡1.5A Total power: 33W Max
Interface: Type-C Product size: 48*43*64mm
Product weight: 53.8g
Working temperature: 0 °C - 40 °C

33W





PLE259

Input: 100-240V~50/60Hz 1.5A Max.
 USB-C1 output: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.5A (70W)
 USB-C2 output: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.5A (70W)
 USB-A1 output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A (30W)
 USB-A2 output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A (30W)
 Total output: 47W+5V=3.1A
 Size: 85*85*27mm
 Product weight: 134.5g
 Operating temperature: -10°C-50°C

PLE259



PLE261

New

PD 33W



PLE260

Input: AC 100-240V 50/60Hz 0.5A
 Type-C1 output: DC 5V=3A, 9V=3A, 12V=2.5A(30W)
 PPS: 3.3-11V=3A 33W
 Type-C2 output: DC 5V=3A, 9V=3A, 12V=2.5A(30W)
 PPS: 3.3-11V=3A 33W
 Type-C1+Type-C2 output: DC 5V=3A (15W)
 Product size: 30.6*43.2*79.5mm Product weight: 58.23g
 Working temperature: 0°C - 40°C

33W



New

PD 45W



PLE261

Input: AC 100-240V 50/60Hz 0.5A
 Type-C1 output: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A (45W) PPS: 3.3-11V=3A 33W
 Type-C2 output: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A (45W) PPS: 3.3-11V=3A 33W
 Type-C1+Type-C2 output: 25W+20W
 Product size: 47.5*30.7*84.5mm Product weight: 79.7g
 Working temperature: 0°C - 40°C

45W



New

MAX 65W

USB 22.5W



PLE262

Input: 110-240V~50/60Hz 1.5A Max
 Type-C1/Type-C2 output: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A(65W Max)
 USB output: DC 5V=3A, 9V=2.5A, 12V=1.87A(22.5W Max)
 Type-C1+Type-C2 output: 45W+20W(65W Max)
 Type-C1+USB output: 45W+18W(63W Max)
 Type-C2+USB output: DC 5V=2.4A+DC 5V=2.4A(24W Max)
 Type-C1+Type-C2+USB output: 45W+10W+10W(65W Max)
 Product size: 56.3*29*97mm Product weight: 131.2g
 Working temperature: 0°C - 40°C

65W



US PLUG CHARGER



PLM319

Input: AC 100V~240V~50/60Hz 0.3A
Output: 5V / 2.4A
Size: 72 X 48 X 25mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C

12W



PLM323Q

Input: AC 100V~240V~50/60Hz 0.5A
Output: 5V / 3A, 9V / 2A, 12V / 1.5A (QC 18W MAX)
Size: 69 X 45.5 X 27mm
Ports: 1 X USB
Working Temperature: -10°C - 50°C

18W



PLM323C

Input: AC 100V~240V~50/60Hz 0.7A
Output: USB-A: 5V / 3A, 9V / 2A, 12V / 1.5A (QC 18W MAX)
TYPE-C: 5V / 3A, 9V / 2.25A, 12V / 1.6A (20W MAX)
Size: 69 X 45.5 X 27mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C

PD 20W




PLM330C

Input: AC 100V~240V~50/60Hz 0.3A
Output: USB-A: 5V / 3A, 9V / 2A, 12V / 1.5A (QC 18W MAX)
TYPE-C: 5V / 3A, 9V / 2.25A, 12V / 1.6A (20W MAX)
Size: 67 X 48 X 30.5mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C

PD 20W



PLM331



PLM331

Input: AC 100V~240V~50/60Hz 0.5A
Output: 5V / 4.8A
Size: 67 X 48 X 30.5mm
Ports: 3 X USB
Working Temperature: -10°C - 50°C

3



PLM333

Input: AC 100V~240V~50/60Hz 0.3A
Output: 5V / 2.4A
Size: 66 X 48 X 30mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C

12W



PLM335C

Input: AC 100V~240V~50/60Hz 0.7A
Output: TYPE-C: 5V / 3A, 9V / 2.25A, 12V / 1.6A (20W MAX)
Size: 59 X 40 X 27mm
Port: 1 X USB
Working Temperature: -10°C - 50°C

PD 20W



PLM335C-Q

Input: AC 100V~240V~50/60Hz 0.7A
Output: USB-A: 5V / 3A, 9V / 2A, 12V / 1.5A (QC 18W MAX)
TYPE-C: 5V / 3A, 9V / 2.25A, 12V / 1.6A (20W MAX)
Size: 59 X 40 X 27mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C

20W





PLM337C-Q



PLM340



PLE336C

Input: AC 100V~240V~50/60Hz 0.5A
Output: 5V / 3A, 9V / 2.2A, 12V / 1.67A (20W MAX)
Size: 47 X 35 X 33mm
Ports: 1 X USB
Weight: 38.7g
Working Temperature: -10°C - 50°C

PD 20W



PLM340

Input: AC 100~240V, 50/60Hz 0.3A
Output: DC 5V / 2.4A (MAX)
Size: 44.7 X 26.8 X 60.4mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C

12W



PLM337C-Q

Input: AC100~240V, 0.8A Max
USB-A output: DC 5V/4A, 9V/3A, 12V/2.5A
Type-C output: DC 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20/1.5A
PPS: DC 11V/3A 33W Max
USB-A+Type-C output: 5V/3A
Size: 61.2 X 43.5 X 25.7mm
Ports: 2 X USB
Working Temperature: 0°C - 40°C

PD 33W QC 4.0



PLM341C

Input: 100V~240V~50/60Hz 0.8A Max
Output: USB-C 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A
PPS: 3.3V~11V/3A 33W Max
Size: 31 X 49 X 32mm
Port: 1X USB
Working Temperature: -10°C - 50°C

33W



PLM342

Input: AC 100V~240V~50/60Hz, 1.5A(Max)
Output: USB-C1/C2: 5V~3A, 9V~3A, 12V~3A, 15V~3A, 20V~3.35A, 67W(Max)
USB-A: 4.5V~5A, 5V~4.5A, 9V~2A, 12V~1.5A 22.5W(MAX)
USB-C1+USB-C2: 45W+20W 65W(Max)
USB-C1+USB-A: 45W+18W 63W(Max)
USB-C2+USB-A: 5V~3.6A 18W(Max)
USB-C1+USB-C2+USB-A1: 45W+18W 63W(Max)
PPS: 3.3~20.3V/3.3A Size: 31.8 X 76.6 X 37mm
Ports: 3 X USB
Working Temperature: 0°C - 40°C



PLM343

Input: AC 110V~240V
Output: USB-A: DC 5V/2.4A, 9V/2A, 12V/1.5A (18W)
Type-C: DC 5V/2.4A, 9V/2.22A, 12V/1.5A (20W)
USB-A+Type-C output: 20W
Size: 58.6 X 39 X 26mm
Ports: 2 X USB
Working Temperature: 50°C ±3°C

PD 20W Qualcomm 3.0





PLM345



 **PLM344**

Input: AC 110-240V
Output: DC 5V/2.4A (MAX)
Size: 44 X 26 X 62.3mm
Port: 1 X USB
Working Temperature: -10°C - 50°C

 **12W**



 **PLM345**

Input: AC 110-240V
Output: DC 5V / 2.4A (MAX)
Size: 44 X 26 X 62.3mm
Ports: 2 X USB
Working Temperature: -10°C - 50°C

 **12W**



 **PLM346**

Input: AC 100V-240V~50/60Hz, 1.2A(Max)
Output: USB-C1: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡2.5A, 20V≡2A 40W(Max) PPS: 3.3V~11V≡3A
USB-C2: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡2.5A, 20V≡2A 40W(Max) PPS: 3.3V~11V≡3A
USB-C1+USB-C2 total output:
PD 25W+PD 15W or PD 35W+5W or PD 20W+PD 20W
Size: 40.9 X 59.9 X 30.9mm Ports: 2 X USB
Working Temperature: 0°C - 40°C

40W 



 **PLM348**

Input: AC 100-240V, AC 50/60HZ
USB-A output: DC 5V≡3A, 9V≡2.22A, 12V≡1.67A
Type-C output: DC 5V≡3A, 9V≡2.22A, 12V≡1.67A
USB-A+Type-C output: DC 5V≡3A
Ports: 2-USB
Product size: 49*61.4*38.7mm
Product weight: 40.2g
Working temperature: -10°C - 70°C

20W 



 **PLM347**

Input: 100-240V~50/60Hz, 2.5A Max.
Output: USB-C1: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡5A, 100W(Max) USB-C2: 5V≡3A, 9V≡3A, 12V≡3A, 15V≡3A, 20V≡5A, 100W(Max) PPS: 3.3-11V≡3A
USB-A1: 4.5V≡5A, 5V≡4.5A, 5V≡3A, 9V≡2A, 12V≡1.5A, 22.5W(Max) USB-A2: 4.5V≡5A, 5V≡4.5A, 5V≡3A, 9V≡2A, 12V≡1.5A, 22.5W(Max) USB-C1+USB-C2: 65W+30W 95W(Max) USB-C1+USB-A1: 65W+18W 83W(Max)
USB-C1+USB-A2: 65W+18W 83W(Max) USB-C2+USB-A1: 65W+18W 83W(Max) USB-C2+USB-A2: 65W+18W 83W(Max)
USB-A1+USB-A2: 22.5W(Max) USB-C1+USB-C2+USB-A1: 45W+30W+18W 93W(Max) USB-C1+USB-C2+USB-A2: 45W+30W+18W 93W(Max)
USB-C1+(USB-A1+USB-A2): 65W+22.5W 87.5W(Max) USB-C2+(USB-A1+USB-A2): 65W+22.5W 87.5W(Max) USB-C1+USB-C2+USB-A1+USB-A2: 45W+30W+22.5W 97.5W (Max) Ports: 4-USB
Product size: 85*85*26.3mm Product weight: 277g
Working temperature: -10 °C-50 °C

PLM347



QC
3.0



US PLM349

Input: AC 100-240V, AC 50/60Hz
Output: QC 3.0 5V $\equiv$ 3A, 9V $\equiv$ 2A, 12V $\equiv$ 1.5A
Port: 1-USB
Product size: 49*61.4*38.7mm
Product weight: 34.84g
Working temperature: -10°C - 70°C



67W
GaN



US PLM351

Input: AC 100V-240V~50/60Hz, 1.5A(Max)
Output: USB-C1: 5V $\equiv$ 3A, 9V $\equiv$ 3A, 12V $\equiv$ 3A,
15V $\equiv$ 3A, 20V $\equiv$ 3.35A (67W Max)
USB-C2: 5V $\equiv$ 3A, 9V $\equiv$ 3A, 12V $\equiv$ 3A,
15V $\equiv$ 3A 20V $\equiv$ 3.35A (67W Max)
PPS: 3.3V-11V/4.5A USB-C1+USB-C2: PD45W+PD20W
USB-C1+USB-C2: 67W Max Ports: 2-USB
Product size: 44*68.2*39mm Product weight: 106.7g
Color: White Working temperature: 0°C - 40°C



US PLM350

Input: AC 100-240V, AC 50/60Hz
Output: DC 5V $\equiv$ 2.4A
Ports: 2-USB
Product size: 49*61.4*38.7mm
Product weight: 31.2g
Working temperature: -10°C - 70°C



New

PD
20W



US PLM353

Input: AC 100-240V~50/60Hz 0.8A Max
Output: DC 5V $\equiv$ 3A, 9V $\equiv$ 2.22A, 12V $\equiv$ 1.67A 20W
Ports: 1X Type-C
Product size: 48.5*32.5*32.5mm
Product weight: 37.7g
Working temperature: 0°C - 40°C



New
PD
33W



US PLM354

Input: AC 100-240V~50/60Hz 0.8A Max
Output: DC 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A
Ports: 1X Type-C PPS: 3.3V~11V 3A 33W Max
Product size: 48.5*32.5*32.5mm
Product weight: 41.9g
Working temperature: 0°C - 40°C

33W



New
PD
33W
USB
30W



US PLM355

Input: AC 100-240V~50/60Hz 0.8A Max
Type-C Output: DC 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A
USB Output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A
Ports: Type-C+USB PPS: 3.3V~11V 3A 33W Max
Product size: 48.5*32.5*32.5mm
Product weight: 41g
Working temperature: 0°C - 40°C

33W



New
PD
20W



UK PLM356

Input: AC 100-240V~50/60Hz 0.8A Max
Output: 5V=3A, 9V=2.22A, 12V=1.67A, 20V
Total power: 20W Max Interface: Type-C
Product size: 48*43*64mm
Product weight: 53.8g
Working temperature: 0°C - 40°C

20W



New
PD
33W



UK PLM357

Input: AC 100-240V~50/60Hz 0.8A Max
Output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A
PPS: 3.3V~11V=3A 33W Max Total power: 33W Max
Interface: Type-C Product size: 48*43*64mm
Product weight: 53.8g
Working temperature: 0°C - 40°C

33W



New
PD
33W
USB
30W



UK PLM358

Input: 100-240V~50/60Hz 0.8A Max
Type-C Output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A PPS: 3.3V~11V 3A 33W Max
USB Output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A Total power: 33W Max
Interface: Type-C Product size: 48*43*64mm
Product weight: 53.8g
Working temperature: 0°C - 40°C

33W



UK PLM359

Input: 100-240V~50/60Hz 1.5A Max.
USB-C1 output: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.5A (70W)
USB-C2 output: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.5A (70W)
USB-A1 output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A (30W)
USB-A2 output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A (30W)
Total output: 47W+5V=3.1A
Size: 85*85*27mm
Product weight: 134.5g
Operating temperature: -10°C~50°C

PLM359





PLM361



TA4404

New

PD
33W



UK PLM360

Input: AC 100-240V 50/60Hz 0.5A
Type-C1 output: DC 5V=3A, 9V=3A, 12V=2.5A(30W)
PPS: 3.3-11V=3A 33W
Type-C2 output: DC 5V=3A, 9V=3A, 12V=2.5A(30W)
PPS: 3.3-11V=3A 33W
Type-C1+Type-C2 output: DC 5V=3A (15W)
Product size: 30.6*43.2*58.7mm Product weight: 52g
Working temperature: 0°C - 40°C

33W



New

PD
45W



UK PLM361

Input: AC 100-240V 50/60Hz 0.5A
Type-C1 output: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A (45W) PPS: 3.3-11V=3A 33W
Type-C2 output: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A (45W) PPS: 3.3-11V=3A 33W
Type-C1+Type-C2 output: 25W+20W
Product size: 47.5*30.7*63.7mm Product weight: 81.4g
Working temperature: 0°C - 40°C

45W



New

MAX
65W

USB
22.5W



UK PLM362

Input: 110-240V~50/60Hz 1.5A Max
Type-C1/Type-C2 output: DC 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A(65W Max)
USB output: DC 5V=3A, 9V=2.5A, 12V=1.87A(22.5W Max)
Type-C1+Type-C2 output: 45W+20W(65W Max)
Type-C1+USB output: 45W+18W(63W Max)
Type-C2+USB output: DC 5V=2.4A+DC 5V=2.4A(24W Max)
Type-C1+Type-C2+USB output: 45W+10W+10W(65W Max)
Product size: 56.3*29*75mm Product weight: 117.8g
Working temperature: 0°C - 40°C

65W



New

MAX
2.4A



TA4403

Material: ABS+PC
Rating: 100-250V 10A Max, 2500W
Maxinput: 100-250V 50-60Hz 0.5A
USB output: 5.0V-.2.4A
USB-A+USB-C output: 2.4A 12W Max
Rating: 10A MAX. Size: 70*47*53.5mm
Weight: 134.7g Working temperature: -10-45°C

2.4A



New

PD
20W



TA4404

Material: ABS+PC
Type-C output: 5V=3A, 9V=2.22A, 12V=1.67A 20W MAX
USB output: 5V=3A, 9V=2A, 12V=1.5A 18W MAX
Type-C+USB total output: 5V 3A MAX
Fuse rating: 8A MAX
Maximum power: 880W at 110V/1840W at 230V
Product size: 68.42*54.78*52.65mm
Product weight: 136.68g
Colour: Black Working temperature: 0°C - 40°C

20W





TA4405



TA4407

New

OUT
25W



TA4405

USB Input: 100-240V~50/60Hz 0.8A
Type-C output: 3.3-11V=2.25A(PPS) 5V=3A, 9V=2.77A, 12V=2.08A(25W) USB output: 5V=3A, 9V=2.22A, 12V=1.67A(20W)
Type-C+USB output: 15W Max Product size: 42*70*25.4mm
Product weight: 64.5g
Working temperature: 0°C - 40°C

20W 25W



New

OUT
65W



TA4407

Type-C1 output: 3.3-11V 3A, 5V/9V/12V/15V=3A, 20V=3.25A (65W Max) Type-C2 output: 3.3-11V=3A, 5V/9V/12V/15V=3A, 20V=3.25A (65W Max)
USB output: 4.5V=5A, 5V=4.5A, 9V=3A, 12V=2.5A, 20V=1.5A (30W Max)
Type-C1+Type-C2 output: 45W+18W (63W Max)
Type-C1+Type-C2+USB output: 45W+5V 3A (60W Max)
Total output: 65W Max Product size: 54*78*52.3mm
Product weight: 195.1g Working temperature: 0°C - 40°C

65W



New

OUT
33W



TA4406

Input: 100-240V~50/60Hz 0.8A
Type-C output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A(30W)
PPS: 5.5-11V=3A 33W Product size: 42*70*25.4mm
Product weight: 64g
Operating temperature: 0°C - 40°C

33W



New

OUT
100W



TA4408

Type-C1/C2/C3 out: 3.3-21V=5A(PPS)
Type-C1/C2/C3 output: 5V/9V/12V/15V=3A, 20V=5A (100W) USB output: 5V/9V/12V/20V=3A (60W)
Type-C1+C2+(C3+USB) output: 65W+20W+15W
Type-C1+C2+C3 output: 60W+20W+20W
Type-C1+USB / C2+USB output: 70W+30W
Type-C1+(C3+USB) / C2+(C3+USB) output: 80W+15W
Type-C3+USB output: 15W Max Product size: 55*100*53mm
Product weight: 297.2g Working temperature: 0°C - 40°C

100W





UK PSB01
 Input: AC 100~260V, 50/60Hz, 10A
 Power: 2400W
 USB simultaneous output: DC 5V/3.4A
 Single USB use output: DC 5V/2.4A
 Cable length: 1.8m
 Size: 274 X 58 X 32mm
 Ports: 4 X USB
 Working Temperature: 0°C ~ 60°C



UK PSB02
 Input voltage: AC 100~240V/60Hz Power: 3120W
 AC output: 100~240V/13A(Max)
 4AC total output: 13A(Max) USB-A: 5V/3A(Max)
 3USB total output: 5V/3A(Max)
 USB-C: 5V/3A, 9V/2.22A, 12V/1.67A, 20W(Max)
 Simultaneous use of USB-A+USB-C: 5V/3A
 Ports: 4-USB Product size: 310*50*34.5mm
 Product weight: 460g
 Operating temperature: -10 °C ~ 50°C



EU PSE01
 Input: AC 100~260V, 50/60Hz, 10A
 Power: 2400W
 USB simultaneous output: DC 5V/3.4A
 Single USB use output: DC 5V/2.4A
 Cable length: 1.8m
 Size: 274 X 58 X 32mm
 Ports: 4 X USB
 Working Temperature: 0°C ~ 60°C



EU PSE02
 Input voltage: AC 100~240V/60Hz Power: 2400W
 AC output: 100~240V/10A(Max)
 4AC total output: 10A(Max) USB-A: 5V/3A(Max)
 3USB total output: 5V/3A(Max)
 USB-C: 5V/3A, 9V/2.22A, 12V/1.67A, 20W(Max)
 Simultaneous use of USB-A+USB-C: 5V/3A
 Ports: 4-USB Product size: 310*50*41.3mm
 Product weight: 466g
 Operating temperature: -10 °C ~ 50°C



US PSM01
 Input: AC 100~260V, 50/60Hz, 10A
 Power: 2400W
 USB simultaneous output: DC 5V/3.4A
 Single USB use output: DC 5V/2.4A
 Cable length: 1.8m
 Size: 274 X 58 X 32mm
 Ports: 4 X USB
 Working Temperature: 0°C ~ 60°C



US PSM02
 Input voltage: AC 100~250V, 50/60Hz
 Power: 1875W AC output: 125V/15A(Max)
 4AC total output: 15A(Max) USB-A: 5V/3A(Max)
 3USB total output: 5V/3A(Max)
 USB-C: 5V/3A, 9V/2.22A, 12V/1.67A, 20W(Max)
 Simultaneous use of USB-A+USB-C: 5V/3A
 Ports: 4-USB Product size: 290*60*30mm
 Product weight: 462g
 Operating temperature: -10 °C ~ 50°C



TWS TRUE WIRELESS HEADSET



V-Pods III

Wireless version: 5.0
Battery capacity: 350mAh
Talk/music time: 30% volume 4.5h
Horn diameter: Ø13mm
Microphone sensitivity: 103dB±3
Charging time: 40 minutes
Input: 5V / 1A Weight: 34g



V-Pods S

Wireless version: 5.0
Battery capacity: 350mAh
Talk/music time: 30% volume 4.5h
Horn diameter: Ø13mm
Microphone sensitivity: 42dB±1
Charging time: 40 minutes
Input: 5V / 1A Weight: 41g



V-Pods Pro

Wireless version: 5.0
Battery capacity: 300mAh
Talk/music time: 30% volume 4.5h
Horn diameter: Ø13mm
Microphone sensitivity: 42dB±1
Charging time: 40 minutes
Input: 5V / 1A Weight: 41g



BT850

Wireless version: 5.0
Earbud Battery Capacity: 25mAh
Case Battery Capacity: 300mAh
Talk/music time: 2.5 hours
Connection Range: 10m
Charging time: 2 hours
Input: 5V / 1A



BT851

Wireless version: 5.0
Earbud Battery Capacity: 30mAh
Case Battery Capacity: 300mAh
Talk/music time: 3 hours
Connection Range: 10m
Charging time: 2 hours
Input: 5V / 1A





BT851



BT867

V Pods IV S/BT861

Wireless version: 5.1-JL6973
Battery capacity: 180mAh
Talk/music time: 30% volume 4.5h
Horn diameter: $\Phi 13\text{mm}$
Microphone sensitivity: $-42\text{dB}\pm 2$
Charging time: 2h
Input: 5V / 1A Weight: 34.2g



V Pods Pro V-BT866

Wireless version: 5.3-JL6973 Horn diameter: $\Phi 13\text{mm}$
Microphone sensitivity: $-42\pm 2\text{dB}$
Operating Time: 6-7h Charging time: 1h
Battery capacity: 35mAh Product weight: 3.6g * 2
Working temperature: $-10\sim 45^\circ\text{C}$
Charging Case Input: DC 5V / 1A
Charging time: 2h Battery capacity: 230mAh
Weight: 49.8g



MINI S-V Pods V/BT863

Wireless version: 5.0-JLAC6983D4
Battery capacity: 200mAh
Talk/music time: 50% volume 2.5h
Horn diameter: $\Phi 10\text{mm}$
Microphone sensitivity: $-86\text{dB}\pm 2$
Charging time: 1h
Input: 5V / 1A Weight: 30.3g



BT867 Double-mark ENC Call Noise Reduction TWS Wireless Earbuds

Wireless version: 5.3 Horn diameter: $\Phi 13\text{mm}$
Microphone sensitivity: -42dB
Working time: 6-7h Charging time: 1h
Working range: 10m
Headset battery capacity: 35mAh
Product weight: 3.5gx2
Working temperature: $-15\sim 50^\circ\text{C}$
Portable charging case Input: 5V
Charging time: 2h Battery capacity: 230mAh
Weight: 29.7g



Double-mark ENC noise cancellation



BT865

Wireless version: 5.3 Horn diameter: $\Phi 13\text{mm}$
Microphone sensitivity: $-42\text{dB}\pm 2\text{dB}$
Working time: 6-7h Charging time: 1h
Working range: 10m
Headset battery capacity: 35mAh
Product weight: 3.5gx2
Working temperature: $-15\sim 50^\circ\text{C}$
Portable charging case Input: 5V Charging time: 2h
Battery capacity: 230mAh Weight: 40.4g



BT868

Wireless version: 5.3 Horn diameter: $\Phi 13\text{mm}$
Microphone sensitivity: -45dB
Operating Time: 5h(60% volume) Charging time: $\leq 2\text{h}$
Battery capacity: 30mAh Product weight: 3.3g * 2
Working temperature: $-15\sim 50^\circ\text{C}$
Charging Case Input: DC 5V
Charging time: 2h Battery capacity: 500mAh
Weight: 67.3g





BT879

Wireless version: 5.3 Horn diameter: $\Phi 13\text{mm}$
 Microphone sensitivity: $-42\pm 2\text{dB}$ Working time: 5h
 Charging time: about 1h Battery capacity: 30mAh*2
 Product weight: 3.5gx2 Working temperature: $-15\sim 50^{\circ}\text{C}$
 Charging Case
 Input: DC 4.8~5.5V Charging time: about 1.5h
 Battery capacity: 400mAh Weight: 63g
 Color: White



BT872

Wireless version: 5.3 Horn diameter: $\Phi 13\text{mm}$
 Microphone sensitivity: $-42\pm 2\text{dB}$ Working time: 4h
 Charging time: 1h Working range: 10m
 Headset battery capacity: 25mAh
 Product weight: 3.7gx2 Working temperature: $-15\sim 50^{\circ}\text{C}$
 Portable charging case Input: 5V Charging time: 2h
 Battery capacity: 230mAh Weight: 55.3g
 Color: Blue/Black



BT869

Wireless version: V5.2
 Standby time: 72h
 Transmission distance: $>10\text{m}$
 Battery capacity: 100mAh
 Playing time: about 6h
 Charging voltage: 5V
 Charging interface: Type-C
 Product weight: 18g
 Working temperature: $-10\sim 60^{\circ}\text{C}$



BT870

Wireless version: 5.1 Horn diameter: $\Phi 11\text{mm}$
 Microphone sensitivity: -42dB
 Working time: about 4 hours (80% volume)
 Charging time: 1h Working range: 10m
 Headset battery capacity: 30mAh Product weight: 3.8g * 2
 Working temperature: $-15\sim 55^{\circ}\text{C}$
 Portable charging case Input: 5V Charging time: 1h
 Battery capacity: 280mAh Weight: 26.8g





BT873

Wireless version: 5.3 Horn diameter: $\Phi 13\text{mm}$
 Microphone sensitivity: $-42\text{dB}\pm 2\text{dB}$
 Working time: 4-5h Charging time: 1-2h
 Working range: 10m Headset battery capacity: 25mAh
 Product weight: 4gx2 Working temperature: $-15\sim 50^\circ\text{C}$
 Portable charging case
 Input: 5V Charging time: 2h
 Battery capacity: 200mAh Weight: 39.3g



BT875

Wireless version: 5.3 Horn diameter: $\Phi 13\text{mm}$
 Microphone sensitivity: $-42\text{dB}\pm 3\text{dB}$
 operating hours: About 8 hours (50% volume)
 Charging time: about 1.5h Working range: 10m
 Headset battery capacity: 30mAh*2
 Product weight: 3.5gx2 Working temperature: $-15\sim 50^\circ\text{C}$
 Portable charging case
 Input: 5V Charging time: about 1.5h
 Battery capacity: 200mAh Weight: 34g



BT877

Wireless version: V5.3 Horn diameter: $\Phi 10\text{mm}$
 Microphone Sensitivity: $-42\pm 3\text{dB}$
 Working time: 4.5h (80% volume) Charging time: about 1.5h
 Working range: 10m Headphone battery capacity: 30mAh*2
 Product weight: 5.7gx2 Working temperature: $-15\sim 50^\circ\text{C}$
 Portable charging case
 Input: 5V Charging time: about 1.5h
 Battery capacity: 290mAh Weight: 36.8g



BT878

Wireless version: 5.3 Horn diameter: $\Phi 13\text{mm}$
 Microphone sensitivity: $-42\text{dB}\pm 2$ Working time: 4-5h
 Charging time: 1h Battery capacity: 25mAh*2
 Product weight: 3.2g*2 Working temperature: $-10\sim 45^\circ\text{C}$
 Charging Case
 Input: DC 5V/1A Charging time: 2h
 Battery capacity: 250mAh Weight: 32.2g
 Color: Beige/White



BT880

Wireless version: 5.3 Horn diameter: $\Phi 13\text{mm}$
 Microphone sensitivity: $-42\text{dB}\pm 3\text{dB}$ Working time: 4-5h
 Charging time: 1h Battery capacity: 25mAh*2
 Product weight: 3.9gx2 Working temperature: $-15\sim 50^\circ\text{C}$
 Charging Case
 Input: DC 5V Charging time: about 1.5h
 Battery capacity: 250mAh Weight: 41.2g
 Color: Beige/White



BT882

Wireless version: 5.3 Horn diameter: $\Phi 13\text{mm}$
 Microphone sensitivity: $-42\text{dB}\pm 2$ Working time: 6-7h
 Charging time: 1h Product weight: 8.08g*2
 Working temperature: $-15\sim 50^\circ\text{C}$
 Charging Case
 Charging time: 2h Battery capacity: 300mAh
 Weight: 18.91g Color: Beige/White





BT885



BT886



BT883

Wireless version: 5.3 Speaker: Φ 13mm
Transmission distance: 10m Headphone capacity: 25mAh
Charging interface: Type-C Charging time (headphones): 1h
Music playback time: 80% volume working time 3-4h Call time: 3h
Microphone sensitivity: -42 ± 2 dB Product weight: 3.40gx2
Working temperature: $-10\sim 55^{\circ}\text{C}$ Charging case : 250mAh
Charging time (Charging case) : about 2h Weight: 38.68g



BT886

Speaker: Φ 13mm Transmission distance: ≥ 10 m
Headphone capacity: 35mAh Charging interface: Type-C
Charging time (headphone): 1-1.5h Music playback time:
About 5h Talk time: About 4h Headphone sensitivity: 107 ± 3 dB
Microphone sensitivity: -38 dB Product weight: 3.8gx2
Operating temperature: $-10\sim 55^{\circ}\text{C}$ Color: Black/White
Charging case Charging case : 300mAh
Charging time (Charging case) : about 1.5-2h Weight: 39.7g



BT884

Wireless version: 5.3 Horn diameter: Φ 13mm
Microphone sensitivity: $-42\text{dB}\pm 2$ Working time: 5-6h
Charging time: 1h Battery capacity: 35mAh*2
Product weight: 3.86gx2 Working temperature: $-15\sim 50^{\circ}\text{C}$
Charging Case
Charging time: about 2h
Battery capacity: 250mAh Weight: 41.31g
Color: Beige/White



MC01-L

Transmission protocol: 2.4G wireless protocol
Transmission distance: ≥ 10 m Sound delay: ≤ 25 ms
Microphone: $-38\text{dB}\pm 3$ dB Frequency response: 20Hz-20KHz
Sampling rate: 44.1KHz Signal-to-noise ratio: ≥ 70 dB
Working current: ≤ 12 mA Shutdown current: ≤ 20 uA
Transmitter battery: 85mAh 3.7V Receiver interface: Type-C
Battery life: 6h Charging compartment battery: 600mAh
Microphone battery: 85mAh
Charging compartment input voltage: 5V-20V
(Support fast charging and high withstand voltage input)
Current: 5V/1A Weight: 73g
Working temperature: $-10^{\circ}\text{C}\sim 50^{\circ}\text{C}$



BT885

Speaker: Φ 14.2mm Transmission distance: 10m
Headphone capacity: 50mAh Charging interface: Type-C
Charging time (headphone): 1.5h Music playback time:
About 8 hours (50% volume) Talk time: About 6 hours
Headphone sensitivity: 115 ± 3 dB Microphone sensitivity: -42 ± 3 dB
Product weight: 9.43gx2 Operating temperature: $-10\sim 55^{\circ}\text{C}$
Charging case
Charging case : 300mAh
Charging time (Charging case) : about 1.5h Weight: 66g



MC01-T

Transmission protocol: 2.4G wireless protocol
Transmission distance: ≥ 10 m Sound delay: ≤ 25 ms
Microphone: $-38\text{dB}\pm 3$ dB Frequency response: 20Hz-20KHz
Sampling rate: 44.1KHz Signal-to-noise ratio: ≥ 70 dB
Working current: ≤ 12 mA Shutdown current: ≤ 20 uA
Transmitter battery: 85mAh 3.7V Receiver interface: Lightning
Battery life: 6h Charging compartment battery: 600mAh
Microphone battery: 85mAh
Charging compartment input voltage: 5V-20V
(Support fast charging and high withstand voltage input)
Current: 5V/1A Weight: 73g
Working temperature: $-10^{\circ}\text{C}\sim 50^{\circ}\text{C}$



WIRELESS EARPHONE



BT854

Wireless version: 4.1
 Wireless chip: JIEMI
 Battery capacity: 170mAh
 Product size: 68.7 X 41 X 11.4mm
 Talk/music time: 15 hours
 Standby time: 170 hours
 Working range: 10m

- Long battery life
- High quality call
- Wireless 4.1
- Small and Lightweight



BT859

Wireless version: 5.0
 Battery capacity: 3.7V/150mAh
 Working time: 4-5h
 Charging time: 1.5 hours
 Working range: 10m
 Weight: 21g
 Material: ABS+hardware ear shell

- Long battery life
- High quality call
- Wireless 5.0
- Small and Lightweight



BT860

Wireless version: 5.0
 Battery capacity: 3.7V, 130mAh
 Working time: 10 hours
 Charging time: 2 hours
 Working range: 10m
 Material: Liquid silica gel
 Weight: 29.89g

- Long battery life
- High quality call
- Wireless 5.0
- Stereo sound



New

BT881

Wireless Version: V5.3
 Horn diameter: Φ14.2mm
 Battery capacity: 170mAh
 Playing time:
 about 18 hours (80% volume)
 Charging time: about 1.5h
 Transmission distance: 10m
 Product weight: 35.7g
 Charging interface: Type-C

- 5.3 Wireless Version
- Magnetic ear shell
- Long battery life
- Comfortable to wear



BT874

Wireless Version: V5.3
 Horn diameter: Φ10mm
 Battery capacity: 170mAh
 Playing time:
 about 18 hours (80% volume)
 Charging time: about 1.5h
 Transmission distance: 10m
 product weight: 37g
 Charging interface: Type-C

- Magnetic ear shell
- About 18h Music time
- About 16h Call time





BT871



BT876

BT871

Wireless Version: V5.2
 Battery capacity: 75mAh
 Standby time: about 75
 Playing time: about 10h
 Charging time: about 1.5h
 Transmission distance: 10m
 Charging interface: Type-C
 Product weight: 13.5g
 Working temperature: -10~60°C



V5.2
Wireless version

Battery Capacity
75mAh

Comfortable
to wear

Small size
design



BT876

Wireless Version: V5.3
 Speaker size: 15.4mm±0.05
 Battery capacity: 100mAh
 Playing time: 7 hours (80% volume)
 Charging time: about 1.5h
 Product weight: 18.2g
 Working temperature: -10~60°C



IPX5
Waterproof

Comfortable
to wear

100mAh
Battery capacity

Small and
light

High-fidelity
speakers





BBH2109



BBH2110



BBH2111



BBH2109

Wireless version: 5.0
Battery capacity: 300mAh
Working time: 20 hours
Charging time: 3 hours
Product size: 190 X 175 X 80mm
Horn diameter: Φ 40mm
Weight: 193g



BBH2110

Type: Wired headset
Interface: 3.5mm+USB
Speaker diameter: 50mm
Product weight: 338g with wire
Cable length: 2.2m
Microphone sensitivity: -40 ± 2 dB
Microphone signal-to-noise ratio: greater than 58dB
Microphone frequency response range: 100-10000Hz



BBH2108

Wireless version: 5.0
Battery capacity: 300mAh
Working time: 20 hours
Charging time: 3 hours
Product size: 190 X 175 X 80mm
Horn diameter: Φ 40mm
Weight: 193g



New



BBH2111

Wireless version: 5.3
Horn diameter: Φ 40mm
Microphone sensitivity: 42 $\pm$ 3dB
Working time: about 70h (60% volume)
Charging time: about 3h
Product battery: 3.7V/500mAh
Product weight: 211g
Working temperature: -10~60°C



New

BBH2112

Version: V5.3 Speaker: Φ 40mm
Transmission distance: ≥ 10 m
Headphone capacity: 500mAh Charging interface: Type-C
Charging time: 2h Music playback time: About 60h
Talk time: About 50h Headphone sensitivity: 115 $\pm$ 3dB
Microphone sensitivity: -42 dB Product weight: 234g
Operating temperature: -10~55°C Color: Beige/White



WIRELESS SPEAKERS



SP919



SP906



SP906

Wireless version: 5.0
Battery capacity: 1200mAh
Working time: 4 hours
Charging time: 3 hours
Output power: 3W X 2
Product size: 210 X 126 X 132mm
Weight: 622g



Long battery life



Fast connection



Wireless 5.0



Ultra-portable



SP914

Wireless version: 5.0
Battery capacity: 3600mAh
Working time: 25 hours (30% volume)
Charging time: 3 hours
Working range: 10m
Product size: 186 X 62 X 50mm
Weight: 508g



Long battery life



Fast connection



Wireless 5.0



Ultra-portable





SP919



SP920



SP916

Wireless version: 4.2
Battery capacity: 4.5A lead-acid battery
Working time: 4-5 hours
Charging time: 6 hours
Support play mode:
Wireless/TWS, FM, U disk, TF card AUX play mode
Product size: 4300 X 300 X 210mm
Weight: 7.2KG



SP919

Wireless version: 5.3
Battery capacity: 7.4V/2000mAh
Working time: ≥15h
Charging time: 3 hours
Output power: 2*15W
Product size: 71 X 181 X 71mm
Weight: 514g



SP920

Wireless version: V5.3
Output power: 50W
Battery capacity: 7.4V/4000mAh
Working time: ≥15h
Charging time: about 4h
Product weight: 1024.5g
Product size: 110*110*168mm



New



SP924

Wireless version: V5.0 Output power: 2*30W
Battery capacity: 3.7V/4000mAh
Working time: ≥4-5h (70% volume)
Charging time: 6-8h
Product weight: 2440g Product color: Black
Product size: 360*158*180mm
Operating temperature: 0C° - 55C°





SP922



SP923



SP922

Wireless version: V5.0
Output power: 3W
Battery capacity: 3.7V/600mAh
Working time: about 4-6h (50% volume)
Charging time: about 1.5h
Product weight: 211.4g
Product size: 79.6*67*79.6mm



SP923

Wireless version: V5.3
Output power: 8W
Battery capacity: 3.7V/2000 mAh
Working time: 8h (medium volume)
Charging time: 3h
Product weight: 490g
Product size: 100*100*138.5mm





SP926



SP927




SP926

Wireless version: V5.3
 Product material: Silicone + tarpaulin
 Output power: 15W Battery capacity: 3.7V/1800mAh
 Working time: About 4h (50% volume)
 Charging time: about 2.5h Product weight: 505.3g
 Product color: black
 Product size: 100mm*114mm
 Working temperature: 0C°- 55C°



SP927

Wireless version: V5.3
 Product material: Silicone + tarpaulin
 Output power: 60W(2*30W) Battery capacity: 7.4V/3600mAh
 Working time: About 6h (50% volume) Charging time: about 3h
 Product weight: 1283.7g Product color: black
 Product size: 100*228MM
 Working temperature: 0C°- 55C°





SP926



SP927

15W
Power

SP926

Battery capacity: 1800mAh Play time: 5-6h
 Charging time: 2.5h Speaker power: 5W
 Night light power: 2.4W
 Product size: 88.5*88.5*240mm
 Product weight: 390g Color: beige
 Working temperature: -10°C - 50°C

Colorful Light

Ultra Long Endurance

Touch Switch

Shocking Sound Effects

Night Light

WIRED HEADSET



HS604



HS653

Material: ABS ear shell, PVC wire
Speaker: 10mm
Audio plug: 3.5mm
Microphone: with microphone controller
Wire control: single key control
Length: 120cm
Weight: 13g Color: White/black



Reliable raw materials



HD microphone



Comfortable to wear



HS663

Product Material(s): ABS+TPE
MIC Sensitivity: -42±3db
Frequency Response: 20Hz-20kHz
Speaker Impedance: 16Ω Speaker Diameter: Φ 10mm
Plug Type: 3.5mm Cable Length: 120cm
Product Weight: 10.6g



Reliable raw materials



HD microphone



Comfortable to wear



HS662

Material: PVC
Speaker: 14.2mm
Connector: 3.5mm interface
Microphone: with microphone controller
Wire control: One-key multi-function operation
Length: 120cm
Weight: 14g Color: White



Reliable raw materials



HD microphone



Comfortable to wear



HS604

Material: ABS ear shell, TPE wire
Speaker: 14.2mm
Audio plug: Ø3.5mm
Microphone: with microphone controller
Wire control: single button control with volume adjustment
Length: 125cm
Weight: 14.7g Color: Black / White / Red



Reliable raw materials



HD microphone



Comfortable to wear



HS655

Material: ABS ear shell, TPE wire
Speaker: 14.0mm
Audio plug: 3.5mm
Microphone: with microphone controller
Wire control: play/pause, answer/hang up control
Length: 120cm
Weight: 11.7g Color: White / Black



Reliable raw materials



HD microphone



Comfortable to wear





HS664

Product Material(s): ABS+TPE
 MIC Sensitivity: -42±3db
 Frequency Response: 20Hz-20kHz
 Speaker Impedance: 16Ω±15% Speaker Diameter: Φ 14.2mm
 Plug Type: Type-C digital audio Cable Length: 120cm
 Product Weight: 13.2g



HS665

Product Material(s): ABS+TPE
 MIC Sensitivity: -42±3db
 Frequency Response: 20Hz-20kHz
 Speaker Impedance: 16Ω±15% Speaker Diameter: Φ 14.2mm
 Plug Type: Type-C digital audio Cable Length: 120cm
 Product Weight: 13g



HS666T

Product material: TPE+ABS+aluminum alloy
 Microphone sensitivity: -42±3dB
 Frequency range: 20Hz-20kHz
 Product resistance: 32Ω±15% Speaker size: 14.2mm
 Plug interface: Type-C digital audio
 Product line length: 120cm
 Product weight: 14.8g
 Operating temperature: -10℃-55℃




HS667

Product material: TPE+ABS
 Microphone sensitivity: -42±3dB
 Frequency range: 20Hz-20kHz
 Product resistance: 32Ω Speaker size: 14.2mm
 Plug interface: Lightning plug and play
 Product line length: 125cm
 Product weight: 10g
 Working temperature: -10℃-55℃



HS668

Product material: TPE+ABS
 Microphone sensitivity: -42±3dB
 Frequency range: 20Hz-20kHz
 Product resistance: 16Ω Speaker size: 10mm
 Plug interface: Lightning plug and play
 Product line length: 125cm
 Product weight: 11.2g
 Working temperature: -10℃-55℃

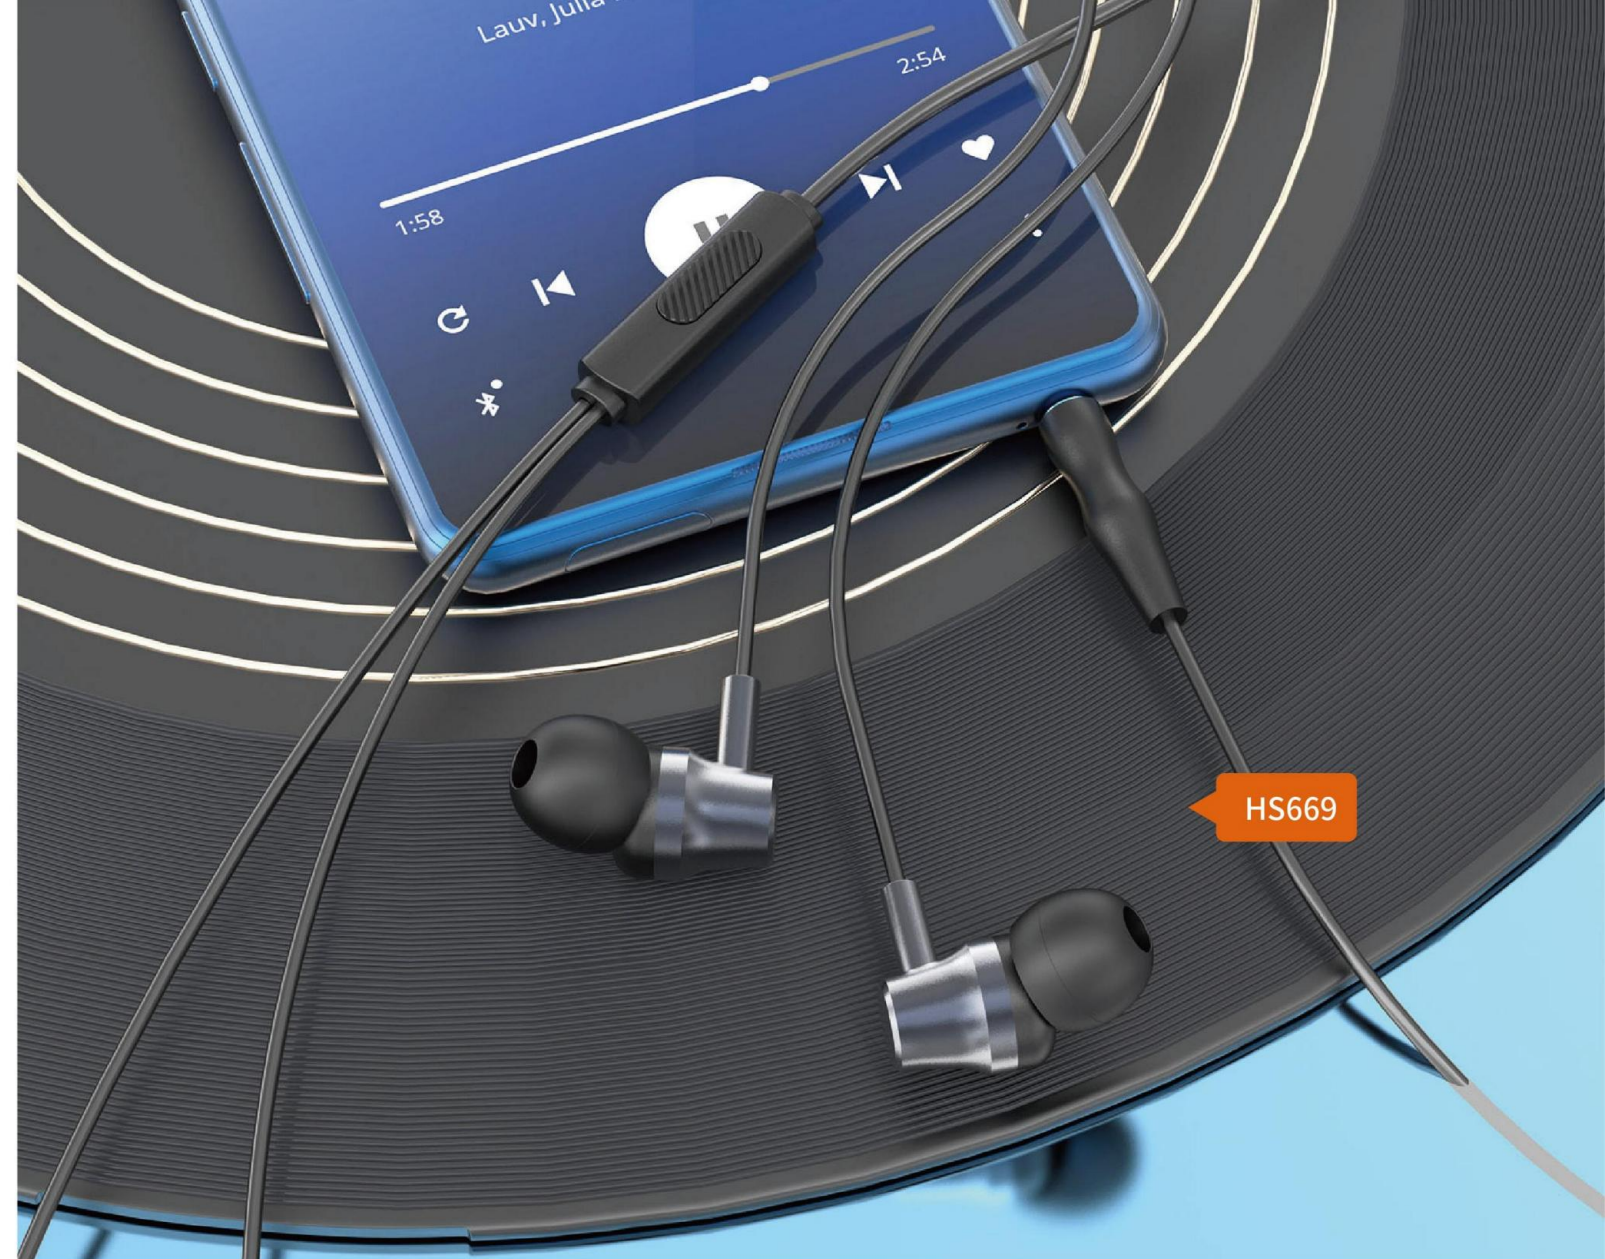

HS669



HS669

Product material: TPE+ABS
 Product material: ABS+TPE+aluminum alloy
 Microphone sensitivity: -42±3dB
 Frequency range: 20Hz-20kHz
 Product resistance: 16Ω±15% Speaker size: Φ14.2mm
 Plug interface: 3.5mm Product line length: 120cm
 Product weight: 13.8g
 Working temperature: -10℃-55℃



HS682

Product material: TPE+ABS
 Product material: ABS+Aluminum Alloy+TPE
 Microphone sensitivity: -42±3dB
 Frequency range: 20Hz-20kHz
 Product resistance: 32Ω Speaker size: 14.2mm
 Plug interface: Type-C Product line length: 120cm
 Product weight: 15.3g
 Working temperature: -10℃-55℃





New



HS670

Product material: TPE flat wire + aluminum alloy
Microphone sensitivity: $-42\pm 3\text{dB}$
Frequency range: 20Hz–20kHz
Product resistance: 32 Ω Speaker size: 13mm
Plug interface: DC 3.5
Product line length: 120cm
Product weight: 17g Color: White/Grey/Green
Operating temperature: 0°C–45°C



New



HS673

Product material: TPE flat wire + aluminum alloy
Microphone sensitivity: $-42\pm 3\text{dB}$
Frequency range: 20Hz–20kHz
Product resistance: 32 Ω Speaker size: 14.2mm
Plug interface: DC 3.5mm
Product line length: 120cm
Product weight: 16.4g Color: White/Grey/Green
Operating temperature: 0°C–45°C



New



HS671

Product material: TPE flat wire + aluminum alloy
Microphone sensitivity: $-42\pm 3\text{dB}$
Frequency range: 20Hz–20kHz
Product resistance: 32 Ω Speaker size: 13mm
Plug interface: IP
Product line length: 120cm
Product weight: 16.8g Color: White/Grey/Green
Operating temperature: 0°C–45°C



New



HS674

Product material: TPE flat wire + aluminum alloy
Microphone sensitivity: $-42\pm 3\text{dB}$
Frequency range: 20Hz–20kHz
Product resistance: 32 Ω Speaker size: 14.2mm
Plug interface: DC 3.5mm
Product line length: 120cm
Product weight: 16.6g Color: White/Grey/Green
Operating temperature: 0°C–45°C



New



HS672

Product material: TPE flat wire + aluminum alloy
Microphone sensitivity: $-42\pm 3\text{dB}$
Frequency range: 20Hz–20kHz
Product resistance: 32 Ω Speaker size: 13mm
Plug interface: Type-C
Product line length: 120cm
Product weight: 17.4g Color: White/Grey/Green
Operating temperature: 0°C–45°C



New



HS675

Product material: TPE flat wire + aluminum alloy
Microphone sensitivity: $-42\pm 3\text{dB}$
Frequency range: 20Hz–20kHz
Product resistance: 32 Ω Speaker size: 14.2mm
Plug interface: DC 3.5mm
Product line length: 120cm
Product weight: 16.6g Color: White/Grey/Green
Operating temperature: 0°C–45°C





HS678



HS680



New

HS676

Product material: Braided wire + aluminum alloy
Microphone sensitivity: $-42\pm 3\text{dB}$
Frequency range: 20Hz–20kHz
Product resistance: 16Ω Speaker size: 6mm
Plug interface: DC 3.5mm
Product line length: 120cm
Product weight: 14.0g Color: Black/White
Operating temperature: $0^{\circ}\text{C} - 45^{\circ}\text{C}$



New

HS679

Product material: Braided wire + aluminum alloy
Microphone sensitivity: $-42\pm 3\text{dB}$
Frequency range: 20Hz–20kHz
Product resistance: 16Ω Speaker size: 6mm
Plug interface: DC 3.5mm
Product line length: 120cm
Product weight: 14.0g Color: Black/White
Operating temperature: $0^{\circ}\text{C} - 45^{\circ}\text{C}$



New

HS677

Product material: Braided wire + aluminum alloy
Microphone sensitivity: $-42\pm 3\text{dB}$
Frequency range: 20Hz–20kHz
Product resistance: 16Ω Speaker size: 6mm
Plug interface: Type-C
Product line length: 120cm
Product weight: 14.3g Color: Black/White
Operating temperature: $0^{\circ}\text{C} - 45^{\circ}\text{C}$



New

HS680

Product material: Braided wire + aluminum alloy
Microphone sensitivity: $-42\pm 3\text{dB}$
Frequency range: 20Hz–20kHz
Product resistance: 16Ω Speaker size: 6mm
Plug interface: Type-C
Product line length: 120cm
Product weight: 14.3g Color: Black/White
Operating temperature: $0^{\circ}\text{C} - 45^{\circ}\text{C}$



New

HS678

Product material: Braided wire + aluminum alloy
Microphone sensitivity: $-42\pm 3\text{dB}$
Frequency range: 20Hz–20kHz
Product resistance: 16Ω Speaker size: 6mm
Plug interface: iS
Product line length: 120cm
Product weight: 14.3g Color: Black/White
Operating temperature: $0^{\circ}\text{C} - 45^{\circ}\text{C}$



New

HS681

Product material: Braided wire + aluminum alloy
Microphone sensitivity: $-42\pm 3\text{dB}$
Frequency range: 20Hz–20kHz
Product resistance: 16Ω Speaker size: 6mm
Plug interface: iS
Product line length: 120cm
Product weight: 14.3g Color: Black/White
Operating temperature: $0^{\circ}\text{C} - 45^{\circ}\text{C}$



POWER BANK



PB747

Capacity: 10000mAh
 Battery Type: Polymer core
 Input: Micro: 5V / 2.4A 12W MAX
 Type-C: 5V / 2.4A 12W MAX
 Output: USB1 / 2: 5V / 2.4A 12W MAX
 Size: 140 X 68 X 16mm
 Material: ABS
 Color: White

10000mAh



PB759

Capacity: 10000mAh
 Battery Type: Polymer core
 Input: Micro: 5V / 2A 10W MAX
 Type-C: 5V / 2A 10W MAX
 Output: USB-A1-2: 5V / 2.1A
 Size: 67.8 X 140 X 15.7mm
 Material: ABS+Polymer batteries
 Weight: 221.5g Color: White

10000mAh




PB760

Capacity: 10000mAh
 Battery Type: Polymer core
 Input: Micro: 5V / 2.4A, 9V / 2A
 Type-C: 5V / 2.4A, 9V / 2A, 18W PD
 Output: USB1: 5V / 3A, 9V / 2A, 12V / 1.5A
 Type-C: 5V / 3A, 9V / 2A, 12V / 3A, 15V / 1.5A, 18W PD
 Size: 66.5 X 139 X 15.8mm
 Weight: 220.5g
 Material: ABS Color: White

10000mAh

PD 18W



PB766

Capacity: 20000mAh
 Rated capacity: 12500mAh
 Battery Type: Polymer core
 Micro-USB input: DC 5V/2A
 Type-C input: DC 5V/2A
 USB1 output: DC 5V/2.1A
 USB2 output: DC 5V/2.1A
 Size: 67 X 139.5 X 28mm Weight: 407.1g
 Material: ABS Color: white

20000mAh



PB758

Capacity: 10000mAh
 Battery Type: ABS+Polymer batteries
 Input: Micro: 5V / 2A
 USB: 5V / 2A
 Output: Micro: 5V/2A Type-C: 5V/2A
 Lighting: 5V/2A
 Size: 67.5 X 150 X 40mm
 Material: ABS
 Weight: 238g Color: White

10000mAh





PB765

Capacity: 10000mAh Rated capacity: 6200mAh
Battery Type: Polymer core
Type-C input: DC 5V/3A, 9V/2A, 18W(Max)
Type-C output: DC 5V/3A, 9V/2.23A, 12V/1.67A, 20W
USB output: DC 5V/4.5A, 4.5V/5A, 5V/3A, 9V/2A, 12V/1.5A, 22.5W
Lightning output: DC 5V/2A, 9V/2A, 18W(Max)
Wireless charging: 15W/10W/7.5W/5W
Size: 68 X 148 X 17.3mm Weight: 239.8g
Material: PC flame retardant + rubber oil Color: white

10000mAh **PD 20W** **22.5W** **15W**



PD 20W

22.5W



PB764

Capacity: 30000mAh/3.7V 111Wh Rated capacity: 18000mAh
Battery Type: Polymer core Material: PS+ABS
Micro input: DC 5V/3A, 9V/2A, 12V/1.5A(18W)
Type-C input: DC 5V/3A, 9V/2A, 12V/1.5A(18W)
USB1 output: DC 4.5V/5A, 5V/4.5A, 9V/2A, 12V/1.5A(22.5W)
USB2 output: DC 4.5V/5A, 5V/4.5A, 9V/2A, 12V/1.5A(22.5W)
Type-C output: DC 5V/3A, 9V/2.2A, 12V/1.67A(20W)
USB1+USB2 total output: DC 5V/3A Color: white
Product size: 70.7*153.5*40.5 mm Product weight: 606g

30000mAh **PD 20W** **22.5W**



PD 20W

22.5W



PB767

Model: PB767 Capacity: 10000mAh/37Wh
Rated capacity: 6300mAh Cell type: polymer
Shell material: PC flame retardant
Type-C input: DC 5V/3A, 9V/2A, 18W(Max)
Micro input: DC 5V/3A, 9V/2A, 12V/1.5A, 18W(Max)
Type-C output: DC 5V/3A, 9V/2.23A, 12V/1.67A, 20W(Max)
USB output: DC 5V/4.5A, 4.5V/5A, 5V/3A, 9V/2A, 12V/1.5A, 22.5W(Max)
Size: 68 X 140 X 16mm Weight: 223.8g
Color: white

10000mAh **22.5W** **PD 20W**



PD 20W

22.5W



PB768

Model: PB768 Capacity: 20000mAh/74Wh
Rated capacity: 12600mAh Cell type: polymer
Shell material: PC flame retardant
Type-C input: DC 5V/3A, 9V/2A, 18W(Max)
Micro input: DC 5V/3A, 9V/2A, 12V/1.5A, 18W(Max)
Type-C output: DC 5V/3A, 9V/2.23A, 12V/1.67A, 20W(Max)
USB output: DC 5V/4.5A, 4.5V/5A, 5V/3A, 9V/2A, 12V/1.5A, 22.5W(Max)
Size: 68 X 140 X 28mm Weight: 403.8g
Color: white

20000mAh **22.5W** **PD 20W**



PD 20W

22.5W

QC 3.0



PB769

Model: PB769 Capacity: 10000mAh/37Wh
Rated capacity: 6300mAh Cell type: polymer
Shell material: PC flame retardant
Type-C input: DC 5V/3A, 9V/2A, 18W(Max)
Type-C output: DC 5V/3A, 9V/2.23A, 12V/1.67A, 20W(Max)
USB output: DC 5V/4.5A, 4.5V/5A, 5V/3A, 9V/2A, 12V/1.5A, 22.5W(Max)
Size: 68 X 143 X 17mm Weight: 235g
Color: white

10000mAh **22.5W** **PD 20W** **QC 3.0**





PB771

VIDVIE Designed by VIDVIE
Hongkong Branch

10W
-CHARGING-

88% Charged

PB771

Capacity: 10000mAh/37Wh
Rated capacity: 6300mAh Cell type: polymer
Shell material: ABS+PC flame retardant
Type-C input: DC 5V/2A Micro input: DC 5V/2A
USB1/USB2 output: DC 5V/2A
Product size: 68 * 137 * 15.5mm
Product weight: 223.5g
Working temperature: -10 °C-50 °C

10000mAh 2A



PB772

Capacity: 10000mAh/37Wh
Rated capacity: 6300mAh Cell type: polymer
Shell material: ABS+PC flame retardant
Type-C input: DC 5V/2A Micro input: DC 5V/2A
USB1/USB2 output: DC 5V/2A
Product size: 68*140*16.5mm
Product weight: 218g
Working temperature: -10 °C-50 °C

10000mAh 2A



22.5W



PB776

Capacity: 10000mAh/37Wh Rated capacity: 5800mAh
Cell Type: Polymer Shell material: ABS+PC flame retardant
Type-C Input: DC 5V/3A, 9V/2A USB output: DC 4.5V/5A, 5V/4.5A
5V/3A, 9V/2A, 12V/1.5A (22.5W) Type-C output: DC 4.5V/5A, 5V/4.5A
5V/3A, 9V/2A, 12V/1.5A (22.5W) Lightning output: DC 5V/2.4A,
9V/2.23A Multi-port simultaneous total output: DC 5V/3A
Product size: 89.5*25.6*58.6mm Product weight: 192g
Working temperature: -10 °C-50 °C

10000mAh 22.5W



PB779

Battery capacity: 30000mAh Rated capacity: 19500mAh
Core type: Polymer Housing material: ABS+PC
Micro input: DC 5V/2A Type-C input: DC 5V/2A
USB1 output: DC 5V/2.1A USB2 output: DC 5V/2.1A
USB1+USB2 total output: DC 5V/2.1A Max
Product size: 68.3*146*41mm Product weight: 602g
Color: White Working temperature: -10 °C-50 °C

30000mAh 2.1A



PB773

Capacity: 10000mAh/37Wh
Rated capacity: 6300mAh Cell type: polymer
Shell material: ABS+PC flame retardant
Type-C input: DC 5V/2A Micro input: DC 5V/2A
USB1/USB2 output: DC 5V/2A
Product size: 68 * 137 * 15.5mm
Product weight: 222.5g
Working temperature: -10 °C-50 °C

10000mAh 2A



PB775

Capacity: 20000mAh/74Wh
Rated capacity: 12600mAh
Cell type: polymer
Shell material: ABS+PC flame retardant
Type-C input: DC 5V/2.1A
USB1/USB2 output: DC 5V/2.1A
Product size: 70.4*149.1*28.5mm
Product weight: 428g
Working temperature: -10 °C-50 °C

20000mAh





PD
100w
22.5W
3A



PB777

Battery: 21700 lithium battery * 4 Capacity: 20000mAh/74Wh
 Rated capacity: 12000mAh Material: fireproof ABS+PC
 Type-C output: DC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A (100W)
 USB output: DC 4.5V/5A, 5V/4.5A, 5V/3A, 9V/2A, 12V/1.5A (22.5W)
 Type-C input: DC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W)
 USB-C+USB-A output: DC 5V/3A 15W
 Compatible with fast charging protocols: PD 2.0/3.0, PPS, QC2.0/3.0, AFC, FCP, SCP, VOOC, BC1.2, DCP
 Wired maximum power: PD 100W
 Product size: 166*53*45mm Product weight: 432.3g
 Working temperature: -10 °C-50 °C

20000mAh 100W 22.5W 3A



PD
100w
22.5W
3A



PB778

Battery: 21700 lithium battery * 8 Capacity: 40000mAh/148Wh
 Rated capacity: 21600mAh Material: fireproof ABS+PC
 Type-C output: DC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A (100W)
 USB output: DC 4.5V/5A, 5V/4.5A, 5V/3A, 9V/2A, 12V/1.5A (22.5W)
 Type-C input: DC 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A (65W)
 USB-C+USB-A output: DC 5V/3A 15W
 Compatible with fast charging protocols: PD 2.0/3.0, PPS, QC2.0/3.0, AFC, FCP, SCP, VOOC, BC1.2, DCP
 Wired maximum power: PD 100W
 Product size: 166*54*67mm Product weight: 746.4g
 Working temperature: -10 °C-50 °C

40000mAh 100W 22.5W 3A





PB781T



PB782

New



PB781T

Capacity: 5000mAh
Rated capacity: 3000mAh
Battery type: 21700 lithium battery
Shell material: ABS+PC
Type-C input: DC 5V/2A
Type-C output: DC 5V/2.4A
Product size: 78*47.8*26.2mm
Product weight: 95.8g
Working temperature: -10°C-50°C

5000mAh



New



PB780

Battery capacity: 10000mAh/37Wh Rated capacity: 5800mAh
Core type: Polymer Housing material: ABS+PC
Type-C input: DC 12V/1.5A, 9V/2A, 5V/2.6A 18W
Type-C Output: DC 12V/1.66A, 9V/2.22A, 5V/3A 20W
Wireless charging output: 5W/7.5W/10W/15W
Product size: 67*106*19mm
Product weight: 210.8g
Color: Dark Gray
Working temperature: -10 °C-50 °C

10000mAh 20W 3A



New



PB781i

Capacity: 5000mAh
Rated capacity: 3000mAh
Battery type: 21700 lithium battery
Shell material: ABS+PC
Type-C input: DC 5V/2A
Lightning output: DC 5V/2.4A
Product size: 78*47.8*26.2mm
Product weight: 94.7g
Working temperature: -10°C-50°C

5000mAh



New



PB782

Capacity: 10000mAh
Rated capacity: 6300mAh
Cell Type: Polymer
Shell material: aluminum alloy
Micro input: DC 5V/2A Type-C output: DC 5V/2A
USB1 output: DC 5V/2.1A USB2 output: DC 5V/2.1A
Product size: 139*67*14.7mm
Product weight: 250g
Working temperature: -10°C-50°C

10000mAh 2.1A





New

PB783

Capacity: 10000mAh
 Rated capacity: 6000mAh Cell Type: Polymer
 Shell material: fireproof ABS+PC+liquid silicone
 Type-C input: DC 5V/3A, 9V/2.22A, 12V/1.67A
 Type-C output: DC 5V/3A, 9V/2A, 12V/1.5A
 Wired maximum power: PD 20W
 Wireless maximum power: 15W
 Product size: 99*67*20mm Product weight: 202g
 Working temperature: -10°C-50°C

10000mAh PD 20W



New

PB784

Capacity: 10000mAh/37Wh Rated capacity: 6300mAh
 Battery type: lithium polymer Shell material: ABS+PC
 Type-C input: 5V/3A, 9V/2A, 12V/1.5A(18W)
 USB output: 5V/3A, 9V/2A, 12V/1.5A(18W)
 Type-C output: 5V/3A, 9V/2.23A, 12V/1.67A(20W)
 Watch wireless charging: 2.5W
 Product size: 103*50*26mm
 Product weight: 179g
 Working temperature: -10°C-50°C

10000mAh



New

PB785

Capacity: 10000mAh/38.5Wh Rated capacity: 6300mAh(5V/2A)
 Battery type: polymer Shell material: ABS+PC
 Lightning input: 5V/2A, 9V/2A, 12V/1.5A, 18W
 Type-C input: 5V/2.5A, 9V/2A, 12V/1.5A, 18W
 Type-C output: 5V/3.1A, 9V/2.23A, 12V/1.67A, 20W
 PPS: 3-11V/2A 22W
 USB输出: 5V/4.5A, 5V/3A, 9V/2A, 12V/1.5A, 22.5W
 Product size: 78*47.8*26.2mm Product weight: 95.8g
 Working temperature: -10°C-50°C

10000mAh PD 20W



New

PB786

Capacity: 10000mAh Rated capacity: 6300mAh
 Cell Type: Polymer Shell material: Aluminum alloy + PC
 Type-C input: 5V/2.5A, 9V/2A, 12V/1.5A, 18W
 Type-C output: 5V/3.1A, 9V/2.23A, 12V/1.67A, 20W
 PPS: 3-11V/2A, 22W
 USB output: 5V/4.5A, 5V/3A, 9V/2A, 12V/1.5A, 22.5W
 Product size: 66.5*57.7*22.7mm
 Product weight: 173.8g
 Working temperature: -10°C-50°C

10000mAh PD 20W





PB787



PB789



PB787

Capacity: 10000mAh/37Wh
Rated capacity: 6300mAh(5V/2A) Cell Type: Li-polymer
Shell material: aluminum
Type-C input: DC 5V=2.4A, 9V=2.0A (18W)
Type-C output: DC 5V=2.4A, 9V=2.22A, 12V=1.67A (20W)
Product size: 125.5*62.2*11.2mm Product weight: 177.3g
Working temperature: -10°C-50°C

10000mAh PD 20W



PB788

Capacity: 20000mAh/74Wh Rated capacity: 13000mAh(5V/2A)
Battery type: Li-polymer Shell material: aluminum
Type-C input: DC 5V=2.4A, 9V=2.0A, 12V=1.5 (18W)
USB output: DC 5V=2.4A, 9V=2.0A, 12V=1.5A, 4.5V=5.0A, 5V=4.5A (22.5W)
Type-C output: DC 5V=2.4A, 9V=2.22A, 12V=1.67A (20W)
Product size: 128*63.9*22.3mm
Product weight: 314.1g
Working temperature: -10°C-50°C

20000mAh PD 20W



PB789

Capacity: 5000mAh/18.25Wh Rated capacity: 3000mAh(5V/2A)
Battery type: lithium polymer Shell material: aluminum+PC
Type-C input: DC 5V=2.4A, 9V=2.0A (18W)
Type-C output: DC 5V=2.4A, 9V=2.22A, 12V=1.67A (20W)
Wireless output: 15W
Product size: 103*65*10mm Product weight: 124.5g
Working temperature: -10°C-50°C

5000mAh PD 20W



PB790

Capacity: 10000mAh/37Wh Rated capacity: 6300mAh(5V/2A)
Cell Type: lithium polymer Shell material: Metal+PC
Type-C input: DC 5V=2.4A, 9V=2.0A (18W)
Type-C output: DC 5V=2.4A, 9V=2.22A, 12V=1.67A (20W)
Wireless output: 15W
Product size: 104*67*15.5mm
Product weight: 197g
Working temperature: -10°C-50°C

10000mAh PD 20W



New

PB791-L

Capacity: 5000mAh/18.25Wh
Rated capacity: 3000mAh(5V/2A)
Shell material: Fireproof ABS+PC
Type-C input: 5V=2.4A, 9V=2A, 12V=1.5A (18W)
For iP output: 5V=2.4A, 9V=2.22A, 12V=1.67A (20W)
Product size: 81*35*28mm
Product weight: 100g
Working temperature: -10 °C-50 °C

50000mAh 20W



New

PB791-T

Capacity: 5000mAh/18.25Wh
Rated capacity: 3000mAh(5V/2A)
Shell material: Fireproof ABS+PC
Type-C input: 5V=2.4A, 9V=2A, 12V=1.5A (18W)
For iP output: 5V=2.4A, 9V=2.22A, 12V=1.67A (20W)
Product size: 81*35*28mm
Product weight: 100g
Working temperature: -10 °C-50 °C

50000mAh 20W



New

PB792

Battery capacity: 10000mAh/37Wh
Rated capacity: 6300mAh(5V/2A)
Core type: Polymer
Housing material: Fireproof ABS+PC+zinc alloy bracket
Type-C output: 5V=3A, 9V=2.22A, 12V=1.67A, (20W)
Type-C input: 5V=2.4A, 9V=2A, 12V=1.5A
Wired maximum power: PD20W
Wireless maximum power: 15W
Product size: 111*72*19.5mm Product weight: 230.5g
Working temperature: -10 °C-50 °C

10000mAh



New

PB793

Capacity: 10000mAh/37Wh
Rated capacity: 6300mAh(5V/2A) Material: ABS+PC
Type-C output: 5V=2A, 9V=2A, 12V=1.5A 18W(Max)
USB output: 4.5V=5A, 5V=4.5A, 5V=3A, 9V=2A, 12V=1.5A 22.5W(Max)
Type-C comes with line input: 4.5V=5A, 5V=4.5A, 5V=3A, 9V=2A, 12V=1.5A 22.5W(Max)
iPH comes with line output: 5V=3A, 9V=2.22A, 12V=1.67A 20W(Max)
Total output: 5V=3A(Max)
Product size: 104.5*63.8*27.6mm Product weight: 247.6g
Working temperature: -10 °C-50 °C

10000mAh 22.5W



New

PB794

Capacity: 20000mAh/73.85V/77Wh
Rated capacity: 12600mAh(5V/2A) Material: ABS+PC
Type-C output: 5V=2A, 9V=2A, 12V=1.5A 18W(Max)
USB output: 4.5V=5A, 5V=4.5A, 5V=3A, 9V=2A, 12V=1.5A 22.5W(Max)
Type-C comes with line input: 4.5V=5A, 5V=4.5A, 5V=3A, 9V=2A, 12V=1.5A 22.5W(Max)
iPH comes with line output: 5V=3A, 9V=2.22A, 12V=1.67A 20W(Max)
Total output: 5V=3A(Max)
Product size: 111.6*69.5*33.6mm Product weight: 335g
Working temperature: -10 °C-50 °C

20000mAh 22.5W



PB798

New

PB796

Battery capacity: 10000mAh/37Wh
Rated capacity: 6000mAh(5V/2A)
Battery material: polymer lithium battery
AC Input: 110-240V 50-60Hz (18W)
Type-C Input: 5V=3A, 9V=2A, (18W)
USB-A Output: 5V=3A, 9V=2A, 10V=2.25A, 12V=1.5A, (22.5W)
Type-C Output: 5V=3A, 9V=2.22A, 12V=1.67A, (20W)
Type-C comes with cable output: 5V=3A, 9V=2.22A, 12V=1.67A, (20W) iP comes with cable Output: 5V=2.4A
Product Size: 120*60*30mm product weight: 254.69g
Operating temperature: -10 °C-50 °C

10000mAh



New

PB798

Battery capacity: 20000mAh
Rated capacity: 12000mAh(5V/2A)
Type-C input/output: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A(65W MAX)
USB output: 5V=3A, 9V=3A, 10V=2.25A, 12V=3A, 15V=3A, 20V=3A(60W MAX)
Type-C comes with cable input/output: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3A(60W MAX) iP comes with cable output: 5V=2.4A
Product Size: 110*52.5*49.5mm product weight: 375g
Operating temperature: -10 °C-50 °C

20000mAh





PB7002



PB7003

27000mAh



New

PB799

Capacity: 5000mAh/18.25Wh
Rated capacity: 3000mAh (5V/2A) Material: PC+ABS
Type-C input: 5V=3A, 9V=2A, 18W
Wireless charging output: 5W/7.5W/10W/15W
Type-C output: 5V=3A, 9V=2.22A, 12V=1.67A 20W (Max)
Product size: 76.5*64.5*16.1mm Product weight: 120.37g
Operating temperature: -10°C-50 °C

5000mAh 20W



New

PB7001

Capacity: 10000mAh/37Wh
Rated capacity: 6000mAh(5V/2A) Material: PC+ABS
Type-C input: 5V=3A, 9V=2A, 18W
Wireless charging output: 5W/7.5W/10W/15W
Type-C output: 5V=3A, 9V=2.22A, 12V=1.67A 20W (Max)
Product size: 76.5*64.5*26.4mm Product weight: 195.77g
Operating temperature: -10°C-50 °C

10000mAh 20W



New

PB7002

Battery capacity: 10000mAh/37Wh
Rated capacity: 6300mAh(5V/2A) Core type: Polymer
Housing material: Fireproof ABS+PC+ zinc alloy bracket
Type-C output: 5V=3A, 9V=2.22A, 12V=1.67A, (20W)
Type-C line output: 5V=3A, 9V=2.22A, 12V=1.67A, (20W)
Type-C input: 5V=2.4A, 9V=2A, 12V=1.5A
Wired maximum power: PD20W
Wireless maximum power: 15W
Product size: 111*72*19.5mm Product weight: 232.3g
Working temperature: -10 °C-50 °C

10000mAh



New

PB7003

Battery capacity: 27000mAh/3.6V/97.2Wh
Rated capacity: 16500mAh (5V/2A)
Type-C1/Type-C2 input: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=5A(100W MAX)
USB output: 5V=3A, 9V=3A, 10V=2.25A, 12V=3A, 15V=3A, 20V=3A (60W MAX)
Type-C1+USB output: 100W+45W Type-C2+USB output: 5V=3A
Type-C1+Type-C2 output: 100W+45W
Product Size: 152*54*48mm product weight: 560g
Operating temperature: -10 °C-50 °C

27000mAh



New

PB7004

Battery capacity: 10000mAh/37Wh
Rated capacity: 6000mAh(5V/2A) Material: Fireproof ABS+PC
Type-C input: 5V=2A, 9V=2A, 12V=1.5A
USB output: 4.5V=5A, 5V=4.5A, 5V=3A, 9V=2A, 12V=1.5A (22.5W)
Type-C comes with cable input: 5V=2.4A, 9V=2A, 12V=1.5A
Type-C comes with cable output: 5V=3A, 9V=2.22A, 12V=1.67A(20W)
IP comes with cable Output: 5V=2.4A, 9V=2.22A, 12V=1.67A(20W)
Wired maximum power: PD20W Wireless maximum power: 15W
Product Size: 113*72*22mm product weight: 224.2g
Operating temperature: -10 °C-50 °C

10000mAh



New

PB7005

Battery capacity: 20000mAh/74Wh
Rated capacity: 12000mAh(5V/2A) Material: Fireproof ABS+PC
Type-C input: 5V=2A, 9V=2A, 12V=1.5A
USB output: 4.5V=5A, 5V=4.5A, 5V=3A, 9V=2A, 12V=1.5A (22.5W)
Type-C comes with cable input: 5V=2.4A, 9V=2A, 12V=1.5A
Type-C comes with cable output: 5V=3A, 9V=2.22A, 12V=1.67A(20W)
IP comes with cable Output: 5V=2.4A, 9V=2.22A, 12V=1.67A(20W)
Wired maximum power: PD20W Wireless maximum power: 15W
Product Size: 129*73*30mm product weight: 379.4g
Operating temperature: -10 °C-50 °C

20000mAh





PB7006



PB7007



PB7009



PB7011



New

PB7006

Capacity: 10000mAh/38.5Wh
Rated capacity: 5800mAh Material: ABS+PC
Type-C1/C2 input: 5V=3A, 9V=2A (18W MAX)
Type-C1/C2 output: 5V=3A, 9V=2.22A, 12V=1.67A (20W MAX)
Phone wireless output: 15W/10W/7.5W/5W
Headphone wireless output: 3W
IP watch wireless output: 2.5W
Product size: 74.11*117.55*21.5mm Product weight: 179g
Operating temperature: -10°C-50 °C

10000mAh 20W



New

PB7009

Cell type: Lithium polymer battery
Capacity: 10000mAh (3.85V/38.5Wh)
Rated capacity: 5800mAh (5V=3A) Material: ABS+PC
Input with A cable: 5V=2A, 9V=2A, 12V=1.5A (18W)
Type-C input: 5V=2.5A, 9V=2A, 12V=1.5A (18W)
Type-C output: 5V=2.4A, 5V=3A, 9V=2.22A, 12V=1.67A (20W)
USB-A output: 5V=4.5A, 5V=3A, 9V=2A, 12V=1.5A (22.5W)
Type-C comes with cable output: 5V=4.5A, 5V=3A, 9V=2A, 12V=1.5A (22.5W) IP comes with cable output: 5V=2.4A
Total output: 5V=3A Product size: 109mm*67.5mm*20.5mm
Product weight: 188.5g Operating temperature: -10 °C-50 °C

10000mAh



New

PB7007

Capacity: 5000mAh (3.85V/19.25Wh)
Rated capacity: 2800mAh (5V=3A)
Material: lithium polymer battery
Type-C input: 5V=3A, 9V=2A Type-C output: 5V=3A, 9V=2.22A, 12V=1.67A Wireless output: 5W/7.5W/10W/15W
Total output: 5V=3A Energy conversion rate: ≥65%
Product size: 99.5*65.7*9.7mm Product weight: 123.6g
Operating temperature: -10°C-50 °C

5000mAh 15W



New

PB7010

Cell type: Lithium polymer battery
Capacity: 20000mAh (3.85V/77Wh)
Rated capacity: 11600mAh (5V=3A) Material: ABS+PC
Input with A cable: 5V=2A, 9V=2A, 12V=1.5A (18W)
Type-C input: 5V=2.5A, 9V=2A, 12V=1.5A (18W)
Type-C output: 5V=2.4A, 5V=3A, 9V=2.22A, 12V=1.67A (20W)
USB-A output: 5V=4.5A, 5V=3A, 9V=2A, 12V=1.5A (22.5W)
Type-C comes with cable output: 5V=4.5A, 5V=3A, 9V=2A, 12V=1.5A (22.5W) IP comes with cable output: 5V=2.4A
Total output: 5V=3A Product size: 109mm*67.5mm*34.5mm
Product weight: 327.1g Operating temperature: -10 °C-50 °C

20000mAh



New

PB7008

Capacity: 10000mAh (3.85V/38.5Wh)
Rated capacity: 5800mAh (5V=3A)
Material: lithium polymer battery
Type-C input: 5V=3A, 9V=2A Type-C output: 5V=3A, 9V=2.22A, 12V=1.67A Wireless output: 5W/7.5W/10W/15W
Total output: 5V=3A Energy conversion rate: ≥70%
Product size: 105*65.7*15.2mm Product weight: 196.3g
Operating temperature: -10°C-50 °C

10000mAh 15W



New

PB7011

Cell type: Lithium polymer battery
Capacity: 10000mAh (3.7V/37Wh)
Rated capacity: 5200mAh (5V=3A) Material: ABS+PC
Type-C input: 5V=2.9A, 9V=2A, 12V=1.5A
Type-C output: 5V=2.4A, 5V=3A, 9V=2.22A, 12V=1.67A
Type-C comes with cable output: 5V=3A, 9V=2A, 12V=1.5A, 10V=2.25A IP comes with cable output: 5V=2.4A
USB-A output: 5V=3A, 9V=2A, 12V=1.5A, 10V=2.25A
Total output: 5V=3A (Max) Product size: 89*60.5*26mm
Product weight: 190g Operating temperature: -10 °C-50 °C

10000mAh





PB7012

Battery type: Lithium polymer battery
Capacity: 10000mAh (3.7V/37Wh)
Rated capacity: 5800mAh (5V=2A) Material: ABS+PC
Type-C input: 5V=2A USB-A1 output: 5V=2A
USB-A2 output: 5V=2A Total output: 5V=2A
Product size: 69.5*145*16mm Product weight: 217.5g
Operating temperature: -10 °C-50 °C

10000mAh



PB7014

Cell type: Lithium polymer battery
Capacity: 10000mAh (3.7V/37Wh)
Rated capacity: 5800mAh (5V=3A) Material: ABS+PC
Type-C input: 5V=2.8A, 9V=2A, 12V=1.5A
Type-C output: 5V=3A, 5V=2.4A, 9V=2.22A, 12V=1.67A
USB-A1 output: 5V=3A, 9V=2A, 12V=1.5A, 10V=2.25A
USB-A2 output: 5V=3A, 9V=2A, 12V=1.5A, 10V=2.25A
Total output: 5V=3A Product size: 69.5*146*16mm
Product weight: 225g Operating temperature: -10 °C-50 °C

10000mAh



PB7013

Battery type: Lithium polymer battery
Capacity: 20000mAh (3.7V/74Wh)
Rated capacity: 11600mAh (5V=2A) Material: ABS+PC
Type-C input: 5V=2A USB-A1 output: 5V=2A
USB-A2 output: 5V=2A Total output: 5V=2A
Product size: 69.5*146*28.5mm Product weight: 393.8g
Operating temperature: -10 °C-50 °C

20000mAh



PB7015

Cell type: Lithium polymer battery
Capacity: 20000mAh (3.7V/74Wh)
Rated capacity: 11600mAh (5V=3A) Material: ABS+PC
Type-C input: 5V=2.8A, 9V=2A, 12V=1.5A
Type-C output: 5V=3A, 5V=2.4A, 9V=2.22A, 12V=1.67A
USB-A1 output: 5V=3A, 9V=2A, 12V=1.5A, 10V=2.25A
USB-A2 output: 5V=3A, 9V=2A, 12V=1.5A, 10V=2.25A
Total output: 5V=3A Product size: 69.5*146*28.5mm
Product weight: 393.8g Operating temperature: -10 °C-50 °C

20000mAh





PB7017

PB7017

Cell type: Lithium polymer battery
Capacity: 10000mAh (3.7V/37Wh)
Rated capacity: 5800mAh (5V=3A) Material: ABS+PC
Type-C input: 5V=2.5A, 9V=2A, 12V=1.5A IP input: 5V=2A, 9V=2A, 12V=1.5A Type-C output: 5V=3A, 5V=2.4A, 9V=2.22A, 12V=1.67A
USB output: 12V=1.5A, 9V=2A, 5V=3A, 5V=4.5A
Type-C cable output: 12V=1.5A, 9V=2A, 5V=3A, 5V=4.5A
iP cable output: 5V=2.4A Total output: 5V=3A (Max)
Energy conversion rate: ≥70% Product size: 147*69*19.4mm
Product weight: 234.5g Operating temperature: -10 °C-50 °C

New

10000mAh



PB7018

Cell type: Lithium polymer battery
Capacity: 20000mAh (3.7V/74Wh)
Rated capacity: 11600mAh (5V=3A) Material: ABS+PC
Type-C input: 5V=2.5A, 9V=2A, 12V=1.5A IP input: 5V=2A, 9V=2A, 12V=1.5A Type-C output: 5V=3A, 5V=2.4A, 9V=2.22A, 12V=1.67A
USB output: 12V=1.5A, 9V=2A, 5V=3A, 5V=4.5A
Type-C cable output: 12V=1.5A, 9V=2A, 5V=3A, 5V=4.5A
iP cable output: 5V=2.4A Total output: 5V=3A (Max)
Energy conversion rate: ≥70% Product size: 147*69*39mm
Product weight: 422.5g Operating temperature: -10 °C-50 °C

New

20000mAh



PB7019

PB7019


Capacity: 10000mAh (3.85V/38.5Wh)
Rated capacity: 5800mAh (5V=3A)
Cell type: lithium polymer battery Casing material: ABS+PC
Type-C input: 5V=2.5A, 9V=2A, 12V=1.5A
Type-C output: 5V=3A, 9V=2.22A, 12V=1.67A(20W Max)
Type-C cable output: 5V=4.5A, 5V=3A, 9V=2A, 12V=1.5A
Total output (Type-C+Type-C line): 5V=3A
Energy conversion rate: ≥70% Product size: 71*66*25mm
Product weight: 171g Working temperature: -10 °C-50 °C

New

10000mAh



DATA CABLE

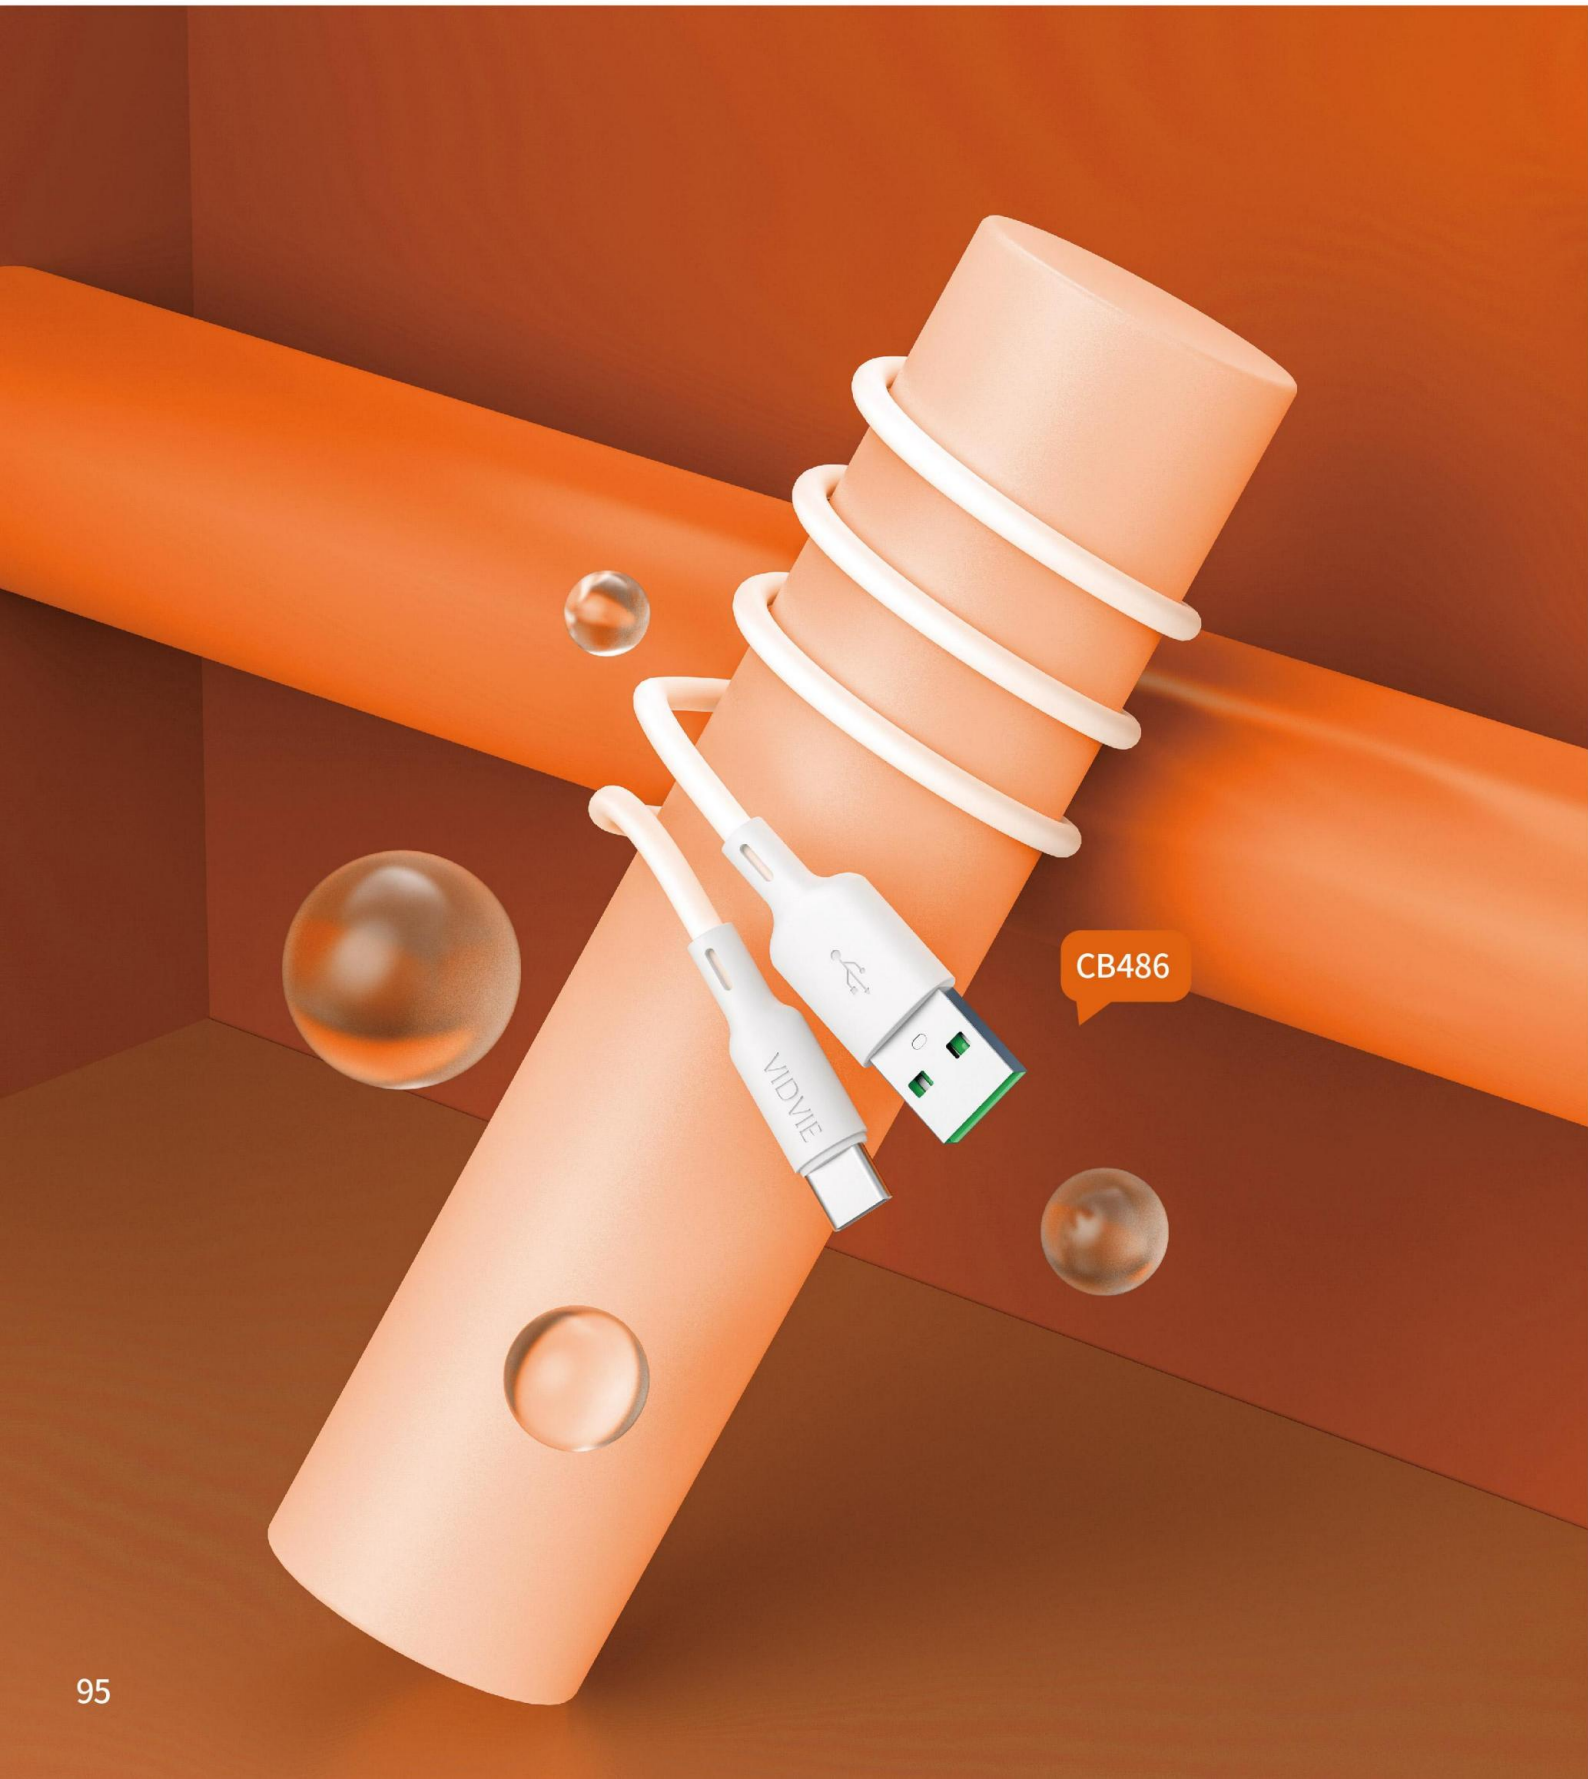

CB486

HOT



AL1105

Function: audio cable
Connector material: pure copper and gold-plated plug
Core: 36 enameled copper wires
Product form: 3.5mm male to 3.5mm male
Material: TPE
Length: 150cm
Weight: 30.78g Color: Black / White



HOT



CB411

Function: Charge&Data
Material: TPE
Features: Stepped plug design, High compatibility
Core: 88 copper wires, support data transmission
Output: 2.1A(MAX)
Length: 100cm
Color: White/Black



AL1108

Function: Data transmission
Material: TPE
Core: 36 enameled copper wires
Product form: Lightning male to 3.5mm male
Interface: 3.5mm & Lightning
Length: 150cm
Weight: 34g Color: White



AL1109

Function: Data transmission
Material: TPE
Core: 36 enameled copper wires
Product form: Type-C male to 3.5mm male
Interface: 3.5mm & Type-C
Length: 150cm
Weight: 32g Color: White



AL1110

Function: Data transmission
Material: aluminum shell + braided wire
Interface: 3.5mm & 3.5mm
Length: 180cm
Weight: 19.7g
Color: black



New







AL1111

Function: Data transmission
Material: aluminum shell + braided wire
Interface: 3.5mm & Type-C
Length: 180cm
Weight: 20g
Color: black







AL1112

Function: Data transmission
Material: aluminum shell + braided wire
Interface: 3.5mm & Lightning
Length: 180cm
Weight: 19.8g
Color: black







AL1113

Function: Data transmission
Material: aluminum shell + braided wire
Interface: 3.5mm & Lightning/Type-C
Length: 100cm
Weight: 27.8g
Color: Grey







AL1114

Function: Data transmission
Material: aluminum shell + braided wire
Interface: 3.5mm & 3.5mm/Lightning/Type-C
Length: 100cm
Weight: 33g
Color: Grey







AL1115

Material: aluminum alloy + braided wire
Audio interface: 3.5mm
Charging interface: Type-C
Charging power: 27W(9V/3A)
Length: 13cm
Product weight: 11.5g



support for fast charging Braided Wire Protection





AL1116

Material: aluminum alloy + braided wire
Audio interface: Type-C
Charging interface: Type-C
Charging power: 27W (9V/3A)
Length: 13cm
Product weight: 11.5g



support for fast charging Braided Wire Protection





AL1117

Material: aluminum alloy + braided wire
Audio interface: 3.5mm
Charging interface: Lightning
Charging power: 12W(5V/2.4A)
Length: 13cm
Product weight: 10.8g



support for fast charging Braided Wire Protection





AL1118

Material: aluminum alloy + braided wire
Audio interface: Lightning
Charging interface: Lightning
Charging power: 12W(5V/2.4A)
Length: 13cm
Product weight: 10.9g



support for fast charging Braided Wire Protection





AL1119

Material: aluminum alloy + braided wire
Interface: IP female connector to Type-C male socket
Charging power: 27W(9V/3A)
Length: 12cm
Product weight: 7.82g



support for fast charging Braided Wire Protection



New



AL1120

Material: Aluminum shell + braided wire
Audio interface: DC3.5mm
Charging interface: Type-C
Charging power: 60W
Length: 13cm
Weight: 11.01g



New



AL1121

Material: Aluminum shell + braided wire
Audio interface: Type-C
Charging interface: Type-C
Charging power: 60W
Length: 13cm
Weight: 11.19g



New



AL1122

Material: Aluminum shell + braided wire
Audio interface: DC3.5mm
Charging interface: IP
Charging power: 12W(5V/2.4A)
Length: 13cm
Weight: 10.8g



New



AL1123

Material: Aluminum shell + braided wire
Audio interface: IP
Charging interface: IP
Charging power: 12W(5V/2.4A)
Length: 13cm
Weight: 10.98g



New



AL1124

Material: Aluminum shell + braided wire
Audio interface: DC 3.5mm female to Type-C male
Length: 13cm
Weight: 6.87g



New



AL1125

Material: Aluminum shell + braided wire
Audio interface: DC 3.5mm female to iP male
Length: 13cm
Weight: 6.84g



New



AL1126

Material: Aluminum alloy + silicone
Audio interface: Type-C female to iP male
Output: PD 27W
Weight: 3.89g



New



AL1127

Material: Aluminum alloy + silicone
Audio interface: iP female to Type-C male
Output: PD 27W
Weight: 3.74g



New



AL1128

Material: aluminum alloy
Audio interface: Lightning
Interface: USB 3.0 female iP male
Data transmission: 480Mbps
Product weight: 5.16g



New



AL1129

Material: aluminum alloy
Audio interface: Lightning
Interface: USB 3.0 female Type-C male
Data transmission: 480Mbps
Product weight: 4.77g





CB412

Function: Charge&Data
Material: PVC / TPE
Features: Stepped plug design, High compatibility
Core: 98 copper wires, support data transmission
Output: 2.1A(MAX)
Length: 200cm
Color: White

CB495

Function: Charge&Data
Material: TPE+ABS
Features: Stepped plug design, High compatibility
Core: 118 copper wires, support data transmission
Output: 2.4A(MAX)
Length: 120cm
Color: White

CB443 1m / 2m / 3m

Function: Charge&Data
Material: PVC
Features: Stepped plug design, High compatibility
Core: 106 copper wires, support data transmission
Output: 2.4A(MAX)
Length: 100cm Color: White
Category: Micro or Lightning or Type-C

CB491

Function: Charge&Data
Material: braided wire + aluminum alloy
Features: Stepped plug design, High compatibility
Core: 72 five-strand cores, support PD protocol
Output: 2.4A(MAX)
Length: 120cm
Color: Black

CB486

Function: Charge&Data
Material: TPE
Features: Stepped plug design, High compatibility
Core: 152 copper wires, support data transmission
Output: Lightning: 3A Micro: 5A Type-C: 5A
Length: 120cm
Color: white

CB499

Function: Charge&Data
Material: braided wire + TPE
Features: Soft braided wire, easy to carry, not easy to knot
Core: 118copper wires, support data transmission
Output: 2.4A(MAX)
Length: 120cm
Color: Black orange

CB463

Function: Charge&Data
Material: TPE
Features: Stepped plug design, High compatibility
Core: 104 five-strand cores, support PD protocol
Output: 3A(MAX)
Length: 100cm
Color: White

CB499C&i

Function: Charge&Data
Material: braided wire + TPE
Features: Soft braided wire, easy to carry, not easy to knot
Core: 118copper wires, support data transmission
Output: PD 20W
Length: 120cm
Color: Black orange



CB472

Function: Charge&Data
Material: TPE+ABS
Features: Stepped plug design, High compatibility
Core: 111 five-strand cores, support PD protocol
Output: 20V / 3A (MAX)
Length: 100cm
Color: White



CB477

Function: Charge&Data
Material: TPE
Features: Step plug design, High compatibility
Core: 152 copper wires, passing current 3A
Output: 9V / 2A(MAX)
Length: 100cm
Color: White



CB4003

Function: Charge
Material: TPE+ABS
Features: Stepped plug design, High compatibility
Core: 100 copper wires, does not support data transmission
Output: 2.4A(MAX)
Length: 120cm
Color: White



CB4010

Function: Charging & Does not support data transfer
Material: ABS+TPE
Features: Stepped plug design, High compatibility
Lightning output: 2.4A (MAX)
Micro output: 2.4A (MAX)
Type-C output: 2.4 (MAX)
Length: 120cm
Color: White/Black



CB456

Function: Charge&Data
Material: PVC
Features: Stepped plug design, High compatibility
Core: 80 0.1 copper wires, supporting data transmission
Output: 2.41A(MAX)
Length: 100cm Color: White
Category: Micro or Lightning or Type-C



2.4A

CB4016



CB4016

Material: TPE
Output: 2.4A(MAX)
Length: 100cm
Color: White



VI-C510

Function: Charge&Data
Material: PVC
Features: Stepped plug design, High compatibility
Output: 5V/3.1A(MAX)
Length: 100cm
Color: White





CB4008

Function: Charge&Data
Material: Braided wire + TPE
Features: Stepped plug design, High compatibility
Output: 2.4A(MAX)
Length: 120cm
Color: Black / White



CB4012

Material: TPE+ABS
Output: 3A(5V/3A)
Length: 120cm
Color: Black / White



CB4011C&i

Material: braided wire + ABS
Output: 9V/3A, 12V/2.5A(PD30W)
Length: 120cm/200cm
Color: White



CB4011C&C

Material: braided wire + ABS
Output: 20V/5A(100W)
Length: 120cm/200cm
Color: White



CB4013C&i

Material: TPE+ABS
Output: 9V/3A, 12V/2.5A
Length: 100cm
Color: White



CB4013C&C

Material: TPE+ABS
Output: 20V/5A(100W)
Length: 100cm
Color: White



CB4011

Material: braided wire + ABS
Output: 5V/3A (lightning & Micro)
11V/6A (Type-C)
Length: 120cm/200cm
Color: White





CB4012C&i

Material: TPE+ABS
Output: 9V/3A, 12V/2.5A
Length: 120cm
Color: Black / White



CB4012C&C

Material: TPE+ABS
Output: 20V/3A
Length: 120cm
Color: Black / White



CB4014C&i

Material: TPE
Output: 3A(MAX)
Length: 100cm
Color: Orange & White



CB4017

Material: braided wire
Output: Lightning and Micro 5V/3A
Type C: 66W (11V/6A)
Length: 120cm
Color: Black



CB4017C&i

Material: braided wire
Output: PD 30W
Length: 120cm
Color: Black



CB4019

Material: TPE
Output: 5V/2.4A
Length: 100cm
Color: Orange & White/Orange & Black



CB4019C&i

Material: TPE
Output: 3A
Length: 100cm
Color: Orange & White/Orange & Black





CB4020

Material: braided wire
Output: 5V/3A
Length: 120cm
Color: White



CB4020C&i

Material: braided wire
Power: PD 30W
Length: 120cm
Color: White



CB4023

Material: TPE
Output: 5V/3A
Length: 150cm
Color: White



CB4021

Material: Liquid silicone wire
Output: 5V/2.4A(MAX)
Length: 100cm
Color: White/Black



CB4022 Liquid Silicone Wire

Material: braided wire + aluminum shell
Output: 5V/3A
Length: 120cm
Color: Black & Blue





3A

New

CB4024

Output: 5V/3A
Material: two-color braided wire
Length: 120cm
Product weight: 32.7g
Color: White/Black

3A

New

CB4025

Output: 3A
Material: Silicone wire
Length: 120cm
Product weight: 27.2g

New

PD 30w

CB4024C&i

Output: PD 30W
Material: two-color braided wire
Length: 120cm
Product weight: 35.4g
Color: White/Black

New

PD 30w

CB4025C&i

Output: 30W
Material: Silicone wire
Length: 120cm
Product weight: 29.5g

New

PD 100w

CB4024C&C

Output: 100W (full protocol)
Material: two-color braided wire
Length: 120cm
Product weight: 39.3g
Color: White/Black

New

PD 60w

CB4025C&C

Output: 60W
Material: Silicone wire
Length: 120cm
Product weight: 29.5g



CB4027

Output: 3A(60W)
Material: two-color braided wire
Length: 120cm
Product weight: 19.3g

CB4028i

Output: 3A
Material: Silicone
Length: 120cm
Product weight: 26.6g

CB4026

Material: braided wire + aluminum shell
Type-C to Type-C Power: 100W
Type-C to Lightning Power: 10W
Type-C to Watch power: 2.5W
Length: 120cm
Product weight: 66.2g
Color: White/Black

CB4028T

Output: 66W(11V/6A)
Material: Silicone
Length: 120cm
Product weight: 26.6g

CB4028C&C

Output: 60W
Material: Silicone
Length: 120cm
Product weight: 26.6g

CB4028C&i

Output: 30W
Material: Silicone
Length: 120cm
Product weight: 26.6g



CB4028

Type-C & Type-C output: 60W
 Type-C & Lightning output: 30W
 USB & Type-C output: 12W
 USB & Lightning output: 12W
 Simultaneous use: 80W Max
 Material: aluminum alloy + silicone
 Length: 120cm
 Product weight: 54.4g





Reliable raw materials Strong and sturdy fast charging





CB4029

Type-C & Type-C output: 100W
 Type-C & Lightning output: 30W
 USB & Type-C output: 12W
 USB & Lightning output: 12W
 Simultaneous use: 104W Max
 Material: aluminum alloy + silicone
 Length: 120cm
 Product weight: 54.4g





Reliable raw materials Strong and sturdy fast charging





CB4030i

Output: 2.4A(MAX)
 Material: Silicone + aluminum shell
 Length: 120cm
 Product weight: 25g





Reliable raw materials Strong and sturdy fast charging





CB4030V

Output: 2.4A(MAX)
 Material: Silicone + aluminum shell
 Length: 120cm
 Product weight: 25g





Reliable raw materials Strong and sturdy fast charging





CB4030T

Output: 2.4A(MAX)
 Material: Silicone + aluminum shell
 Length: 120cm
 Product weight: 25g





Reliable raw materials Strong and sturdy fast charging





New

3A



CB4031i

Output: 3A
Material: PVC
Length: 100cm
Product Weight: 31.14g

Reliable raw materials

Strong and sturdy

fast charging



New

3A



CB4031V

Output: 3A
Material: PVC
Length: 100cm
Product Weight: 30.74g

Reliable raw materials

Strong and sturdy

fast charging



New

3A



CB4031T

Output: 3A
Material: PVC
Length: 100cm
Product Weight: 31.68g

Reliable raw materials

Strong and sturdy

fast charging



New

60w



CB4031C&C

Output: 60W
Material: PVC
Length: 100cm
Product Weight: 29.39g

Reliable raw materials

Strong and sturdy

fast charging



New

30w



CB4031C&i

Output: 30W
Material: PVC
Length: 100cm
Product Weight: 29.63g

Reliable raw materials

Strong and sturdy

fast charging



New

2.4A



CB4032i

Output: 2.4A
Material: Liquid silicone
Length: 100cm
Product Weight: 24.9g

Reliable raw materials

Strong and sturdy

fast charging



New

2.4A



CB4032V

Output: 2.4A
Material: Liquid silicone
Length: 100cm
Product Weight: 25.27g

Reliable raw materials

Strong and sturdy

fast charging



New

2.4A



CB4032T

Output: 2.4A
Material: Liquid silicone
Length: 100cm
Product Weight: 25.05g

Reliable raw materials

Strong and sturdy

fast charging



New

2.4A



CB4032C&C

Output: 20W
Material: Liquid silicone
Length: 100cm
Product Weight: 24.76g

Reliable raw materials

Strong and sturdy

fast charging



New

2.4A



CB4032C&i

Output: 20W
Material: Liquid silicone
Length: 100cm
Product Weight: 24.47g

Reliable raw materials

Strong and sturdy

fast charging



New

3A



CB4033i

Output: 3A
Material: braided wire
Length: 120cm
Product Weight: 32.52g
Color: White/Black

Braided Wire Protection

Strong and sturdy

Fast charging



New

66w



CB4033T

Output: 66W
Material: braided wire
Length: 120cm
Product Weight: 35.15g
Color: White/Black

Braided Wire Protection

Strong and sturdy

Fast charging



New

60w



CB4033C&C

Output: 60W
Material: braided wire
Length: 120cm
Product Weight: 33.73g
Color: White/Black

Braided Wire Protection

Strong and sturdy

Fast charging



New

30w



CB4033C&i

Output: 30W
Material: braided wire
Length: 120cm
Product Weight: 34.2g
Color: White/Black

Braided Wire Protection

Strong and sturdy

Fast charging



New

100w



CB4034C&C

Output: 100W
Material: braided wire
Length: 120cm
Product Weight: 33.73g

Braided Wire Protection

Strong and sturdy

Fast charging



New

3A



CB4035i

Output: 3A
Material: Zinc alloy + braided wire
Length: 120cm
Product Weight: 34.7g

Braided Wire Protection

Strong and sturdy

Fast charging



New

66w



CB4035T

Output: 66W
Material: Zinc alloy + braided wire
Length: 120cm
Product Weight: 35.18g

Braided Wire Protection

Strong and sturdy

Fast charging



New

60w



CB4035C&C

Output: 60W
Material: Zinc alloy + braided wire
Length: 120cm
Product Weight: 41.15g

Braided Wire Protection

Strong and sturdy

Fast charging



New

30w



CB4035C&i

Output: 30W
Material: Zinc alloy + braided wire
Length: 120cm
Product Weight: 33.19g

Braided Wire Protection

Strong and sturdy

Fast charging



New

3A



CB4036i

Output: 3A
Material: Braided wire + aluminum shell
Length: 120cm
Product Weight: 31.9g

Braided Wire Protection

Strong and sturdy

Fast charging



New

3A



CB4036T

Output: 66W
Material: Braided wire + aluminum shell
Length: 120cm
Product Weight: 32.2g



New

3A



CB4036C&C

Output: 60W
Material: Braided wire + aluminum shell
Length: 120cm
Product Weight: 29.8g



New

3A



CB4036C&i

Output: 30W
Material: Braided wire + aluminum shell
Length: 120cm
Product Weight: 29.7g



New

60w



CB4037C&C

Output: 100W
Material: Braided wire + aluminum shell
Length: 120cm
Product Weight: 29.8g



New

30w



CB4038i

Interface: iP
Output: 5V/3A
Material: braided wire + aluminum
Length: 1m/2m/3m
Color: White/Black



CB4038i



CB4038V

Interface: V8
Output: 5V/3A
Material: braided wire + aluminum
Length: 1m/2m/3m
Color: White/Black

Braided Wire Protection
 Strong and sturdy
 Fast charging

CB4038T

Interface: Type-C
Output: 5V/3A
Material: braided wire + aluminum
Length: 1m/2m/3m
Color: White/Black

Braided Wire Protection
 Strong and sturdy
 Fast charging

CB4038C&C

Interface: Type-C to Type-C
Output: 60W
Material: braided wire + aluminum
Length: 1m/2m/3m
Color: White/Black

Braided Wire Protection
 Strong and sturdy
 Fast charging

CB4038C&i

Interface: Type-C to iP
Output: 30W
Material: braided wire + aluminum
Length: 1m/2m/3m
Color: White/Black

Braided Wire Protection
 Strong and sturdy
 Fast charging

CB4039

Interface: USB-A to iP+TC+TC
Output: 3A
Material: braided wire + aluminum shell
Length: 1m(100cm+20cm)
Product Weight: 49g
Color: White/Black

Braided Wire Protection
 Strong and sturdy
 Fast charging



HDMI CABLE



HD03





HD01

Material: braided cable + aluminum shell
Bandwidth: 10Gbps
Length: 200cm
Resolution: 4K@60HZ

10

Support USB 3.1Gen2

4K

Support 4K@60Hz







HD02

Material: braided cable + aluminum shell
Bandwidth: 10Gbps
Length: 200cm
Resolution: 4K@60Hz/2K@165Hz/1080P @240Hz

10

Support USB 3.1Gen2

4K

Support 4K@60Hz

2K

Support 2K@165Hz

1080P

Support 1080P@240Hz







HD03

Material: braided cable + aluminum shell
Bandwidth: 18Gbps
Length: 100cm
Resolution: 4K@60HZ

18

Data transfer rate Support 32-channel

32

Support 32-channel sound effects

4Kx2K

Support 4Kx2K @60Hz resolution

HDCP

Compatible with HDCP







HD03-2

Material: braided cable + aluminum shell
Bandwidth: 18Gbps
Length: 200cm
Resolution: 4K@60HZ

18

Data transfer rate Support 32-channel

32

Support 32-channel sound effects

4Kx2K


Support 4Kx2K @60Hz resolution

HDCP

Compatible with HDCP







HD03-3

Material: braided cable + aluminum shell
Bandwidth: 18Gbps
Length: 300cm
Resolution: 4K@60HZ

18

Data transfer rate Support 32-channel

32

Support 32-channel sound effects

4Kx2K

Support 4Kx2K @60Hz resolution

HDCP

Compatible with HDCP






HD04

Material: braided cable + aluminum shell
 Bandwidth: 18Gbps
 Length: 100cm
 Resolution: 1080P@60HZ, 4K@60HZ, 2K@144HZ,
 2K@165HZ, backward compatible

4K

Support 4K @60Hz resolution

2K

Support 2K @144HZ/ @165Hz resolution

1080P

Support 1080P @60Hz resolution

18Gbps

Data transfer rate






HD04-2

Material: braided cable + aluminum shell
 Bandwidth: 18Gbps
 Length: 200cm
 Resolution: 1080P@60HZ, 4K@60HZ, 2K@144HZ,
 2K@165HZ, backward compatible

4K

Support 4K @60Hz resolution

2K

Support 2K @144HZ/ @165Hz resolution

1080P

Support 1080P @60Hz resolution

18Gbps

Data transfer rate






HD04-3

Material: braided cable + aluminum shell
 Bandwidth: 18Gbps
 Length: 300cm
 Resolution: 1080P@60HZ, 4K@60HZ, 2K@144HZ,
 2K@165HZ, backward compatible

4K

Support 4K @60Hz resolution

2K

Support 2K @144HZ/ @165Hz resolution

1080P

Support 1080P @60Hz resolution

18Gbps

Data transfer rate






HD05

Material: braided cable + aluminum shell
 Bandwidth: 20Gbps
 Length: 100cm
 Resolution: 4K@60Hz
 Current: 20V/5A 100W(Max)

4K

Support 4K @60Hz resolution

20Gbps

Data transfer rate

3.2A

USB3.2 Gen2*2

100W

Support maximum 20V 5A 100W charging






HD05-2

Material: braided cable + aluminum shell
 Bandwidth: 20Gbps
 Length: 200cm
 Resolution: 4K@60Hz
 Current: 20V/5A 100W(Max)

4K

Support 4K @60Hz resolution

20Gbps

Data transfer rate

3.2A

USB3.2 Gen2*2

100W

Support maximum 20V 5A 100W charging







HD06-3

New



HD07

Product material: aluminum alloy + braided wire
Interface type: RJ45 Gigabit Ethernet port
Network standard: adaptive 10/100/1000Mbps
Line length: 30cm



Braided Wire Protection



New



HD08

Product material: Nylon braid + aluminum shell
Bandwidth: 10Gbps
Output: 3A
Line length: 100cm



Braided Wire Protection



New



HD08-2

Product material: Nylon braid + aluminum shell
Bandwidth: 10Gbps
Output: 3A
Line length: 200cm



Braided Wire Protection



New



HD09

Product material: Nylon braid + aluminum shell
Bandwidth: 10Gbps
Output: 60W(20V/3A)
Line length: 100cm



Braided Wire Protection



New



HD09-2

Product material: Nylon braid + aluminum shell
Bandwidth: 10Gbps
Output: 60W(20V/3A)
Line length: 200cm



Braided Wire Protection



HD06-1

Material: PVC
Bandwidth: 5Gbps
Length: 100cm

5 Gbps
Transmission rate

2.0 USB
Backward compatible

1.1 USB
Backward compatible



HD06-2

Material: PVC
Bandwidth: 5Gbps
Length: 200cm

5 Gbps
Transmission rate

2.0 USB
Backward compatible

1.1 USB
Backward compatible



HD06-3

Material: PVC
Bandwidth: 5Gbps
Length: 300cm

5 Gbps
Transmission rate

2.0 USB
Backward compatible

1.1 USB
Backward compatible



CAR CHARGER



CC521C

CC517

CB518C



CC509

Material: ABS
Function: Dual USB output, multiple circuit protection
USB PORT: 2 X USB
Input: 12-24V
Output: 5V / 2.1A
Size: 74 X 40 X 23mm
Color: White



CC517

Material: Aluminum Alloy+PC
Function: Dual USB output, multiple circuit protection
USB PORT: 2 X USB
Input: 12-24V
Output: 5V / 2.4A
Size: 63 X 28 X 28mm
Color: Grey



CC517C

Material: Aluminum Alloy+PC
Protocol: PD2.0, QC3.0, QC2.0, FCP, AFC
USB PORT: 2 X USB Input: 12-24V
Output: UCB-C: 5V / 3A, 9V / 2.25A, 12 / V1.6A, (PD 20W MAX)
UCB-A: 5V / 3A, 9V / 2A, 12 / V1.5A, (QC 18W MAX)
Size: 63 X 28 X 28mm
Color: Grey



CC518

Material: PC flame retardant
Function: Dual USB output, multiple circuit protection
USB PORT: 2 X USB
Input: 12-24V
Output: 5V / 2.4A
Size: 64 X 31 X 31mm
Color: Black



CC518C

Material: PC flame retardant
Protocol: PD2.0, QC3.0, QC2.0, FCP, AFC
USB PORT: 2 X USB Input: 12-24V
Output: UCB-C: 5V / 3A, 9V / 2.25A, 12 / V1.6A, (PD 20W MAX)
UCB-A: 5V / 3A, 9V / 2A, 12 / V1.5A, (QC 18W MAX)
Total output: 5V / 3.1A smart balance shunt
Size: 64 X 31 X 31mm Color: Black





CC521C

Material: Aluminum alloy + ABS
Protocol: supporting PD2.0/PD3.0/PPS; QC2.0/QC3.0/AFC/FCP/SCP and other mainstream fast charging protocols
Input: 12-24V
USB output: DC 4.5V/5A, 5V/4.5A, 5V/3.6A, 9V/2.5A, 12V/2.25A (27W Max)
Type-C output: DC 5V/3.6A, 9V/3A, 12V/2.25A, 20V/2.25A (45W Max)
Size: 33 X 33 X 73mm Weight: 43g
Color: Translucent gray



CC527

Material: Plastic+PC
Input: DC 12-24V
USB1 output: 4.5V 5A, 5V 4.5A, 5V 3.6A, 9V 2.5A, 12V 2.25A (27W Max)
USB2 output: 5V 3.4A, 9V 2A, 12V 1.5A (18W Max)
USB3 output: 4.5V 5A, 5V 4.5A, 5V 3.6A, 9V 2.5A, 12V 2A (24W Max)
Type-C output: 5V 3.6A, 9V 3A, 12V 2.25A, 20V 2.25A (45W Max)
Cigarette lighter output: 60W Max (Cigarette lighter not supported)
USB total output: 27W+18W+45W (USB3/Type-C shared): (90W) (Max)
Host size: about 61.4*60.4*31mm
Car charger size: about 95*34.3*34.3mm
Color: Black

27w + 18w + 45w + 60w
Output Power Output Power Output Power Output Power



CC522C

Material: Aluminum alloy
Protocol: PD20W is really fast charging, supports all Apple mobile phones, supports PD20W, QC3.0/QC2.0, AFC, PPS and other charging protocols
Input: 12-24V
USB output: DC 5V/3A, 9V/2A, 12V/1.5A (18W Max)
Type-C output: DC 5V/3A, 9V/2.22A, 12V/1.67A (20W Max)
Size: 24 X 20.5 X 38.5mm Weight: 22.75g
Color: Metal Grey



CC529

Material: PC flame retardant
Protocol: USB1 Port: QC2.0/QC3.0/AFC/FCP/SCP/SFCP/MTK PE+1.1/PE+2.0; USB2 Port: QC2.0/QC3.0/AFC/FCP/SCP/SFCP/MTK PE+1.1/PE+2.0; Type-C Port: QC2.0/QC3.0/AFC/FCP/PD2.0/PD3.0/PPS USB PORT: 3 X USB
USB1/2 Output: 4.5V=5A, 5V=4.5A, 5V 3.6A, 9V 2.5A, 12V=2A (24W Max) Type-C Output: 5V 3.6A, 9V 3A, 12V 2.25A, 20V=2.25A (45W Max) Total output power: USB1/USB2 (shared 24W)+Type-C (45W) Size: 20.6 X 86 X 20.6mm
Weight: 28g Color: Metal Grey

24w + 45w
USB1/USB2 Output Power Type-C Output Power



CC523C

Material: PC+Aluminum Alloy
USB port: QC2.0/QC3.0/AFC/FCP/SCP/SFCP/BC12/Apple/MTK PE+1.1/MTK PE+2.0
Type-C port: PD2.0/PD3.0/PPS/QC2.0/QC3.0/AFC/FCP/SCP
Input: DC12-24V USB-A output: 4.5V/5A, 5V/4.5A, 5V/3.6A, 9V/2.5A, 12V/2A (24W Max) Type-C output: 5V/3.6A, 9V/3A, 12V/2.25A, 20V/2.25A (45W Max) USB-A + Type-C output: 5V/4.8A Product size: 97mm*61mm*33mm Product weight: 53g
Color: Black + Space gray The total output power of the expansion port: 80W (does not support the cigarette lighting function)



CC525C

Material: Aluminum alloy
Protocol: Support PD2.0, QC3.0/QC2.0, FCP, AFC, PPS and other charging protocols.
Input: DC12-24V
Type-C 1 output: 5V/3A, 9V/2.22A, 12V/1.67A (20W Max)
Type-C 2 output: 5V/3A, 9V/2.22A, 12V/1.67A (20W Max)
PPS: 3.3-11V/2A (22W Max)
Simultaneous use of Type-C+Type-C: 20W+20W(Max)
Size: 25.5*60.8*25.5mm Weight: 27g Color: Metal Grey/ Green



CC524C

Material: Aluminum alloy
Protocol: Support PD3.0, PD2.0, QC3.0/QC2.0, FCP, SCP, AFC, PPS and other charging protocols.
Input: 12-24V USB output: 5V/3A, 9V/3A, 12V/2.5A (30W Max)
Type-C output: 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (30W Max)
PPS: 11V/3A (33W Max)
Size: 23.5*44*23.5mm Weight: 28.3g
Color: Metal Grey



CC530

Input: DC12-24V
USB1 port output: 5V/3A, 9V/2A, 12V/1.5A (18W Max)
USB2 port output: 5V/3A, 9V/2A, 12V/1.5A (18W Max)
USB1 port + USB2 simultaneous output total power: 5V/3.4A Max
Ports: 2-USB Product size: 28.2*57.1*28.2mm
Product weight: 17g
Working temperature: -10°C - 50°C
Color: Translucent brown & Translucent blue



CC526

Input: DC 12-24V
Output: DC 5V / 2.4A
Ports: 2-USB
Size: 25 * 57 * 25mm
Weight: 19g
Color: Grey



CC531

Input: DC12-24V
USB-A port output: 5V/3A, 9V/2A, 12V/1.5A (18W Max)
USB-C port output: 5V/3A, 9V/3A, 12V/2.5A (30W Max)
PPS: 3.3V-11V/3A (33W Max)
USB-A+USB-C output at the same time Total power: 5V/3.4A Max Ports: 2-USB
Product size: 28.2*57.1*28.2mm
Product weight: 16.5g
Working temperature: -10°C - 50°C
Color: Translucent brown & Translucent blue



HOT

30w
(max)



CC532

Input: 12-24V, DC 3.5A
USB Output: DC 5V $\overline{=}$ 3A, 9V $\overline{=}$ 2A, 12V $\overline{=}$ 1.5A (18W)
Type-C Output: DC 5V $\overline{=}$ 3A, 9V $\overline{=}$ 3A, 12V $\overline{=}$ 2.5A (30W)
Total Output: DC 5V $\overline{=}$ 3.0A Max
Ports: 2-USB Product Size: 25 * 48 * 25mm
Product Weight: 14.5g
Working Temperature: -10°C - 65°C
Color: Black/White



CC533

Input: 12-24V DC 2A
Output: DC 5V $\overline{=}$ 2.4A
Ports: 2-USB
Size: 25 * 48 * 25mm
Weight: 14.1g
Working temperature: -10°C - 65°C
Color: Black/White



30w
(max)



CC534

Input: 12-24V, DC 3.5A
USB Output: DC 5V $\overline{=}$ 3A, 9V $\overline{=}$ 2A, 12V $\overline{=}$ 1.5A (18W)
Type-C Output: DC 5V $\overline{=}$ 3A, 9V $\overline{=}$ 3A, 12V $\overline{=}$ 2.5A (30W)
Total Output: DC 5V $\overline{=}$ 3.0A Max
Ports: 2-USB
Product Size: 23.6 * 42.6 * 23.6mm
Product Weight: 11g
Working Temperature: -10°C - 65°C
Color: Transparent Brown & Transparent



18w
(max)



CC535

Input: 12-24V DC 2A
Output: DC 5V $\overline{=}$ 3A, 9V $\overline{=}$ 2A, 12V $\overline{=}$ 1.5A (18W)
Port: 1-USB
Size: 25 * 48 * 25mm
Weight: 11g
Working temperature: -10°C - 65°C
Color: Transparent Brown & Transparent



18w
(max)



CC536

Input: DC 12-24V
Output: DC 5V/3A, 9V/2A, 12V/1.5A (18W)
Port: 1-USB
Size: 24.7 * 53.3 * 24.7mm
Weight: 16.3g
Working temperature: -10°C - 55°C
Color: Grey



CC537

36W

36w
(max)



CC537

Input: DC 12-24V
USB1 Output: 5V/3A, 9V/2A, 12V/1.5A, 18W MAX
USB2 Output: 5V/3A, 9V/2A, 12V/1.5A, 18W MAX
USB-1+USB-2 common output: 36W Max
Ports: 2-USB Product Size: 25 * 62.5 * 25mm
Product Weight: 23.4g
Working Temperature: -10°C - 55°C
Color: grey



HOT

10W
(max)

CC538

Input: 12-24V, DC 3.5A
 USB Output: DC 5V=3A, 9V=2A, 10V=2.25A (18W),
 12V=3A, 20V=3A (60W Max)
 Type-C1/C2 Output: 5V=3A, 9V=3A, 12V=3A,
 15V=3A, 20V=5A, 3.3~21V=5A (100W Max)
 USB+Type-C2 output: 5V=3.4A Product Size: 43.8*43.8*79.3mm
 Product Weight: 56.6g Working Temperature: -10°C - 55°C
 Color: Black



Fast charge agreement



Security Protocol



fast charging



CC539

Input: 12-24V
 USB Output: DC 5V=3A, 9V=2.5A, 12V=2.5A (30W Max)
 Type-C Output: DC 5V=3A, 9V=2.5A, 12V=2.5A (30W Max)
 USB-A+USB-C output: 5V 3A (Max) iP cable output:
 9V=3A (27W Max) Type-C cable output: 5V=3A, 9V=3A, 12V=3A,
 15V=3A, 20V=3A, 3.3V~11V=3A; 3.3~21V=3A (60W Max)
 Product Size: 57.3*32.2*122.9mm Product Weight: 112.9g
 Working Temperature: -10°C - 55°C



Fast charge agreement



Security Protocol



fast charging

33W
(max)

CC541

Input: 12-24V
 Type-C Output: DC 5V=3A, 9V=3A,
 12V=2.5A (30W) PPS: 3.3~11V=3A (33W)
 Product Size: 25.3*27.2*46.7mm
 Product Weight: 15.9g
 Working Temperature: -10°C - 55°C



Fast charge agreement



Security Protocol



fast charging

33W
(max)

CC542

Input: 12-24V
 USB output: DC 5V=3A, 9V=2A, 12V=1.5A (18W)
 Type-C output: DC 5V=3A, 9V=3A,
 12V=2.5A (30W) PPS: 3.3~11V=3A (33W)
 Size: 25.3*26.4*52.7mm
 Weight: 20.2g
 Working temperature: -10°C - 55°C



Fast charge agreement



Security Protocol



Super fast charging

33W
(max)

CC543

Input: DC 12-24V
 Type-C1 output: DC 5V=3A, 9V=3A, 12V=2.5A
 Type-C2 output: DC 5V=3A, 9V=3A,
 12V=2.5A PPS: 3.3~11V=3A
 Total power: 30W+30W Max
 Size: 25.1*25.1*61.5mm Weight: 26.2g
 Working temperature: -10°C - 55°C



Fast charge agreement



Security Protocol



Super fast charging



CC539



FM01

Shell material: ABS+PC+ TPE
Input voltage: DC 5V Bluetooth version: V5.0
Bluetooth distance: ≤10 meters TF card capacity: ≤64GB
Cable length: about 1.2m Product size: about 68*31*16mm
Product weight: 33g
TF card support format: MP3 / WAV / FLAC / WMA
Color: Black



48w

Total Output Power



FM02

Wireless version: V5.0 Wireless distance: ≤10m
Wireless frequency: 2.4GHz FM operating frequency:
88.1-107.9MHz FM effective transmission distance: ≤5m
Support MP3/WMA/WAV/FLAC/APE and other audio formats
Input: DC12-24V USB output: 5V/3A, 9V/2A,
12V/1.5A (18W Max) Type-C output: 5V/3A, 9V/3A, 12V/2.5A,
15V/2A, 20V/1.5A (30W Max) PPS: 3.3-11V/3A Max
USB-A+Type-C total output: 48W (18W+30W)
Ports: 2-USB Size: 49 X 72 X 41mm Weight: 32g
Color: Dark grey/Purple



New

48w

Total Output Power



FM03

Wireless version: V5.0 Wireless distance: ≤10m
Wireless frequency: 2.4GHz
FM operating frequency: 88.1-107.9MHz
FM effective transmission distance: ≤5 meters
Support MP3/WMA and other audio formats
Wireless support A2DP/AVRCP/HFP/HSP and other modes
Support TF card/U disk capacity: ≤64GB
Input: DC12-24V USB output: 5V/3A, 9V/2A, 12V/1.5A (18W Max)
Type-C output: 5V/3A, 9V/3A, 12V/2.5A (30W Max)
PPS: 3.3-11V/3A Max USB-A+Type-C total output:
48W (18W+30W) Ports: 2-USB Product size: 42*85*52mm
Product weight: 45.3g Working temperature: -10°C - 40°C
Color: Black



CAR BRACKET



HC1517



HC1505

Material: Kirsite+silica gel
 Surface treatment: Plating
 Size: 70 X 20 X 5.5mm
 Weight: 26.8g
 Package: 100 X 143 X 54mm
 Applicable Scene: Central control platform
 Applicable: 4.7-6.5 inch mobile phone

- 




- Good compatibility

Safe and reliable

Firm and stable



HC1511

Material: ABS/Silica gel
 Surface treatment: Carbon fibre+Texture
 Size: 56 X 43 X 14mm
 Package: 100 X 143 X 54mm
 Weight: 44g
 Applicable: 4.7-6.5 inch mobile phone
 Applicable Scene: Center console, table, Air outlet

- 




- Good compatibility

Safe and reliable

Firm and stable



HC1514

Material: PC+ non-slip silicone
 Size: 148.5 X 91 X 120.5mm
 Weight: 190.7g
 Applicable: 4.7-6.5 inch mobile phone

- 




- Good compatibility

Safe and reliable

Firm and stable



HC1517

Material: ABS+PC
 Charging time: 0.8h
 Size: 80 X 157 X 107mm
 Package: 76 X 148 X 75mm
 Weight: 187g
 Applicable: 4.7-6.5 inch mobile phone
 Applicable Scene: Center console, table

- 




- Good compatibility

Safe and reliable

Firm and stable



HC1519

Material: ABS+magnet+silicone
 Size: 68 X 37mm
 Package: 67 X 115 X 54mm
 Weight: 29g
 Applicable: 4.7-6.5 inch mobile phone

- 




- Good compatibility

Safe and reliable

Firm and stable





HC1524

Material: ABS+ silica gel
Product size: 195*94*70mm
Weight: 128g
Applicable: 4.7-6.5 inch mobile phone
Applicable Scene: Inside rear view mirror



HC1520

Material: ABS+magnet+silicone
Size: 33.5 X 33.5 X 8.6mm
Weight: 19.5g
Applicable: 4.7-6.5 inch mobile phone



HC1523

Material: PC + aluminum alloy
Input: 5V/2A 9V/2A
Output power: 5W/7.5W/10W/15W
Transmission distance: 2-6mm Charging interface: Type-C
Transmission efficiency: ≥75%
Product size: 63*112*63mm Weight: 70.8g
Applicable: 4.7-6.5 inch mobile phone
Applicable Scene: Air outlet



HC1522

Material: PC+ABS+ silicone + hardware
Product Size: 280*73*105mm
Weight: 185g
Applicable: 4.7-6.5 inch mobile phone
Applicable Scene: Center console/windshield



HC1521

Material: PC+ABS+ silicone + hardware
Product Size: 130*73*105mm
Weight: 98g
Applicable: 4.7-6.5 inch mobile phone
Application: Air outlet





HC1525

Material: ABS+PC+silica gel
Product size: 108*90*60mm
Weight: 81.5g
Applicable: 4.7-6.5 inch mobile phone
Applicable Scene: bicycle / motorcycle / electric car



HC1526

Material: ABS+Glass
Product Size: 630*495*350mm
Weight: 117g
Applicable: 4.7-6.5 inch mobile phone
Application: Desk



HC1527

Material: ABS+Aluminum alloy
Product Size: 75*120*26mm
Weight: 156g
Applicable: 4.7-6.5 inch mobile phone
Applicable Scene: Desk



HC1528

Material: ABS+Aluminum+Silicone
Product size: 178*115*136mm
Weight: 132.6g
Applicable: 4-13 inch mobile phone and Pad
Applicable Scene: car seat rear



HC1529

Material: Silicone+PC+ABS
Product size: 103*111.5*100mm
Weight: 83.5g
Applicable: 4-13 inch mobile phone and Pad
Applicable Scene: Air outlet





HC1532

Material: Aluminum alloy+silicone non-slip mat
Product size: 44*264*22mm
Weight: 239.3g



New



HC1530

Material: PC+Silicone
Input: 5V/2A 9V/2A
Output power: 5W/7.5W/10W/15W
Transmission distance: 2-6mm
Charging interface: Type-C
Transmission efficiency: ≥75%
Product size: 63*109.7*116mm Weight: 104.7g
Applicable: 4.7-6.5 inch mobile phone
Applicable Scene: Air outlet



New



HC1531

Material: PC+Silicone
Input: 5V/2A 9V/2A
Output power: 5W/7.5W/10W/15W
Transmission distance: 2-6mm
Charging interface: Type-C
Transmission efficiency: ≥75%
Product size: 71*252*71mm Weight: 190g
Applicable: 4.7-6.5 inch mobile phone
Applicable Scene: Center console/windshield



New



HC1533

Material: ABS+Metal
Product size: 60*60*116mm
Weight: 73.4g



New



HC1534

Output power: 15W Max
Input: 5V/2A, 9V/2A, 12V/2A QC, PD
Output: 5W/7.5W/10W/15W
Product Size: 86.5*130*65 mm
Weight: 79.5g



HC1536

New



HC1535

Material: ABS+tempered glass
Input: 5V/2A 9V/2A 12V/2A
Output power: 5W/7.5W/10W/15W
Charging distance: ≤10mm
Charging interface: Type-C
Transmission efficiency: ≥82%
Product size: 125*69*13mm Weight: 152.7g
Working temperature: -10℃-45℃



New



HC1536

Material: ABS+tempered glass
Input: 5V/2A 9V/2A 12V/2A
Output power: 5W/7.5W/10W/15W
Charging distance: ≤10mm
Charging interface: Type-C
Transmission efficiency: ≥82%
Product size: 125*69*13mm Weight: 243g
Working temperature: -10℃-45℃



New



HC1537

Material: Material: zinc alloy + magnet
Product Size(after folding): 58*58*18mm
Weight: 91g



New



HC1540

Material: ABS+Aluminum alloy+
thermal conductive silicone
Input: 9V/3A Output power: 5W/7.5W/10W/15W
Charging interface: Type-C
Product size: 66*66*47mm
Weight: 94.8g



New



HC1541

Material: ABS+Aluminum alloy+
thermal conductive silicone
Input: 9V/3A Output power: 5W/7.5W/10W/15W
Charging interface: Type-C
Product size: 66*66*47mm
Weight: 200.9g



New



HC1542

Material: ABS+PC+silica gel
Product size: 216.5*66.2*13mm
Weight: 102.3g



New



HC1543

Material: PC+silica gel
Input: 5V/2A, 9V/2A
Output power: 5W/7.5W/10W/15W
Charging interface: Type-C
Transmission efficiency: ≥75%
Product size: 216.5*66.2*20.2mm
Weight: 122.3g



New



HC1544

Output power: 15W Max
Input: 5V/2A, 9V/2A, 12V/1.5A
Output: 5W/7.5W/10W/15W (MAX)
Cord length: 90cm
Product Size: 64*64*116mm
Weight: 112g



WIRELESS CHARGING



WLC1405



WLC1405

Function: With magnetic function, support Phone 12
Material: ABS+Aluminum Alloy
Input: 5V / 2A, 9V / 2A
Output power: 5W/7.5W/10W/15W(Max)
Charging efficiency: $\geq 70\%$
Charging distance: $\leq 5\text{mm}$
Charging cable length: 100cm
Color: Gray



WLC1407

Function: With magnetic function, support phone 12-13 series
Shell material: Tempered glass + aluminum alloy + nylon braided wire
Input power: 5V/2A; 9V/2A
Output power: 5W/7.5W/10W/15W(Max)
Transmission distance: $\leq 5\text{mm}$
Charging efficiency: $\geq 70\%$
Size: 60.5 X 60.5 X 6.4mm
Weight: 55.2g
Color: black grey



WLC1408

Function: With magnetic function, Supports Phone 12-13 and wireless watches and wireless headphones
Shell material: ABS+Silicone Input power: 5V/2A, 9V/2A
Output Power: Mobile phone output: 5W/7.5W/10W/15W
Airpods output: 5W max
Watch output: 2.5W (support 1-7 generations)
Transmission distance: 2-6mm
Charging efficiency: $\geq 75\%$ Size: 247 X 75.4 X 7.5mm
Weight: 117g Color: White



WLC1409

Function: With magnetic function, Supports Phone 12-13 and wireless watches and wireless headphones
Shell material: ABS+Silicone
Input power: 5V/2A, 9V/2A
Output Power: Mobile phone output: 5W/7.5W/10W/15W
Watch output: 2.5W (support 1-7 generations)
Transmission distance: 2-6mm
Charging efficiency: $\geq 75\%$ Size: 162 X 75.4 X 7.5mm
Weight: 91g Color: White



WLC1410

* 15W metal three-in-one bracket wireless charging, ultra-thin body, aviation-grade aluminum alloy, good heat dissipation, fast charging;
* Atmosphere indicator light, charging is clear at a glance, it can be charged as soon as it is placed, and the strong magnetic suction can fix the watch from falling
Case material: aluminum alloy Type-C input voltage: DC 9V-12V (PD/QC3.0 adapter) Magnetic wireless charging output power: 5W/7.5W/10W/15W(Max) iWatch: 2.5W (MAX)
Airpods: 3W (MAX) Weight: 170g
size: 138 * 95 * 118mm Color: Dark purple/Space gray





WLC1411-U

Function: Compatible with IP Watch 1/2/3/4/5/6/
7/8/SE/SE2/Ultra series watches
Material: ABS+TPE
Input: 5V / 1A
Output power: 3W(Max)
Charging efficiency: $\geq 75\%$
Charging cable length: 120cm
Color: White



WLC1411-T

Function: Compatible with IP Watch 1/2/3/4/5/6/
7/8/SE/SE2/Ultra series watches
Material: ABS+TPE
Input: 5V / 1A
Output power: 3W(Max)
Charging efficiency: $\geq 75\%$
Charging cable length: 120cm
Color: White





WLC1413



WLC1415



WLC1412-L

Product material: silicone + zinc alloy + PC
Charging interface: Lightning
Charging power: 2.5W Max
Support function: wireless charging
Product weight: 21.5g
Working temperature: -10°C-50°C
Color: White/Black



WLC1413

Material: aluminum alloy + PC Input: 9V-20V (QC/PD)
Phone output: 5W/7.5W/10W/15W
Earbuds output: 5W Watch output: 2.5W
Port: Type-C Product weight: 145g
Product size: 132*103*72mm
Working temperature: -10°C-45°C



WLC1412-C01

Product material: silicone + zinc alloy + PC
Charging interface: Type-C female seat
Charging power: 2.5W Max
Support function: wireless charging
Product weight: 21.5g
Working temperature: -10°C-50°C
Color: White/Black



WLC1414

Material: aluminum alloy + PC Input: 9V-20V (QC/PD)
Phone output: 5W/7.5W/10W/15W
Earbuds output: 5W Watch output: 2.5W
Port: Type-C Product weight: 130.4g
Product size: 132*103*72mm
Working temperature: -10°C-45°C



WLC1412-C02

Product material: silicone + zinc alloy + PC
Charging interface: Type-C public seat
Charging power: 2.5W Max
Support function: wireless charging
Product weight: 21.5g
Working temperature: -10°C-50°C
Color: White/Black



WLC1415

Material: ABS+PC
Speaker battery capacity: 1000mAh polymer
Wireless charging output: 15W
Night light power: 2.4W Interface: Type-C
Product weight: 306g Base size: 210*95*11.5mm
Speaker size: 88*80.5*81.5mm
Working temperature: -10°C-45°C





New

WLC1416

Material: ABS+PC+silica gel
Input: 9V-20V (QC/PD)
Phone Output: 5W/7.5W/10W/15W
Earbuds output: 5W Watch output: 2.5W
Port: Type-C
Product weight: 196.3g
Product size: 68*68*65mm
Working temperature: -10°C-45°C



Qi wireless charging Power Protection Ultra fast sensing




New

WLC1417

Material: TPU+aluminum alloy+silica gel
Input: 9V/2A
Mobile phone output: 5W/7.5W/10W/15W
Headphone output: 5W
Watch output: 2.5W Interface: Type-C
Product weight: 236g
Product size: 194*102*100mm
Working temperature: -10°C-45°C



Qi wireless charging Power Protection Ultra fast sensing



New

WLC1418

Material: ABS+zinc alloy+silica gel
Input: 9V/2A, 12V/2A
Phone output: 5W/7.5W/10W/15W
Earbuds output: 3W
Watch output: 2.5W Port: Type-C
Product weight: 213.5g
Product size: 88*80*25mm
Working temperature: -10°C-45°C



Qi wireless charging Power Protection Ultra fast sensing



New


WLC1419

Material: ABS+TPE
Type-C output: 60W Max
Wireless output: 2.5W Max
length: 120cm
product weight: 30.93g
color: White
Operating temperature: -10°C-50°C



Qi wireless charging Power Protection Ultra fast sensing



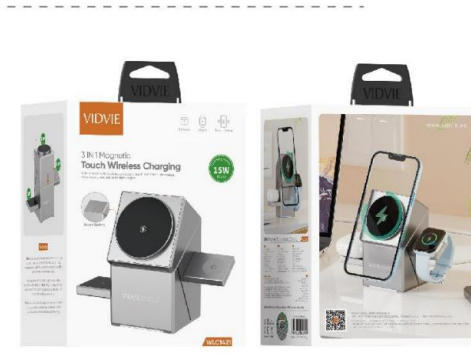

GLASS FILMS AND PROTECTIVE CASES




FL1309

CA2726




BR2801

4G	4S	4P	4SP
1810mAh	1715mAh	2915mAh	2750mAh
7G	7P	8G	8P
1960mAh	2900mAh	1821mAh	2691mAh
X	XS	XS Max	XR
2716mAh	2658mAh	3174mAh	2716mAh
11	11Pro	11Pro Max	
3110mAh	3046mAh	3969mAh	
12G/12Pro	12Pro Max		
2815mAh	3687mAh		



FL1308

Material: high alumina silica glass
 Advantage: Quick exhaust without bubbles
 Surface: Vacuum plating anti-fingerprint layer
 High-definition anti-blue light
 Thickness: 0.33mm
 Additional: Built-in film auxiliary package



FL1309

Material: high alumina silica glass
 Advantage: Quick exhaust without bubbles
 Surface: Vacuum plating anti-fingerprint layer
 Anti-peep angle 28 degrees
 Thickness: 0.33mm
 Additional: Built-in film auxiliary package



FL1312

Material: high alumina silica glass
 Advantage: Quick exhaust without bubbles
 Surface: Vacuum plating anti-fingerprint layer
 High-definition anti-blue light
 Thickness: 0.33mm
 Additional: Built-in film auxiliary package



FL1313

Material: high alumina silica glass
 Advantage: Quick exhaust without bubbles
 Surface: Vacuum plating anti-fingerprint layer
 Anti-peep angle 28 degrees
 Thickness: 0.33mm
 Additional: Built-in film auxiliary package



FL1317




FL1314

Material: high aluminum full screen full glass tempered film
Advantages: Quick exhaust without bubbles
Surface: Ultra-high hardness, full-screen explosion-proof, high-purity light-transmitting glass, greatly reducing color loss and presenting the original image quality
Thickness: 0.33mm
Additional: Built-in Foil Auxiliary Pack



FL1315

Material: high aluminum glass + metal material, 3D all-inclusive process
Advantages: high aluminum glass, anti-scratch and wear-resistant, comprehensive coverage of anti-glare, high aluminum glass is not fragile
Thickness: 0.33mm



FL1317

* High-definition dustproof, one-piece full coverage, original touch, sensitive touch;
* HD transparent, original picture quality, scratch-resistant, explosion-proof screen.



FL1318

* A pull dust-free second paste, electrostatic dust removal, automatic positioning exhaust.
* New oleophobic technology, strong anti-fingerprint, wear-resistant and anti-scratch, explosion-proof screen.





CA2717

Material: High-purity TPU raw materials
Thickness: 0.8mm
Surface:
The surface is slightly frosted
Protection:
The camera ring is heightened to prevent abrasion



CA2723

Material: TPU ultra-fine soft frame
Applicable models: Full range of phones
Surface: Using high polymer anti-oxidant environmental protection material, high permeability texture, full of real machine beauty, long-term use does not turn yellow
It is better to match VIDVIE magnetic wireless charger 1405
Color: Transparent



CA2719

Material: high-purity TPU raw material
Thickness: 0.8mm
Surface: Texture design on the back, effectively preventing fingerprint stains
Protection:
The camera ring is heightened to prevent wear
Color: blue/black



CA2724

Material: TPU ultra-fine soft frame
Applicable models: Full range of phones
Surface: Using high polymer anti-oxidant environmental protection material, high permeability texture, full of real machine beauty, long-term use does not turn yellow
Color: Translucent Black/Translucent Blue/Translucent



CA2720

Material: PC+TPU soft glue imported from Germany
Thickness: 0.8mm
Surface: translucent material, honeycomb pattern design
Protection:
The camera ring is heightened to prevent wear
Color: Transparent green/transparent black



CA2724-Magnetic models

Material: TPU ultra-fine soft frame
Applicable models: 12 series or more phones
Surface: Using high polymer anti-oxidant environmental protection material, high permeability texture, full of real machine beauty, long-term use does not turn yellow
Color: Translucent Black/Translucent Blue/Translucent



CA2721

Material: Transparent and hard back panel + TPU soft edge black frame design
Thickness: 0.8mm
Surface: high translucent back version, pure and transparent, TPU soft edge feels comfortable, anti-skid
Protection: The camera ring is heightened to prevent wear
Color: Transparent blue/transparent black



CA2726 High-transparent magnetic suction section

Material: TPU ultra-fine soft frame, made by high permeability process
Applicable models: 12 series or above cell phones
Surface: Highly transparent polymer antioxidant environmental protection material, will not turn yellow in long-term use.
Color: Highly transparent / translucent blue / translucent black



CA2722

Material: Matte and hard back panel + TPU soft edge design
Thickness: 0.8mm
Surface: Matte surface design, long-term use is not easy to yellow, strong anti-fingerprint
Protection:
The camera ring is heightened to prevent wear
Color: Transparent/transparent Brown



CA2720-Pad

Material: Diamond grade PC backplane
Applicable models: Full range of Pad
Surface: Four-corner AIRS airbag, invisible nano airbag, military-grade anti-drop, built-in stand, integrated pen slot, non-impeded Pencil magnetic absorption and charging, and wireless charging with a case, 360° comprehensive protection to prevent the screen from cracking





CA2727



CA2725

Material: TPU+Metal

Feature: All-in-one design, precise fit, tightly packaged, anti-drop and anti-collision, easy to hang and take; Support washing, signal unobstructed, is a variety of scenes, compact and convenient, multi-color optional.

Size: 61.8 X 40.4 X 2mm

Weight: 12g

Color: Black/Blue/Green/Pink



Precise adaptation



Drop and bang-proof



Unobstructed signal



New



CA2726

Material: High purity TPU high permeability raw material

Thickness: 0.8 mm

Surface: Effective against fingerprint stains

Protection aspect: camera ring raised to prevent wear and tear

Color: Highly transparent / translucent blue / translucent black



Protect the lens



Anti-fall



Airbag protection



New



CA2727-Frosted

Material: high purity TPU frosted raw material

Thickness: 0.8 mm

Surface: Effective against fingerprint stains

Protection aspect: camera ring raised to prevent wear and tear

Color: Frosted transparent / Frosted translucent blue / Frosted translucent black



Protect the lens



Anti-fall



Airbag protection



New



CA2727 Frosted magnetic models

Material: TPU ultra-fine soft frame, made by frosting process

Applicable models: 12 series or above cell phones

Surface: frosted polymer antioxidant environmental protection materials, long-term use will not turn yellow.

Color: Frosted transparent / Frosted translucent blue / Frosted translucent black



Protect the lens



Anti-fall



Airbag protection



01 FL1310-PVC

Material: PVC Size: 180 X 120mm
Thickness: 0.15mm
Packing: 50pcs/box, 20 boxes/carton
If you place an order of 2,000 sheets, you will get 2 knives and needles.

50pcs



02 Special Cleaning Tools

Cleaner ingredients:
Surface active agent, deionized purified water, antibacterial agent (without alcohol)
Order 1 film cutting machine and 1 set of cleaning kit will be given, accessories include:
250ml detergent*1, cleaning cloth*5, scratch card*5



05 FCM01

Maximum cutting width: 180mm
Maximum film penetration depth: 120mm
Film slot width: 185mm Cutting precision: 0.1mm
Cutting speed: 300-500mm/S Cutting pressure: 350g
The input voltage: 100-240V The output voltage: 24V 2.75A DC
Machine power: <100W Product Size: 500 x 200 x 170mm
The net weight: 7kg



06 FL-1311-TPU

Material: TPU Size: 200 X 280mm
Thickness: 0.15mm
Packing: 20pcs/box, 10 boxes/carton
If you place an order of 2,000 sheets, you will get 2 knives and needles.

20Pcs



03 FL-1310-TPE

Material: TPE Size: 180 X 120mm
Thickness: 0.15mm
Packing: 50pcs/box, 20 boxes/carton
If you place an order of 2,000 sheets, you will get 2 knives and needles.

50pcs



04 FL-1310-TPU

Material: TPU/TPU Matte film/TPU Matte Anti-peep film
Size: 180 X 120mm
Thickness: 0.15mm
Packing: 50pcs/box, 20 boxes/carton
If you place an order of 2,000 sheets, you will get 2 knives and needles.

50Pcs



07 FL-1311-TPU

Material: TPU matte film Size: 200 X 280mm
Thickness: 0.15mm
Packing: 20pcs/box, 10 boxes/carton
If you place an order of 2,000 sheets, you will get 2 knives and needles.

20Pcs



08 FL-1311-TPU

Material: TPU matte anti-peep film
Size: 200 X 280mm Thickness: 0.15mm
Packing: 20pcs/box, 10 boxes/carton
If you place an order of 2,000 sheets, you will get 2 knives and needles.

20Pcs



STORAGE AND LIFE





FN02

Material: ABS+PP+POM+Hardware + Silicone
 Input voltage/current: DC5V/800mA
 Battery type: Ion battery (18650)
 Charging time: about 2h Gears: 2 gears
 Product weight: 125g Rated power: 2.5W
 Battery capacity: 1200mAh Working time: 2 files: about 2h
 1st gear about 5h Charging input port: Micro USB
 Product size: 58*60*192mm
 Weight: 116g










SD2501

Interface: USB3.0
 Read and write speed: 120MB MAX
 Durability: Waterproof, cold-resistant, heat-resistant
 Capacity: 2g/4g-8g/16g/32g/64g/128g
 Operating temperature: 0°C~45°C
 Storage temperature: -10°C~75°C
 Color: Black orange









SD2601

Interface: USB3.0
 Read and write speed: 150MB/second
 Compatibility: USB3.0
 Capacity: 8g/16g/32g/64g
 Operating temperature: 0°C~45°C
 Storage temperature: -10°C~75°C
 Color: Black orange









WB01

Material: ABS+TPU
 Product size: 120*230*11.5mm
 Weight: 58.9g








171

172



KB03



GM06

GM07



New

KB01

Wireless Version: V5.1
Material: Leather + Microfiber
Battery capacity: 500mAh
Working Voltage: 3.2~4.2V
Using Distance: 10m
Applicable size: 10.9&11 inches/12.9 inches
Color: White/Black



New

KB04

Material: ABS+PC/Microfiber/Hardware
Battery capacity: 500mAh Charging current: 420mA
Using Distance: 10m Charging interface: Type-C
Charging time: 1-2h Battery life with light on: 12h
Battery life with light off: 100h
Standby time: >100 days
Keyboard life: >3 million times Size: 252*195*16.4mm
Weight: 630g Color: White/Black



New

KB02

Wireless Version: V5.1
Battery capacity: 500mAh
Working Voltage: 3.2~4.2V
Using Distance: 10m
Applicable size: 10.9&11 inches/12.9 inches
Color: Black



New

KB05

Material: ABS+PC/Microfiber/Hardware
Battery capacity: 420mAh Charging current: 200mA
Using Distance: 10m Charging interface: Type-C
Charging time: 2.5h Battery life with light on: 5h
Battery life with light off: 30 days
Battery life with lights on: 5h
Standby time: about 60 days
Keyboard life: 3 million times Size: 245*150*7.7mm
Weight: 220g Color: White/Black/Blue



New

KB03

Wireless version: V5.1 Battery capacity: 140mAh
Material: aluminum alloy+ABS+silicone Number of keys: 64 keys
Sleep time: 10 minutes without operation
Charging interface: Type-C Standby time: 90 days
Working hours: 45h Compatible system: Windows, iOS, Android
Expanded size: 304.31*98.12mm Folded size: 152*98.12mm
Weight: 216g



New

KB06

Material: ABS+PC/Microfiber/Hardware
Battery capacity: 500mAh Charging current: 200mA
Using Distance: 10m Charging interface: Type-C
Charging time: 2.5h Battery life with light on: 5h
Battery life with light off: 30 days
Battery life with lights on: 5h
Standby time: about 60 days
Keyboard life: >3 million times Size: 245*175*7.7mm
Weight: 270g Color: White/Black/Blue





GM01



GM02

New



KB07

Battery capacity: 500mAh Working current: 30mA
Working mode: 2.4G+BT1+BT2
Working Scope: 3 position in optical technology
DPI: 800-1200-1600 Product material: ABS
Size: 113*57*25mm Weight: 69±5g
Color: Black

- Super long battery life
- Silent Design
- Type-C Charging Port



New



GM02

Material: PC+aluminum alloy
+tempered glass
Interface: Type-C
Input voltage: 5V/9V/12V
Wireless charging output:
15W/10W/7.5W/5W
Product size: 59.5*25mm
Weight: 62g



New



GM01

Material: ABS+aluminum alloy+magnet
Surface technology: electroplating
Interface: Type-C
Input voltage: 5V
Product size: 59.5*25mm
Weight: 62g



New



GM03

Product material: ABS+TPE
Microphone sensitivity: -42±3db
Frequency range: 20Hz-20khz
Product impedance: 16Ω
Speaker size: 10mm
Product interface: 3.5mm
Product line length: 120cm
Product weight: 21.2g
Product color: red
Working temperature: -20℃-60℃





SW1602

Wristband material: silicone
Wristband size: 260mm
Strap cover: Silicone
Suitable for wrist circumference: 150-205mm
Table tongue clasp: 304 stainless steel
Charging method: magnetic charging cable

5.0
Android

9.0
iOS

2.0
HarmonyOS



SW1606-Smart Watch Ultra

Main control chip CPU: Realtek RTL8762DT
Compatible systems: Android5.0 and above; iOS 9.0 and above
Shell Material: Zinc Alloy Wristband material: silicone strap
Flash memory: 128MB Waterproof grade: IP68 Charging time: about 3.5H
Battery life: 7-15 days Screen size: 1.96 inches Resolution: IPS 320*390
Wireless version: 5.0 Heart rate: HX3605 Touch type (Type): full touch screen Battery type: polymer lithium battery
Capacity: 3.7V/320mAh Charging method: wireless charging
Product size: 49*44*12mm Wristband size: total length 226.6mm, 21mm wide
Product weight: 72g Working temperature: 0-50°C

Phone Calls
Reminding

Heart Rate
Alarm Reminder

SMS
Notification

IP68
Waterproof

180 Kinds
Sport Mode

Scan code
to pay



SW1606-Wireless Charger

Input: 4.9v~5.5v=1A Max
Output: 2.5W Max

2.5w





SW1607

New



SW1609

Main control chip CPU: RTL8762DT
Compatible systems: Android5.0/iOS9.0+
Shell material: zinc alloy Wristband Material: silicone strap/steel strap/belt
RAM: 192KB ROM: 128M (External Flash) Waterproof grade: IP67
Charging time: 160min Battery life: 5-7 days
Screen size: 1.39 inches Resolution: IPS 360*360 Wireless version: 5.1
Touch type (Type): full touch screen Battery type: polymer lithium battery
Capacity: 3.7V/270mAh Charging method: wireless charging
Working temperature: 0-50°C



New



SW1610

Main control chip CPU: AC6954
Compatible systems: Android5.0/iOS9.0+
Shell material: zinc alloy Wristband Material: Silicone strap/strap
RAM: 192KB ROM: 16Mb (put code)+64Mb (for dial UI)
Waterproof grade: IP67
Charging time: 180min Battery life: 3-5 days
Screen size: 1.39 inches Resolution: IPS 240*240 Wireless version: 5.1
Touch type (Type): full touch screen Battery type: polymer lithium battery
Capacity: 3.7V/250mAh Charging method: wireless charging
Working temperature: 0-50°C



New



SW1611

Wireless version: 5.1 Main control chip CPU: AC6954
Compatible systems: Android 4.4+/iOS8.0+
Shell material: zinc alloy Wristband material: silicone strap
Memory RAM: 192KB ROM: 16Mb (for code) + 64Mb (for dial UI)
Waterproof grade: IP67 Charging time: 160min
Battery life: 3-5 days Screen size: 1.8 inches
Resolution: IPS 240*286 Touch type (Type): full touch screen
Battery type: polymer lithium battery Capacity: 3.7V/240mAh
Charging method: wireless charging Working temperature: 0-50°C



New

SW1612

Main control chip CPU: JL7012 Shell material: zinc alloy
Wristband material: silicone strap Memory RAM: 640+32KB
ROM: 128M (plug-in Flash) Waterproof level: daily waterproof
Charging time: 160min Battery life: 3 days
Screen size: 2.01 inches Resolution: IPS 240*296
Wireless version: BT3.0/Ble5.1 Touch type (Type): full touch screen
Battery type: polymer lithium battery Capacity: 3.7V/210mAh
Charging method: wireless charging Product weight: 40.01g (excluding case)
Working temperature: 0-50°C



New

SW1613

Main control chip CPU: JL7012 Shell material: zinc alloy
Wristband material: silicone strap Memory RAM: 640+32KB
ROM: 128M (plug-in Flash storage dial UI)+128M (plug-in Flash to store music)
Waterproof grade: IP67 Battery life: 3-5 days
Screen size: 1.91 inches Resolution: IPS 240*296
Wireless version: BT3.0/Ble5.1 Touch type (Type): full touch screen
Battery type: polymer lithium battery Capacity: 3.7V/220mAh
Charging method: wireless charging Working temperature: 0-50°C
Product weight: 36.1g (excluding watch case)



New



SW1607

Main control chip CPU: RTL8763E
Compatible systems: Android5.0 above; iOS 9.0 or above, HarmonyOS 2.0
Shell material: zinc alloy Wristband Material: Silicone Strap
Flash memory: 128MB Waterproof grade: IP68
Charging time: 2-3H Battery life: about 4 days, about 7 days without calls
Screen size: 1.39 inches Resolution: 360*360 Wireless version: 5.2
Heart rate: dynamic heart rate Touch type (Type): full touch screen
Battery type: polymer lithium battery Capacity: 3.7V/300mAh
Charging method: Magnetic charging Product size: 49*52*12.3mm
Wristband size: total length 218mm, Width 22mm
Product weight: 69.4g Working temperature: 0-45°C



New



SW1608

Main control chip CPU: ZK8918C
Compatible systems: Android5.0 above; iOS 9.0 above
Shell material: zinc alloy Wristband Material: Silicone Strap
Flash memory: 32MB Waterproof grade: IP67
Charging time: about 3H Battery life: 7-15 days
Screen size: 1.85 inches Resolution: IPS 240*285 Wireless version: 5.0
Touch type (Type): full touch screen Battery type: polymer lithium battery
Capacity: 3.7V/200mAh Charging method: wireless charging
Product size: 44*38.3*11.35mm
Wristband size: total length 258mm, Width 21.5mm
Product weight: 48.3g Working temperature: 0-50°C





SW1611

Wireless version: 5.1 Main control chip CPU: AC6954
Compatible systems: Android 4.4+/IOS8.0+
Shell material: zinc alloy Wristband material: silicone strap
Memory RAM: 192KB ROM: 16Mb (for code) + 64Mb (for dial UI)
Waterproof grade: IP67 Charging time: 160min
Battery life: 3-5 days Screen size: 1.8 inches
Resolution: IPS 240*286 Touch type (Type): full touch screen
Battery type: polymer lithium battery Capacity: 3.7V/240mAh
Charging method: wireless charging Working temperature: 0-50°C



SW1614

Main control chip CPU: RTK8763EWE Shell material: ABS+zinc alloy
Wristband material: silicone strap Memory RAM: RAM640KB ROM128Mb
Waterproof grade: IP68 Battery life: 5-7 days
Screen size: 2.02 inches Resolution: 320*386
Wireless version: BT5.1 Touch type (Type): full touch screen
Battery type: polymer lithium battery Capacity: 400mAh
Charging method: magnetic suction Charging time: 2.5H
Product weight: 59.44g Working temperature: 0-50°C



SW1612

Main control chip CPU: JL7012 Shell material: zinc alloy
Wristband material: silicone strap Memory RAM: 640+32KB
ROM: 128M (plug-in Flash) Waterproof level: daily waterproof
Charging time: 160min Battery life: 3 days
Screen size: 2.01 inches Resolution: IPS 240*296
Wireless version: BT3.0/Ble5.1 Touch type (Type): full touch screen
Battery type: polymer lithium battery Capacity: 3.7V/210mAh
Charging method: wireless charging Product weight: 40.01g (excluding case)
Working temperature: 0-50°C



SW1615

Main control chip CPU: JL7012 Shell material: zinc alloy
Wristband material: silicone strap Memory RAM: 128Mb
Waterproof grade: daily waterproof Battery life: 3-4 days
Screen size: 2.1 inches Resolution: IPS 330*390
Wireless version: BT 3.0/5.0 Touch type (Type): full touch screen
Battery type: polymer lithium battery Capacity: 3.7V/220mAh
Charging method: Wireless charging Charging time: 2-3H
Product weight: 57g Working temperature: 0-50°C



SW1613

Main control chip CPU: JL7012 Shell material: zinc alloy
Wristband material: silicone strap Memory RAM: 640+32KB
ROM: 128M (plug-in Flash storage dial UI)+128M (plug-in Flash to store music)
Waterproof grade: IP67 Battery life: 3-5 days
Screen size: 1.91 inches Resolution: IPS 240*296
Wireless version: BT3.0/Ble5.1 Touch type (Type): full touch screen
Battery type: polymer lithium battery Capacity: 3.7V/220mAh
Charging method: wireless charging Working temperature: 0-50°C
Product weight: 36.1g (excluding watch case)



SW1617

Main control chip CPU: JL7012 Shell material: ABS+PC
Wristband material: silicone strap Memory RAM: Flash:128Mb
Waterproof grade: IP68 Battery life: 4-7 days
Screen size: 1.43 inches Resolution: 466*466
Wireless version: BT5.3 Touch type (Type): AMOLED
Battery type: polymer lithium battery Capacity: 300mAh
Charging method: magnetic suction Charging time: 2H
Product weight: 41.29g Working temperature: 0-50°C





WA01

- Size: 38/40/41mm
- * Material: High quality eco-friendly silicone;
 - * Multi-color matching, any versatile;
 - * Skin-friendly and soft, feel comfortable;
 - * For iwatch1/2/3/4/5/6/7/8/SE.
- Size: 42/44/45/49mm
- * Material: High quality eco-friendly silicone;
 - * Multi-color matching, any versatile;
 - * Skin-friendly and soft, feel comfortable;
 - * For iwatch1/2/3/4/5/6/7/8/SE/Ultra.
- Color: Midnight/white/yellow/black/
Midnight Blue/star Color/alfalfa/orange



WA05

- Size: 38/40/41mm
- * Material: high-quality environmentally friendly silicone + precision steel buckle
 - * Dimensions: 38/40/41mm
 - * Multi-color collocation, any match
 - * Skin-friendly and soft, comfortable to touch,
 - * For iwatch1/2/3/4/5/6/7/8/SE
- Size: 42/44/45/49mm
- * Material: high-quality environmentally friendly silicone + precision steel buckle
 - * Dimensions: 42/44/45/49mm
 - * Multi-color collocation, any match
 - * Skin-friendly and soft, comfortable to touch,
 - * For iwatch1/2/3/4/5/6/7/8/SE/Ultra
- Color: Blue/Gold/Black/Silver/Grey/Midnight blue



WA02

- Size: 38/40/41mm
- * Material: Nylon Braid
 - * Multi-color matching, any versatile 100% light, thin and flexible, the strap is strong and elastic, secure and convenient to wear.
 - * For iwatch1/2/3/4/5/6/7/8/SE
- Size: 42/44/45/49mm
- * Material: Nylon Braid
 - * Multi-color matching, any versatile 100% light, thin and flexible, the strap is strong and elastic, secure and convenient to wear.
 - * For iwatch1/2/3/4/5/6/7/8/SE/Ultra
- Color: Orange/star Color/green/black



WA03

- Size: 38/40/41mm
- * Material: Nylon Braid
 - * Multi-color matching, any versatile
 - * Double-layer nylon weave, high strength and wear resistance, soft and dense, convenient snap interface, more convenient installation and disassembly
 - * For iwatch1/2/3/4/5/6/7/8/SE
- Size: 42/44/45/49mm
- * Material: Nylon Braid
 - * Multi-color matching, any versatile
 - * Double-layer nylon weave, high strength and wear resistance, soft and dense, convenient snap interface, more convenient installation and disassembly
 - * For iwatch1/2/3/4/5/6/7/8/SE/Ultra
- Color: Yellow With Beige/blue With Grey/black With Grey



WA04

- Size: 38/40/41mm
- * Material: high-quality environmentally friendly silicone + precision steel buckle
 - * Dimensions: 38/40/41mm
 - * Multi-color collocation, any match
 - * Skin-friendly and soft, comfortable to touch,
 - * For iwatch1/2/3/4/5/6/7/8/SE
- Size: 42/44/45/49mm
- * Material: high-quality environmentally friendly silicone + precision steel buckle
 - * Dimensions: 42/44/45/49mm
 - * Multi-color collocation, any match
 - * Skin-friendly and soft, comfortable to touch,
 - * For iwatch1/2/3/4/5/6/7/8/SE/Ultra
- Color: Blue/Gold/Black/Silver/Grey/Midnight blue





WS01



AP01



WS01

Size: 49mm

- * Shell-film integrated protective case, suitable for Apple watch Ultra, comprehensive protection, scratch-resistant and non-slip, sensitive to touch;
- * Hollow-out design on the back, it can be charged without removing the protective case, which is practical and convenient;
- * High-definition and high-transparency, original picture quality;
- * Multi-color optional, match as you like.

Color: Transparent/Black/White/Silvery/Midnight Blue
Star Color/orange



WS02

Size: 41/45mm

- * Shell-film integrated protective case, suitable for Apple watch 7/8, full protection, anti-scratch and non-slip, sensitive to touch;
- * Hollow-out design on the back, it can be charged without removing the protective case, which is practical and convenient;
- * High-definition and high-transparency, original picture quality;
- * Multi-color optional, match as you like.

Color: Transparent/Black/White/Silvery/Midnight Blue
Star Color/Translucent color



New



AP01

Pen body material/process: Aluminum Alloy/Baking Paint
battery capacity: Lithium battery 3.7V 90mAh
Charging voltage: DC 5V Charging current: 100mA
Use time: 7h Charging time: about 50 minutes
Diameter: 9mm Charging interface: no
Overall product length: 166.33 mm
Pen tip diameter: 1.5mm (original nib)
Smart power saving: 5 minutes idle sleep
Power display: wireless screen display Weight: 14.6g



New



AP02

Pen body material/process: Aluminum Alloy/Baking Paint
battery capacity: Lithium battery 3.7V 140mAh
Charging voltage: DC 5V
Charging current: 300mA Use time: 7h
Charging time: about 40 minutes Diameter: 9mm
Charging interface: Top Lightning charging port
Overall product length: 167.6 mm Pen tip diameter: 1.9mm
Smart power saving: 5 minutes idle sleep
Power display: wireless screen display Weight: 14.6g





New



AP03

Pen body material/process: Aluminum Alloy/Baking Paint
 Battery capacity: Lithium battery 3.7V 140mAh
 Charging voltage: DC 5V Charging current: 300mA
 Use time: 7h Charging time: about 40 minutes
 Diameter: 9mm Charging interface: Top Type-C charging port
 Overall product length: 167.6 mm Pen tip diameter: 1.9mm
 Smart power saving: 5 minutes idle sleep
 Power display: wireless screen display Weight: 14.6g



New



AP04

Pen body material/process: Aluminum Alloy/Baking Paint
 Battery capacity: Lithium battery 3.7V 90mAh
 Charging voltage: DC 5V Charging current: 100mA
 Use time: 7h Charging time: about 50 minutes
 Diameter: 9mm
 Charging method: magnetic suction wireless charging
 Overall product length: 166.47mm Nib diameter: 1.5mm (original nib)
 Smart power saving: 10 minutes idle sleep
 Power display: digital display Weight: 12.8g



New



AP05

Pen body material/process: Aluminum Alloy/Baking Paint
 Battery capacity: Lithium battery 3.7V 140mAh
 Charging voltage: DC 5V Charging current: 500mA
 Use time: 9h Charging time: about 40 minutes
 Diameter: 9mm Charging interface: Type-C
 Overall product length: 165.29 mm Pen tip diameter: 1.9mm
 Smart power saving: 120 minutes automatic power off
 Power display: indicator light Weight: 14.6g



New



AP06

Pen body material/process: Aluminum Alloy/Baking Paint
 Battery capacity: Lithium battery 3.7V 140mAh
 Charging voltage: DC 5V Charging current: 450mA
 Use time: 10h Charging time: about 40 minutes
 Diameter: 9mm Charging interface: Type-C
 Overall product length: 164.4mm Nib diameter: 1.5mm
 Smart power saving: 10 minutes idle sleep
 Power display: indicator light Weight: 12.7g





HUB01-6 IN 1

Product material: aluminum alloy + ABS
Working voltage: 5-20V
Line length: 10cm
Input: Type-C
PD port: 20V/3A 60W (Max)
USB3.0: 5Gbps (Max)
USB2.0: 480Mbps (Max)
HDMI: 4K@30Hz(Max.)
RJ45: 100Mbps (Max.)
Product size: 100*48*15mm

480 Mbps
USB2.0
5 Gbps
USB3.0
4K
HDMI
100 Mbps
RJ45



HUB03-6 IN 1

Product material: aluminum alloy + ABS
Working voltage: 5-20V
Line length: 10cm
Input: Type-C
PD port: 20V/5A 100W (Max)
USB3.0: 5Gbps (Max)
USB2.0: 480Mbps (Max)
HDMI: 4K@30Hz(Max.)
Product size: 255*31.4*9.9mm

480 Mbps
USB2.0
5 Gbps
USB3.0
4K
HDMI
60 MB/s
SD/TF 2.0



HUB02-4 IN 1

Product material: aluminum alloy + ABS
Working voltage: 5-20V
Line length: 10cm
Input: Type-C
VGA: 1080P60Hz
PD port: 20V/5A 100W (Max)
USB3.0: 5Gbps (Max)
HDMI: 4K@30Hz(Max.)
Product size: 210*40.7*13.9mm

100W
PD Port
5 Gbps
USB3.0
4K
HDMI
1080
VGA



HUB04-3 IN 1

Product material: aluminum alloy + ABS
Working voltage: 5-20V
Line length: 10cm
Input: Type-C
PD port: 20V/5A 100W (Max)
USB3.0: 5Gbps (Max)
HDMI: 4K@30Hz(Max.)
Product size: 67.8*30.5*9.1mm

5 Gbps
USB3.0
4K
HDMI
100W
PD Power Port



GIFT BOX & SET



30
Pcs/Set

S-DC09

Length: 100cm
Outer quilt material: PVC
Core: 44 0.1 copper wires, supporting data transmission
Features:
Stepped plug design, compatible with mobile phone case
Packaging: Canned, 30PCS a can (black 10PCS, white 10PCS, red 5PCS, yellow 5PCS)



20
Pcs/Set

HS656

Material: ABS ear shell, TPE wire
Microphone: with microphone controller
Wire control: play/pause, answer/hang up control
Packaging: 20PCS (10PCS white, 10PCS black)
Length: 120mm
Horn: 14 mm
Audio plug: 3.5mm



5
Pcs/Set

CC528

Material: Metal+PC
Function: Dual USB output, multiple circuit protection
USB Ports: 2 X USB
Input: 12-24V
USB1/2 output: 5V/2.4A Max
Dual USB total output: 5V/2.4A (Max)
Size: 25.1 X 57.3 X 25.1mm
Color: Blue/Silver 5PCS/Packing





CE11Q

Material: Flame-retardant PC+ABS
Size: 47 X 25 X 88mm
Output: 5V / 3A
Packaging: Equipped with plug-in card packaging, 20PCS packaging
Accessories: European standard pin
Color: White



CA12

Material: Flame-retardant PC+ABS
Size: 47 X 25 X 88mm
Output: 5V / 2.4A
Packaging: Equipped with plug-in card packaging, 20PCS packaging
Accessories: US plug
Color: White



CA11Q

Material: Flame-retardant PC+ABS
Size: 47 X 25 X 88mm
Output: 5V / 3A
Packaging: Equipped with plug-in card packaging, 20PCS packaging
Accessories: European standard pin
Color: White



CE12

Material: Flame-retardant PC+ABS
Size: 47 X 25 X 88mm
Output: 5V / 2.4A
Packaging: Equipped with plug-in card packaging, 20PCS packaging
Accessories: European standard pin
Color: White



AUTOMOBILE PRODUCTS



VC001



VC004



VC001

Suction: 5000pa
Power: 50W
Input voltage: DC-5V-2A
Battery capacity: 14.4Wh
Battery life: 16min Charging time: 3.5h
Product size: 60*235*60mm
Weight: 409g
Car, home, office, multi-application scenario use




New



VC004

Material: ABS+aluminum alloy
Product size: 276*57mm Weight: 493.45g
Colour: Black Input: 5V/2A
Power: 85W Noise: <85dB
Battery capacity: 11.1V/2000mAh
Charging time: about 270min
Suction power: First gear 7000-8000Pa
Second gear 13000-14000Pa





VC001



VC004



CSP001

Material: ABS
 Battery pack: polymer Wireless working voltage: 15V
 Maximum current of wireless working: 6A
 Maximum power of wireless working: 90W
 Battery capacity: 8000mAh
 Charging time: 4h
 Maximum pressure value: 150PSI

New



Car Vacuum



Start Power Supply



Air Pump



Blowing Machine



Power Bank Charging Function



PROJECTION PRODUCTS



TS001

Chip: HI352 Brightness ANSI: 240ANSI LED lamp power: 40W
 Resolution: 1280*720P Image size/distance: 100"~2.95m
 Supported screen ratio: 16:9/4:3 Dynamic contrast: 2000:1
 Stereo speaker power: 3W Power supply: AC 90-240V 50/60Hz
 Power: Normal 46W Standby <0.5W Product size: 124*124*220mm
 Product weight: 995±30g
 Working temperature: -10°C - 50°C



DISPLAY RACK MATERIALS



VV-S01

SKU

200-250 Units

Size(mm)

1200 X 300 X 2400mm

Material

Surface Treatemt

Carving + Spray Paint

Accessories:

Hangers X 5

Hooks X 50

(Glass Door is optional)



VV-S02

SKU

120-150 Units

Size(mm)

700 X 250 X 1800mm

Material

Surface Treatemt

Wooden & Paint

Wooden Frame + Spray Paint

Accessories:

Hangers X 5

Hooks X 30

(Glass Door is optional)



VV-S03

SKU

170-200 Units

Size(mm)

800 X 300 X 1900mm

Material

Surface Treatemt

PVC

PVC Carving + Mounted Picture

Accessories:

Sets Screws X 14

6 Inch 15mm Hook X 30

(Plastic Hook/Metal Hook)



VV-S04

SKU

90-120 Units

Size(mm)

560 X 300 X 1650mm

Material

Surface Treatemt

Iron Frame + PVC sheet

Accessories:

Cross Head Screws X 1

Black Rollers X 4

Screwdriver X 1

Black Metal Hooks X 16 (18cm)



VV-S05

SKU

10-15 Units

Size(mm)

400 X 200 X 400mm

Material

Surface Treatemt

Acrylic

Accessories:

Hook X 6

6 Inch 15mm



VV-S06

SKU

90-120 Units

Size(mm)

580 X 330 X 1700mm

Material

Surface Treatemt

Paperboard + Foamcore Board

Corrugated Paper+ Foamed Board Image

Accessories:

Plastic Hooks X 16

Sets of Plastic Nails X 10

Stainless Steel Tube X 2

Screwdriver X 1




VV-S07

-  SKU
30-50 Units
-  Size(mm)
331 X 195 X 415mm
-  Material
Surface Treatemt
Paper Card +k9
4 Colors Printing
with Matt Lamination
Accessories:
NA



VV-EX01

-  Size(mm)
1000 X 300 X 2400mm
-  Accessories
hook up X 50
-  Material
Surface Treatemt
Wooden structure wood
vener back hole plate
With 5 positive hanging

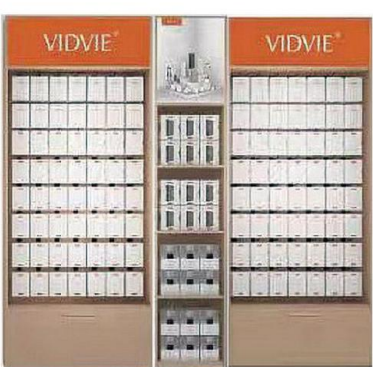

VV-S11

-  SKU
10-15 Units
-  Size(mm)
350 X 200 X 520mm
-  Material
Surface Treatemt
External outdoor spray painting
(oil-based HD) light film
Accessories:
Screws, screwdriver, 12 iron hooks
1 unlocker, installation instructions



VV-S12

-  SKU
10-15 Units
-  Size(mm)
600 X 300 X 1780mm
-  Material
Surface Treatemt
External outdoor spray painting
(oil-based HD) light film
Accessories:
Screws, screwdriver, 19 iron hooks
1 unlocker, installation instructions



VV-S08

-  Weight
N.W: 3.93kg
G.W: 9.48kg
-  Size(mm)
(315+100) X 380 X 570mm
-  Material
Surface Treatemt
4 colors printed matte glue
Accessories:
16 plastic hooks,
10 sets of plastic nails,
1 stainless steel tube,
1 screw knife



VV-S09

-  Weight
N.W: 0.52kg
G.W: 13.98kg
-  Size(mm)
(1400+300) X 380 X 570mm
-  Material
Surface Treatemt
4 colors printed matte glue



VX-S03

-  SKU
50-60 Units
-  Size(mm)
850 X 280 X 2000mm
-  Material
Surface Treatemt
Wooden & Paint
Wooden Frame +Spray Paint +
Carving
Accessories:
Hangers X 2
Hooks X 10



VV-S10

-  SKU
30-50 Units
-  Size(mm)
60 X 180 mm
-  Material
Surface Treatemt
Movable double-sided iron shelf
Accessories:
Hooks X 31



VS-S02

-  SKU
30-50 Units
-  Size(mm)
700 X 250 X 1800mm
-  Material
Surface Treatemt
Wooden & Paint
Wooden Frame + Spray Paint
Accessories:
Hangers X 5
Hooks X 50
(Glass Door is optional)



CHARGER



BRITISH PLUG CHARGER



XL-PLB118

Material: PC flame retardant
Input: AC 100V-240V~50/60Hz 0.7A
Output: USB-A: 5V / 3A, 9V / 2A, 12V / 1.5A (QC 18W)
TYPE-C: 5V / 3A, 9V / 2.25A, 12V / 1.6A (PD 20W MAX)
Size: 75 X 40.2 X 49.7mm Ports: 2 X USB
Color: Black

20W   





XL-PLB119

Material: ABS+PC flame retardant
Input: AC 100V-240V~50/60Hz 0.3A
Output: 5V / 2.4A
Size: 75 X 40.2 X 49.7mm
Ports: 2 X USB
Color: Black

12W  





XL-PLB122

Input: 100-240V~50/60Hz 1.5A Max
Output: Type-C1/C2: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.5A
PPS: 3.3V~11V=5A USB1/2: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A Type-C1+C2: 45W(PPS: 3.3V~11V=4.05A)+20W
Type-C1+USB1/2: 45W+18W Type-C2+USB1/2: 5V=3.6A 18W
USB1+USB2: 5V=3.6A 18W Type-C1+Type-C2+USB1+USB2: 45W+5V=3.6A 18W Size: 48.5*92*43mm Product weight: 151.6g
Operating temperature: -10°C-50°C

70W  





XL-PLB123

Input: 100-240V~50/60Hz 1.5A Max
Output: Type-C1/C2: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.5A
PPS: 3.3V~11V=5A USB1/2: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A, 20V=1.5A Type-C1+C2: 45W(PPS: 3.3V~11V=4.05A)+20W
Type-C1+USB1/2: 45W+18W Type-C2+USB1/2: 5V=3.6A 18W
USB1+USB2: 5V=3.6A 18W Type-C1+Type-C2+USB1+USB2: 45W+5V=3.6A 18W Size: 42*69*35mm Product weight: 215g
Operating temperature: -10°C-50°C

70W  



EUROPEAN PLUG CHARGER



XL-PLM218

Material: PC flame retardant
Input: AC 100V-240V~50/60Hz 0.7A
Output: USB-A: 5V / 3A, 9V / 2A, 12V / 1.5A (QC 18W)
TYPE-C: 5V / 3A, 9V / 2.25A, 12V / 1.6A (PD 20W MAX)
Size: 80 X 40.2 X 27mm
Ports: 2 X USB Color: Black

20W Qualcomm Quick Charge 3.0 USB-C PD



XL-PLM219

Material: PC flame retardant
Input: AC 100V-240V~50/60Hz 0.3A
Output: 5V / 2.4A
Size: 80 X 40.2 X 27mm
Ports: 2 X USB
Color: Black

12W USB



XL-PLM222

Input: 100-240V~50/60Hz 1.5A Max
Output: Type-C1/C2: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.5A
PPS: 3.3V~11V=5A USB1/2: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A,
20V=1.5A Type-C1+C2: 45W(PPS: 3.3V~11V=4.05A)+20W
Type-C1+USB1/2: 45W+18W Type-C2+USB1/2: 5V=3.6A 18W
USB1+USB2: 5V=3.6A 18W Type-C1+Type-C2+USB1+USB2:
45W+5V=3.6A 18W Size: 48.5*96*43mm Product weight: 139.3g
Operating temperature: -10°C~50°C

70W USB-C USB-A



XL-PLM223

Input: 100-240V~50/60Hz 1.5A Max
Output: Type-C1/C2: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.5A
PPS: 3.3V~11V=5A USB1/2: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A,
20V=1.5A Type-C1+C2: 45W(PPS: 3.3V~11V=4.05A)+20W
Type-C1+USB1/2: 45W+18W Type-C2+USB1/2: 5V=3.6A 18W
USB1+USB2: 5V=3.6A 18W Type-C1+Type-C2+USB1+USB2:
45W+5V=3.6A 18W Size: 42*69*35mm Product weight: 215g
Operating temperature: -10°C~50°C

70W USB-C USB-A



US PLUG CHARGER



XL-PLM318

Material: PC flame retardant
Input: AC 100V-240V~50/60Hz 0.7A
Output: USB-A: 5V / 3A, 9V / 2A, 12V / 1.5A (QC 18W)
TYPE-C: 5V / 3A, 9V / 2.25A, 12V / 1.6A (PD 20W MAX)
Size: 43 X 40.7 X 28mm
Ports: 2 X USB Color: Black

20W Qualcomm Quick Charge 3.0 USB-C PD



XL-PLM319

Material: PC flame retardant
Input: AC 100V-240V~50/60Hz 0.3A
Output: 5V / 2.4A
Size: 59.2 X 40.2 X 27mm
Ports: 2 X USB
Color: Black

12W USB



XL-PLM322

Input: 100-240V~50/60Hz 1.5A Max
Output: Type-C1/C2: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.5A
PPS: 3.3V~11V=5A USB1/2: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A,
20V=1.5A Type-C1+C2: 45W(PPS: 3.3V~11V=4.05A)+20W
Type-C1+USB1/2: 45W+18W Type-C2+USB1/2: 5V=3.6A 18W
USB1+USB2: 5V=3.6A 18W Type-C1+Type-C2+USB1+USB2:
45W+5V=3.6A 18W Size: 48.5*82*43mm Product weight: 142.8g
Operating temperature: -10°C~50°C

70W USB-C USB-A




XL-PLM323

Input: 100-240V~50/60Hz 1.5A Max
Output: Type-C1/C2: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.5A
PPS: 3.3V~11V=5A USB1/2: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A,
20V=1.5A Type-C1+C2: 45W(PPS: 3.3V~11V=4.05A)+20W
Type-C1+USB1/2: 45W+18W Type-C2+USB1/2: 5V=3.6A 18W
USB1+USB2: 5V=3.6A 18W Type-C1+Type-C2+USB1+USB2:
45W+5V=3.6A 18W Size: 42*69*35mm Product weight: 215g
Operating temperature: -10°C~50°C

70W USB-C USB-A



WIRELESS SPEAKERS



XL-SP906



XL-SP911



New

10W
Output Power



XL-SP904

Wireless version: V5.3 Product material: silicone
Output power: 10W Battery capacity: 1800mAh
Working time: 23h (50% volume)
Charging time: 3h Product weight: 463g
Product color: black Product size: 100*58*100mm
Operating temperature: 0C°- 55C°



New

24W
Output Power



XL-SP905

Wireless version: V5.3
Product material: Environmentally friendly HB class flame retardant
Output power: 2*12W Battery capacity: 4000mAh (7.4V/2000mA)
Working time: 4h (35% volume) Charging time: 5h
Product weight: 520g Product color: black
Product size: 187.6*62*50mm Operating temperature: -20°-65°C



New

24W
Output Power



XL-SP906

Wireless version: V5.0
Product material: Environmentally friendly two-color tarpaulin
Output power: 2*12W Battery capacity: 3600mAh
Working time: 17h (30% volume) Charging time: 4h
Product weight: 520g Product color: black
Product size: 195*70*70mm Operating temperature: -20°-65°C



New

40W
Output Power



XL-SP907

Wireless version: V5.3
Product material: Environmentally friendly two-color tarpaulin
Output power: 40W Battery capacity: 10000mAh
Working time: 12h (50% volume) Charging time: 4h
Product weight: 870g Product color: black
Product size: 83*232*83mm Operating temperature: -20°-65°C



New

80W
Output Power



XL-SP909

Wireless version: V5.0
Product material: Streamlined iron grid
Output power: 80W Battery capacity: 10400mAh
Working time: 4h (100% volume) Charging time: 4h
Product weight: 1560g Product color: black
Product size: 240*91*82mm Operating temperature: -20°-65°C



New

120W
Output Power



XL-SP911

Wireless version: V5.0 Product material: Streamlined iron grid
Output power: (40W*2+20W*2)120W Battery capacity: 16000mAh
Working time: 7h(35% volume) Charging time: 7h
Product weight: 2650g Product color: black
Product size: 292*112*101mm Operating temperature: -20°-65°C





XL-SP908



XL-SP912

New

60W
Output Power



XL-SP910

Wireless version: V5.0 Product material: Streamlined iron grid
Output power: 60W Battery capacity: 6000mAh(11.1V/2000mAh)
Working time: 2.5h Charging time: 3h
Product weight: 1780g Product color: black
Product size: 205*123*94.7mm Operating temperature: -20°-65°C



New

60W
Output Power



XL-SP908

Wireless version: V5.0
Product material: Environmentally friendly two-color tarpaulin
Output power: 60W Battery capacity: 8000mAh
Working time: 20h (52% volume) Charging time: 5h
Product weight: 1160g Product color: black
Product size: 240*100*72mm Operating temperature: -20°-65°C



New

120W
Output Power



XL-SP912

Wireless version: V5.3
Product material: Environmentally friendly two-color tarpaulin
Output power: 120W Battery capacity: 16000mAh
Working time: 9h (50% volume) Charging time: 7h
Product weight: 2600g Product color: black
Product size: 300*162*120mm Operating temperature: -20°-65°C



New

150W
Output Power



XL-SP913

Wireless version: V5.0 Product material: Streamlined iron grid
Output power: (50W*2+25W*2)150W
Battery capacity: 18000mAh(11.1V/6000mAh)
Working time: 27h(50% volume) Charging time: about 7h
Product weight: 3150g Product color: black
Product size: 350*183*105mm Operating temperature: -20°-65°C





XL-SP915



XL-SP917

XL-SP915

Wireless version: V5.0

Product material: Environmentally friendly HB grade flame retardant silicone

Output power: (45W*2+30W*2)150W

Battery capacity: 24000mAh (3.7V/2000mAh*12)

Working time: 8.15h(50% volume) Charging time: 9h

Product weight: 4250g Product color: black

Product size: 264*253*115mm Operating temperature: -20°-65°C

XL-SP914

Wireless version: V5.0 Product material: Streamlined iron grid

Output power: (45W*2+30W*2)150W

Battery capacity: 24000mAh(3.7V/2000mAh*12)

Working time: 20h(30% volume) Charging time: 8h

Product weight: 4250g Product color: black

Product size: 280*240*120mm Operating temperature: -20°-65°C

XL-SP916

Wireless version: V5.0 Product material: Streamlined iron mesh

Output power: 300W Battery capacity: 40000mAh

Power input: DC 24V/3A Working time: 10h (50% volume)

Charging time: about 3h Product weight: 8.5kg Product color: black

Product size: 472*168*190mm Operating temperature: 0°-45°C

XL-SP917

Wireless version: V5.0 Product material: Streamlined iron grid

Output power: 120W Battery capacity: 12000mAh (11.1V/4000mAh)

Working time: 15h(50% volume) Charging time: 6h

Product weight: 2590g Product color: black

Product size: 230*100*182.7mm Operating temperature: 0°-45°C



XL-SP918



XL-SP921

New

200W
Output Power



XL-SP918

Wireless version: V5.0 Product material: environmentally friendly
HB grade Flame retardant plastic
Output power: 200W Battery capacity: 18000mAh (11.1V/6000mAh)
Working time: 10h (50% volume) Charging time: about 8h
Product weight: 4270g Product color: black
Product size: 260*173*105mm Operating temperature: -20°-65°C

- EQ MULTI-FUNCTION SOUND ADJUSTMENT
- TF CARD PLAYBACK
- TWS DUAL FUNCTION
- Support Wireless Microphone
- Support 3.5mm Monitor Output
- Supports Wired Microphone Connection



New

300W
Output Power



XL-SP919

Wireless version: V5.3 Product material: environmentally friendly
HB grade Flame retardant plastic
Output power: 300W Battery capacity: 30000mAh (18.5V/6000mAh)
Power input: PD fast charging 65W Working time: 12h (50% volume)
Charging time: 3.5h Product weight: 7800g Product color: black
Product size: 295*180*352.7mm Operating temperature: 0°-45°C

- EQ Multi-function Sound Adjustment
- TF card mode
- TWS DUAL FUNCTION
- Support Wireless Microphone
- U disk Model
- Support 3.5mm Monitor Output
- PD fast charge
- Supports Wired Microphone Connection



New

200W
Output Power



XL-SP920

Wireless version: V5.0 Product material: environmentally friendly
HB grade Flame retardant plastic
Output power: 200W Battery capacity: 18000mAh (11.1V/4000mAh)
Power input: 5V/3A Working time: 13h (50% volume)
Charging time: 6h Product weight: 4345g Product color: black
Product size: 400*115.4*215.5mm Operating temperature: 0°-45°C

- EQ Multi-function Sound Adjustment
- TF card mode
- Support Wireless Microphone
- U disk Model
- Support 3.5mm Monitor Output
- 3A fast charge
- Supports Wired Microphone



New

80W
Output Power



XL-SP921

Wireless version: V5.0 Product material: environmentally friendly
HB grade Flame retardant plastic
Output power: 80W Battery capacity: 8000mAh (7.4V/4000mAh)
Power input: 5V/3A Working time: 10h (50% volume)
Charging time: about 4h Product weight: 2473g Product color: black
Product size: 300*110.4*185mm Operating temperature: 0°-45°C

- EQ Multi-function Sound Adjustment
- TF card mode
- Support Wireless Microphone
- U disk Model
- Support 3.5mm Monitor Output
- 3A fast charge
- Supports Wired Microphone





New

150W
Output Power



XL-SP922

Wireless version: V5.0 Product material: environmentally friendly
HB grade Flame retardant plastic
Output power: 150W Battery capacity: 12000mAh(11.1V/4000mAh)
Power input: 5V/3A Working time: 15h (50% volume)
Charging time: about 6h Product weight: 2840g Product color: black
Product size: 261*110*246mm Operating temperature: -20°-65°C



New

300W
Output Power



XL-SP923

Wireless version: V5.0 Product material: environmentally friendly
HB grade Flame retardant plastic
Output power: 300W Battery capacity: 30000mAh(18.5V/6000mAh)
Power input: PD fast charging 60W Working time: 4h (50% volume)
Charging time: 3h Product weight: 7900g Product color: black
Product size: 500*275*160mm Operating temperature: -20°-65°C



New

200W
Output Power



XL-SP924

Wireless version: V5.3 Product material: ABS+iron mesh
Output power: 200W Battery capacity: 20000mAh
Working time: 9h(50% volume) Charging time: 4h30min
Product weight: 4800g Product color: Dark gray
Product size: 325*254*122.5mm Operating temperature: 0°-45°C



New

120W
Output Power



XL-SP925

Wireless version: V5.3 Product material: ABS+iron mesh
Output power: 120W Battery capacity: 12000mAh(7.4v/6000mA)
Working time: 16h(50% volume) Charging time: about 4h
Product weight: 3270g Product color: black
Product size: 181*365*134mm Operating temperature: 0°-45°C



VIDVIE

<https://vidvietech.com/>

Foshan
Office: D1-03, Building D, Nanhai New Economic Industry Center,
No. 1 Xianan Road, Guicheng Street, Nanhai District, Foshan City, Guangdong

Shop NO.1: No. 127, the 1st floor, Guangzhou the thirteen-hongs Culture and Technology Center, Exhibition
Building on the right side of New Asia, No. 37 Xidi Erma Road, Liwan District, Guangzhou

Shenzhen
RmY2-5F-03, No.5 Creative Zone, Yayuan Road, Bantian Street, Longgang District, Shenzhen, China

Shop NO.2: A46-47, 1/F, Yale Smart Wearable International Market, Block D, Electronic & Technology Building,
Huaqiang North, Shenzhen

Contact Us:

✉ business@vidvietech.com

☎ +86 18565066884

☞ Rain-VIDVIE



VIDVIE

Smart phone accessories

VIDVIE® is a registered trademark, owned by Shenzhen Aifeng Chengpin Trading Co., Ltd. Shenzhen Aifeng Chengpin Trading Co., Ltd. has all the right to interpret matters related to this album.
The products displayed in the VIDVIE full-category product catalog are new products as of January 2021. New products on the shelves after January 2021 are not in this catalog. You can consult our sales staff for the latest product information.
If the products shown in this album are revised in the future, please refer to the information provided by the salesperson of our company. This album is for reference only.